

RP-Technik GmbH

Hermann-Staudinger Straße 10-16
63110 Rodgau
 Operator RP Project Team
 Telephone 06106 660280
 Fax
 e-Mail info@rp-group.com

RP Technik KWW013 opal hoch PIKTO einseitig / Data sheet emergency lighting

Luminaire: RP Technik KWW013 opal hoch PIKTO einseitig

Lamps: 6 x HP LED    s

Colour rendering index: 0

Luminous flux: 150 lm

Correction Factor: 1.000

Emergency lighting factor: 1.00

Emergency lighting luminous flux: 150 lm

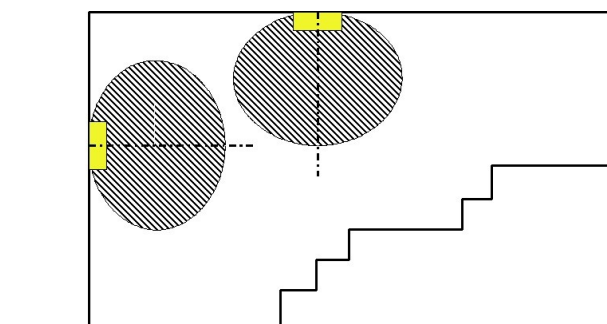
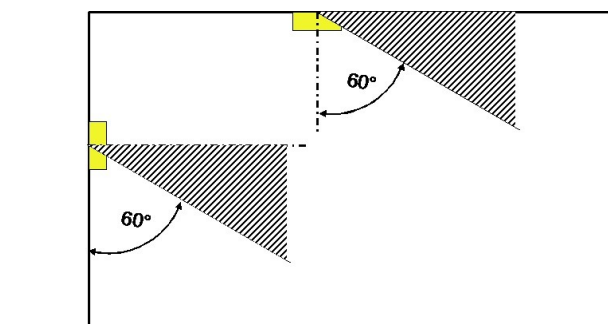
Light output ratio: 30.06

Light output ratio (lower hemisphere): 100.00

Light output ratio (upper hemisphere): 0.00






Glare valuation (Maximum luminous intensity [cd])

	C0	C90	C0 - C360
Gamma 60° - 90°	9.2	5.4	9.2
Gamma 0° - 180°	11.3	10.7	11.3



Distance table for even escape routes

Mounting Height [m]

					
2.50	1.32	4.89	4.48	4.09	1.05
3.00	0.00	4.54	4.13	3.74	0.00
3.50	0.00	3.05	2.53	2.53	0.00
4.00	0.00	1.45	1.08	1.08	0.00
4.50	0.00	0.00	0.00	0.00	0.00

The spacing table is based on the following parameters:

- Maintenance factor: 0.80
- Emergency lighting factor: 1.00
- Minimum illuminance on centre line: 1.00 lx
- Minimum illuminance on half of escape route width: 0.50 lx
- Diversity on the centre line max. 40 : 1
- Width of escape route: 2.00 m