



Art.-Nr: V2W019ML-V4A

Exit sign Centralised power supply systems

**Wall mounting, Central power supply (ML), CPS, 30 m, IP65,
Stainless Steel, Stainless steel**

High-grade, vandal-proof, stainless steel emergency exit sign luminaire for identifying escape and emergency routes with hinge mechanism that is easy to mount and service.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/V2W019ML-V4A



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Stainless Steel
Housing color	Stainless steel
Protection type (IP)	IP65
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V



Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	56 mm
Width	386 mm
Height	240 mm
Weight	6.06
Weight incl. packaging	6.54
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056180
GTIN	4260659563875



TECHNICAL DRAWING

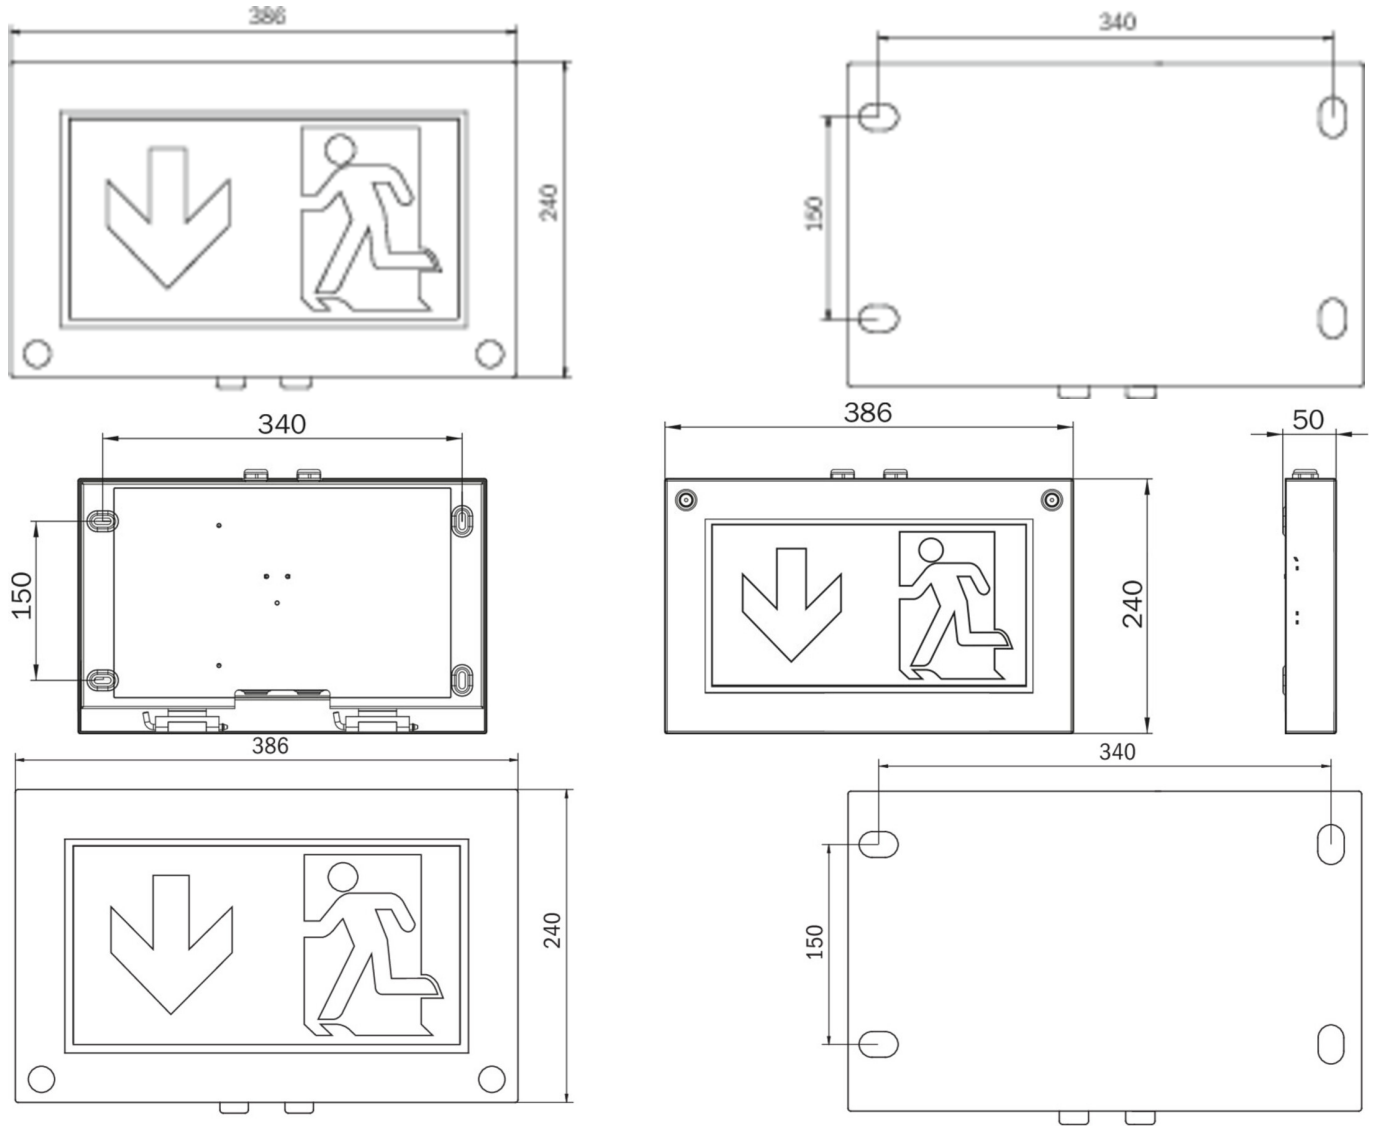

ACCESSORY LIST

BALL2 - Wire mesh guard



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
V2W019ML		Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central

As of: 05.09.2025 - Subject to technical changes and errors.