

RP-Technik GmbH

Hermann-Staudinger Straße 10-16
63110 Rodgau

Operator RP Project Team
Telephone 06106 660280
Fax
e-Mail info@rp-group.com

RP Technik KWW013 wei flach Pikto / Data sheet emergency lighting

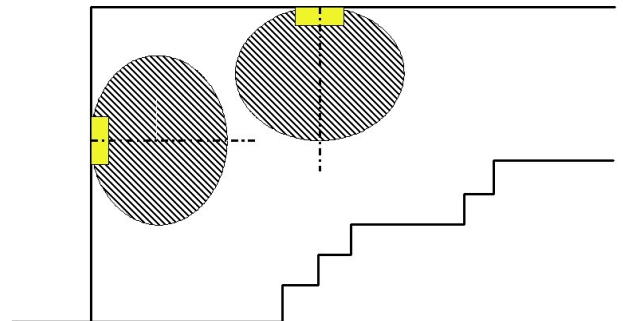
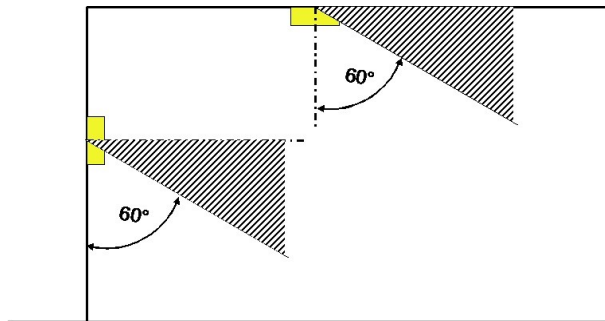
Luminaire: RP Technik KWW013 wei flach Pikto

Lamps: 6 x HP LED s

Colour rendering index:	0
Luminous flux:	150 lm
Correction Factor:	1.000
Emergency lighting factor:	1.00
Emergency lighting luminous flux:	150 lm
Light output ratio:	26.59
Light output ratio (lower hemisphere):	100.00
Light output ratio (upper hemisphere):	0.00





Glare valuation (Maximum luminous intensity [cd])

	C0	C90	C0 - C360
Gamma 60° - 90°	8.5	4.3	8.5
Gamma 0° - 180°	10.7	10.5	10.7



Distance table for even escape routes

Mounting Height [m]

					
2.50	1.17	4.53	4.16	3.79	0.96
3.00	0.00	4.17	3.78	3.42	0.00
3.50	0.00	2.73	2.26	2.26	0.00
4.00	0.00	1.10	0.91	0.91	0.00
4.50	0.00	0.00	0.00	0.00	0.00

The spacing table is based on the following parameters:

- Maintenance factor: 0.80
- Emergency lighting factor: 1.00
- Minimum illuminance on centre line: 1.00 lx
- Minimum illuminance on half of escape route width: 0.50 lx
- Diversity on the centre line max. 40 : 1
- Width of escape route: 2.00 m