



**Art.-Nr: NVKS403WL**  
**Self-contained supply**  
**NVG+Wireless Professional (WL) / - W/1h, 40 W/3h, - W/8h,**  
**230 V (SQW)**

Self-contained battery supply with output voltage 230V/AC square voltage, 2 wire system up to 500m distance. for supply of 1 or 2 luminaires with fluorescent lamps, light bulbs or LED illuminants at 100% luminous flux.

Technical specifications according to DIN - VDA 0108-100 and DIN EN 60598 - 2 - 22. With deep discharge protection and integrated switch - on lock, threshold switch. The supply is handled by a maintenance-free, long life and gas-proof Pb rechargeable battery. The fully electronic and time controlled charging ensures an extended battery life. The LED function and monitoring display shows operating states and faults. A manual activation of a function test is possible through the built-in test button.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information  
[www.rp-group.com/en/item/NVKS403WL](http://www.rp-group.com/en/item/NVKS403WL)




## TECHNICAL DATA

|                     |             |
|---------------------|-------------|
| Certification       | CE, WEEE    |
| Charger             | Yes         |
| Battery compartment | Yes         |
| Supply power 1 h    | - W         |
| Supply power 3 h    | 40 W        |
| Supply power 8 h    | - W         |
| Input voltage AC    | 230 V       |
| Input frequency     | 50 / 60 Hz  |
| Output voltage AC   | 230 V (SQW) |
| Material            | Steel sheet |
| Housing color       | Light grey  |
| Insulation class    | IP54        |
| Depth               | 120 mm      |
| Width               | 300 mm      |
| Height              | 300 mm      |



|                       |               |
|-----------------------|---------------|
| Weight                | kg            |
| Customs tariff number | 85389091      |
| GTIN                  | 4262484980346 |

## TRANS.MASSZEICHNUNG

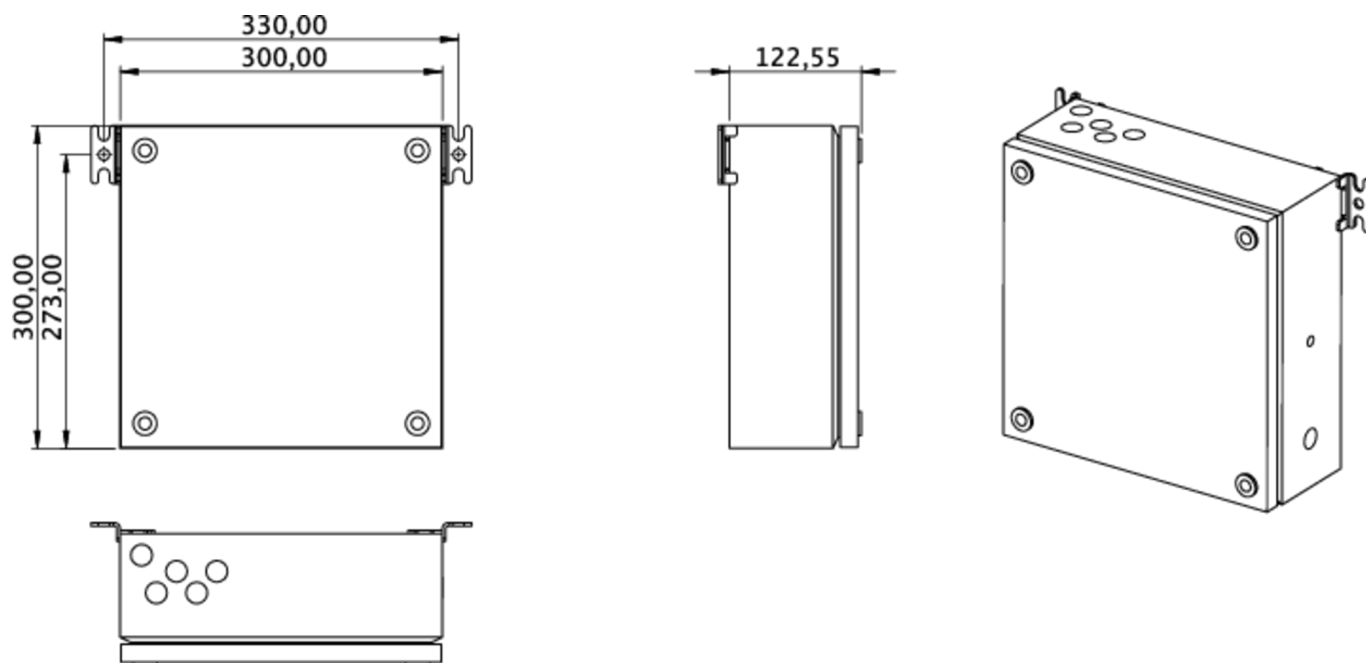

As of: 12.05.2026 - Subject to technical changes and errors.