



Art.-Nr: PMW009ML

Exit sign Centralised power supply systems

Wall mounting, Central power supply (ML), CPS, 20 m, IP65, Plastic, white

Plastic LED emergency exit sign luminaire with convex shaped surround for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.



More information

www.rp-group.com/en/item/PMW009ML



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign, TÜV Rheinland Type approved, ENEC, HACCP
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching



Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,6 W
Power maintained	3,6 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 50 °C
Ambient temperature non-maintained mode	-20 °C to 50 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.67
Weight incl. packaging	0.8
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Customs tariff number	94056120
EAN	4260682149428



TECHNICAL DRAWING

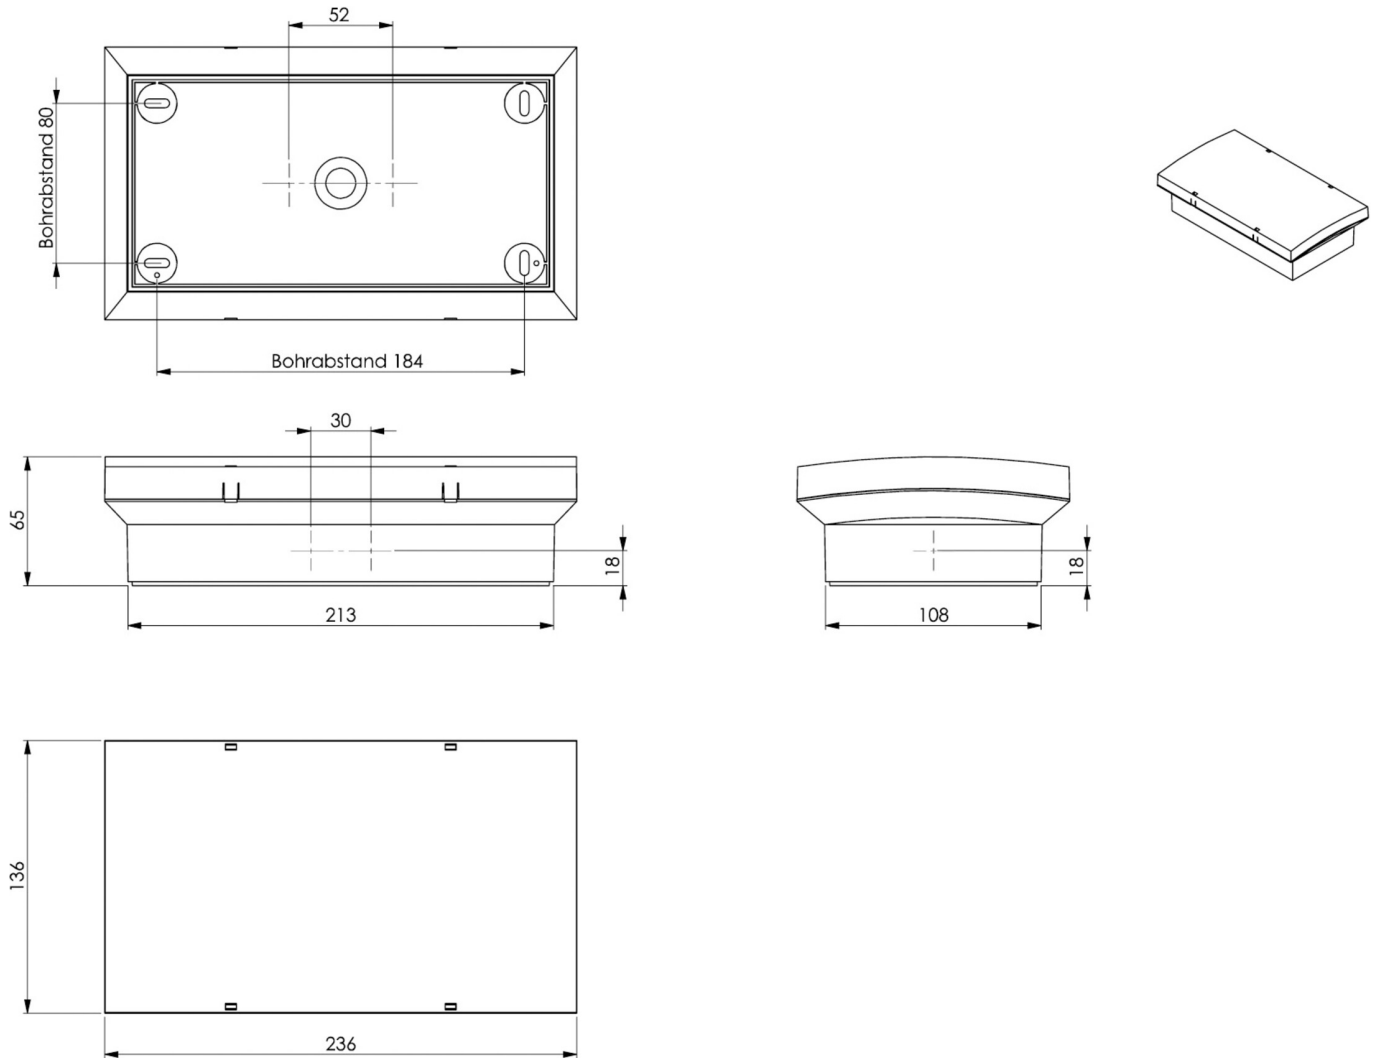

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
PMW039ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 12.02.2025 - Subject to technical changes and errors.