



Art.-Nr: U6E013SC Exit sign Self-contained Recessed wall mounting, SelfControl (SC), 3 h, 22 m, IP40, Metal, White

Metal emergency exit sign luminaire integrated into the wall.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/U6E013SC



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W
Power maintained	4,5 W






Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	65 mm				
Width	280 mm				
Height	160 mm				
Installation length	239 mm				
Installation width	128 mm				
Installation height	65 mm				
Weight	1.2				
Weight incl. packaging	1.47				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Luminous flux mains	220 lm				
Luminous flux emergency	150 lm				
Customs tariff number	94056180				
GTIN	4260123684969				





TECHNICAL DRAWING

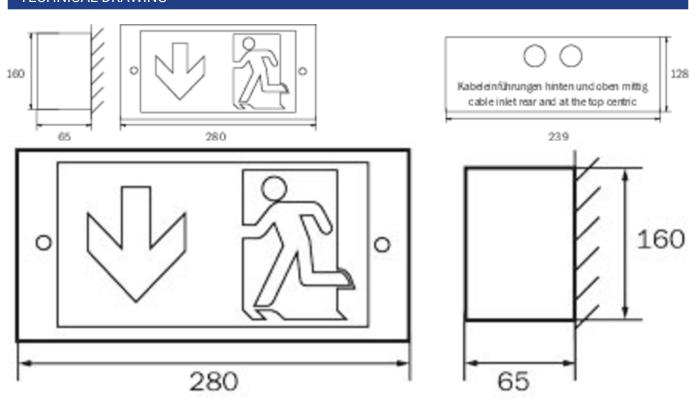

ACCESSORY LIST

U6BE -

RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
U6E013	· 13 >	Without monitoring		RAL 9003						
U6E013WL	₹ →	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 05.09.2025 - Subject to technical changes and errors.