



Art.-Nr: KXU029ML

**Exit sign, Emergency light Centralised power supply systems
Universal, CPS, 30 m, IP40, Polycarbonate, White, Set of
pictograms, Universal mounting**

Innovative plastic emergency exit sign luminaire for universal mounting, in a conically tapering housing producing an appealing look. Suited to inscription on one or two sides.



Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information

www.rp-group.com/en/item/KXU029ML



TECHNICAL DATA


Luminaire type	Exit sign, Emergency light
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, ENEC, TÜV Rheinland Type approved
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching



Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.88
Weight incl. packaging	0.99
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
EOF	1
Customs tariff number	94056120
GTIN	4260659562540



TECHNICAL DRAWING

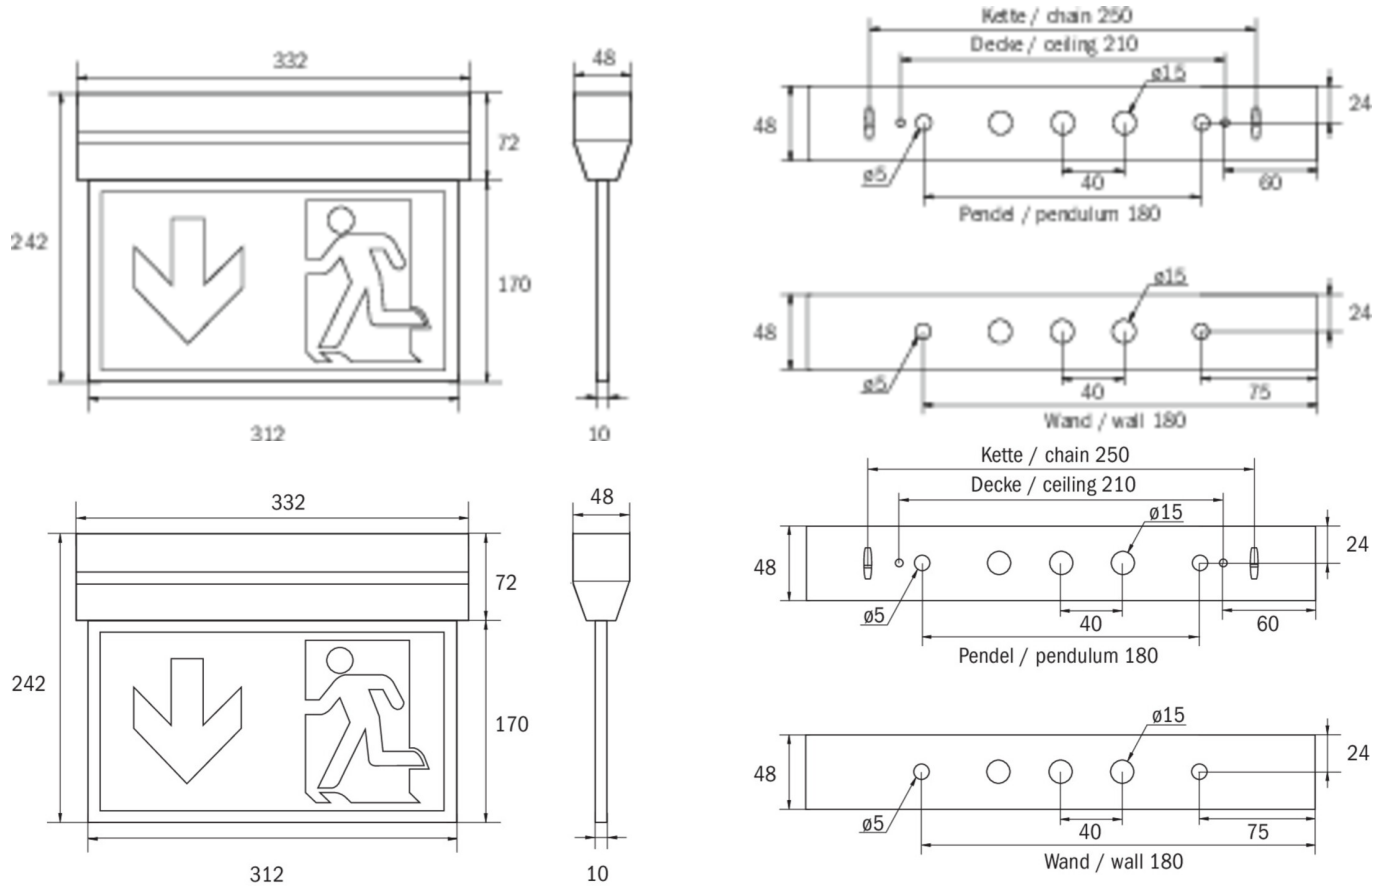

ACCESSORY LIST

- KXE-EB - Installation frame for KX emergency lights: Elegant recessed wall mounting
- AWX001 - AWX wall bracket for emergency lights - 90° flag mounting
- DSA - Wire suspension
- 2PW-EB - Pendant
- 2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white
- KXBE - Concrete installation box for ceiling formwork installation for emergency lighting



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KXU009ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KXU019ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 01.09.2026 - Subject to technical changes and errors.