



Art.-Nr: KEU013SC
Emergency light Self-contained
Universal, 3 h, IP40, Polycarbonate, White, Flexiklick

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information
www.rp-group.com/en/item/KEU013SC




TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W
Power maintained	4,5 W



Power non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	332 mm
Width	48 mm
Height	72 mm
Weight	0.49
Weight incl. packaging	0.53
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	150 lm
Customs tariff number	94056120
GTIN	4260123682606

TECHNICAL DRAWING

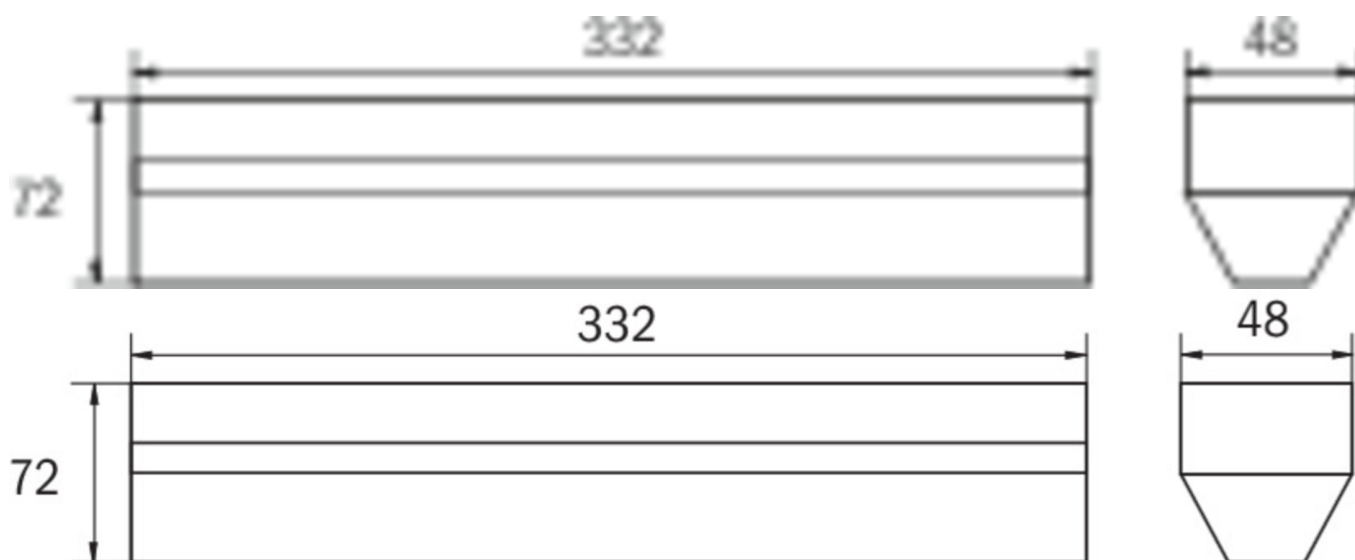



ACCESSORY LIST

DSA - Wire suspension

KEE-EB - Installation frame for KE emergency lights - For discreet ceiling integration

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting

NIMHHT4820Q - Battery

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KEU013		ECB		RAL 9003						
KEU013BC		Bus control		RAL 9003						
KEU013WL		Wireless Professional (WL)	self contained	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 26.07.2026 - Subject to technical changes and errors.