



Art.-Nr: KEU019
Emergency light Centralised power supply systems
Universal, CPS, IP40, Polycarbonate, White, Flexiklick

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information
www.rp-group.com/en/item/KEU019




TECHNICAL DATA

| | |
|------------------------|---------------------------------------------|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE, TÜV Rheinland Type approved, ENEC |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Without monitoring |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 100-254 V |
| Power max. | 4,2 W |



| | |
|-----------------------------------------|---------------------|
| Power maintained | 4,2 W |
| Power non-maintained | 0 W |
| Ambient temperature maintained mode | -25 °C to 40 °C |
| Ambient temperature non-maintained mode | -25 °C to 40 °C |
| Depth | 332 mm |
| Width | 48 mm |
| Height | 72 mm |
| Weight | 0.33 |
| Weight incl. packaging | 0.37 |
| Connection cross-section | 1.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 335 lm |
| Luminous flux emergency | 335 lm |
| Customs tariff number | 94056120 |
| GTIN | 4260123681708 |

TECHNICAL DRAWING

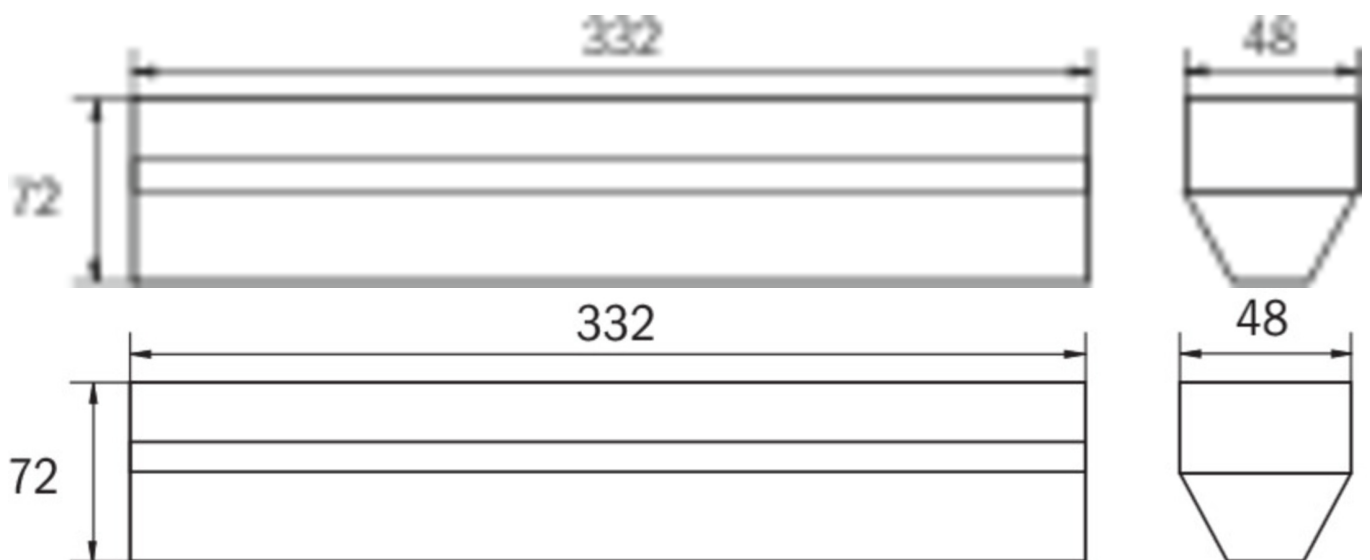



ACCESSORY LIST

DSA - Wire suspension

KEE-EB - Installation frame for KE emergency lights - For discreet ceiling integration

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting

As of: 06.07.2026 - Subject to technical changes and errors.