RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: KLU019
Exit sign Centralised power supply systems Universal, Without monitoring, CPS, 34 m, IP43, Polycarbonate, White, Set of pictograms



Box-shaped plastic emergency exit sign luminaire for universal mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE


More information
www.rp-group.com/en/item/KLU019

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP43
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V

Power max.	4,2 W
Power maintained	4,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	78 mm
Width	390 mm
Height	220 mm
Weight	1.23
Weight incl. packaging	1.39
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
GTIN	4260123686055

TECHNICAL DRAWING

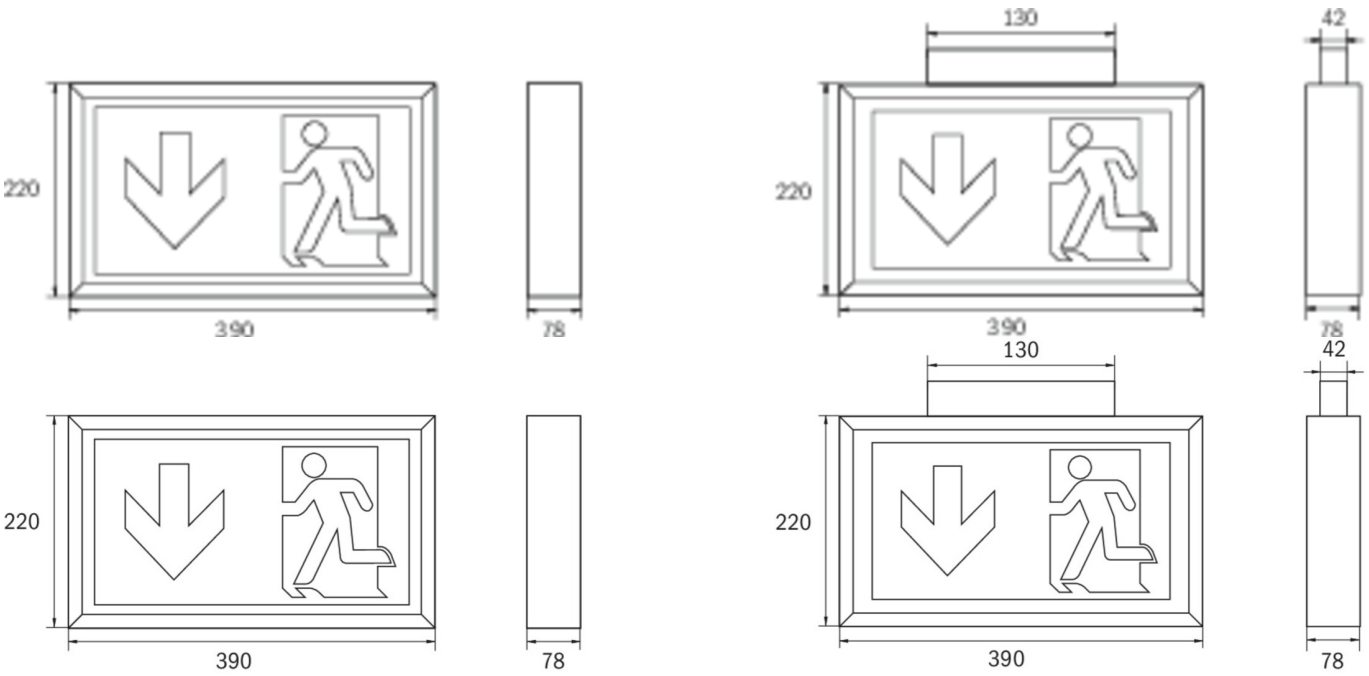

ACCESSORY LIST

DSA - Wire suspension

BALL2 - Wire mesh guard

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

As of: 03.11.2026 - Subject to technical changes and errors.