



**Art.-Nr: KLU018**  
**Exit sign Self-contained**  
**Universal, 8 h, 34 m, IP43, Polycarbonate, White, Set of**  
**pictograms**

Box-shaped plastic emergency exit sign luminaire for universal mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/KLU018](http://www.rp-group.com/en/item/KLU018)




## TECHNICAL DATA

|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Universal                   |
| Recognition distance   | 34 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP43                        |
| Impact resistance (IK) | ≥ 3                         |
| Certification          | WEEE, CE                    |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | ECB                         |
| Bridging time          | 8 h                         |
| Battery                | NIMH 9,6 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |
| Input frequency        | 50 / 60 Hz                  |
| Power max.             | 6,7 W                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power maintained                        | 4,5 W               |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 78 mm               |
| Width                                   | 390 mm              |
| Height                                  | 220 mm              |
| Weight                                  | 1.51                |
| Weight incl. packaging                  | 1.67                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 220 lm              |
| Luminous flux emergency                 | 160 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260123686079       |

## TECHNICAL DRAWING

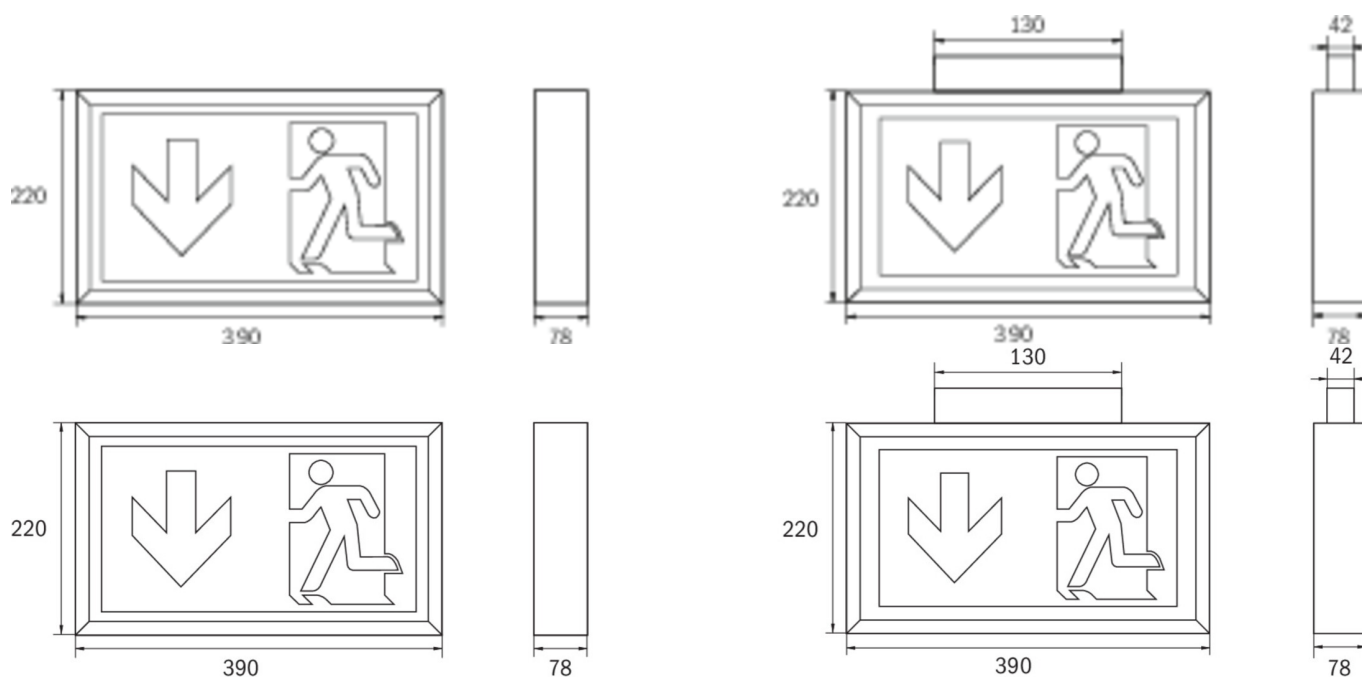



## ACCESSORY LIST

DSA - Wire suspension

BALL2 - Wire mesh guard

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

## RELATED PRODUCTS

| Art.-No. | Image                                                                              | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|----------|------------------------------------------------------------------------------------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KLU018SC |   | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KLU018WL |  | Wireless Professional (WL) | self contained | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 23.07.2026 - Subject to technical changes and errors.