RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: KLU019ML
# Exit sign Centralised power supply systems Universal, Central power supply (ML), CPS, 34 m, IP43, Polycarbonate, White, Set of pictograms



Box-shaped plastic emergency exit sign luminaire for universal mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

More information
www.rp-group.com/en/item/KLU019ML

## TECHNICAL DATA


| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 34 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP43 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

| | |
|---|---|
| Input voltage DC | 216 V |
| Power max. | 5,2 W |
| Power maintained | 5,2 W |
| Power non-maintained | 1,1 W |
| Ambient temperature maintained mode | -20 °C to 40 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Depth | 78 mm |
| Width | 390 mm |
| Height | 220 mm |
| Weight | 1.27 |
| Weight incl. packaging | 1.43 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 300 lm |
| Luminous flux emergency | 300 lm |
| Customs tariff number | 94056120 |
| GTIN | 4260349829472 |

## TECHNICAL DRAWING

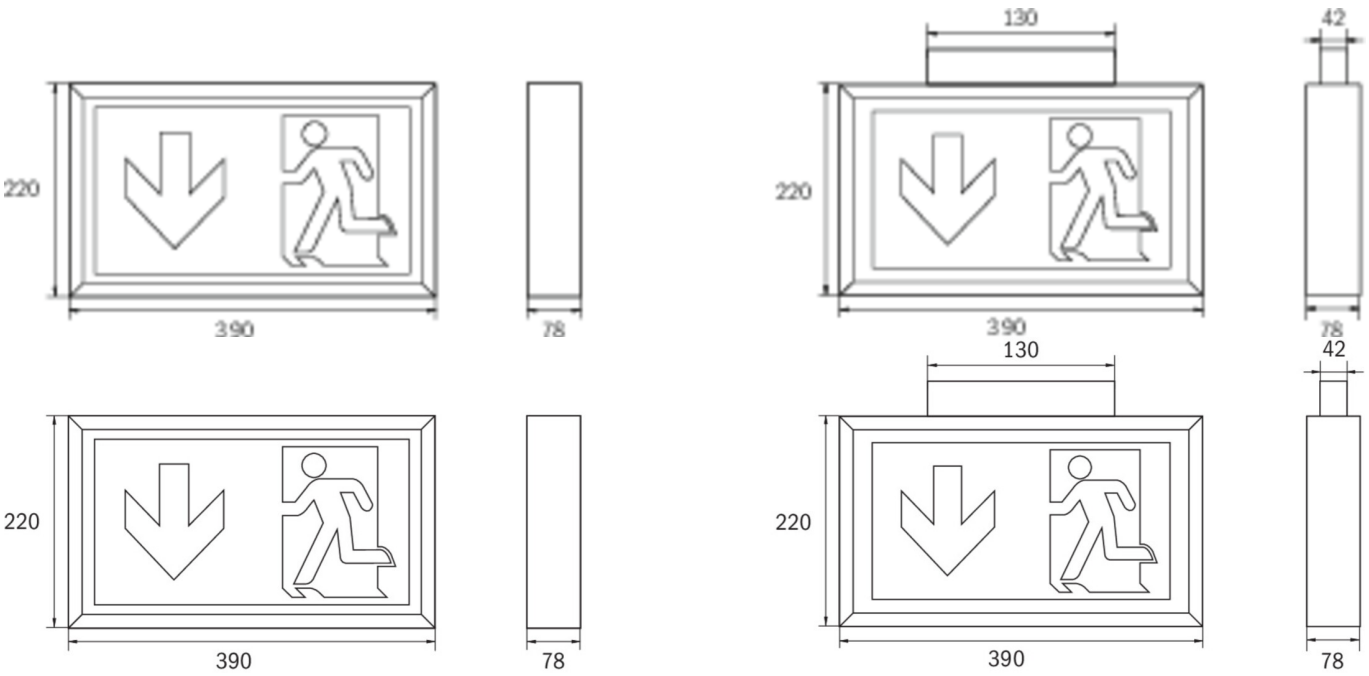


## ACCESSORY LIST

DSA - Wire suspension

BALL2 - Wire mesh guard

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

## RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|---|---|---|---|---|---|---|---|---|---|---|
| KLU519CC |  | CoreCompact 24 (CC) | Central power supply | RAL 9003 | €€ | Yes | low | Yes | | central |

As of: 06.11.2026 - Subject to technical changes and errors.