Art.-Nr: KDU019ML
Exit sign Centralised power supply systems Universal, Central power supply (ML), CPS, 22 m, IP43, Polycarbonate, White, Set of pictograms



Box-shaped plastic emergency exit sign luminaire for universal mounting. Suited to inscription on one or two sides.

Using the adapter supplied, the luminaire can also be mounted out from the wall. The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.


More information
www.rp-group.com/en/item/KDU019ML

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	Waste disposal, CE, Type-tested, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V

Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	4,2 W
Power maintained	3,1 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	70 mm
Width	260 mm
Height	155 mm
Weight	0.7
Weight incl. packaging	0.9
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux emergency	100 lm
Customs tariff number	94056120
GTIN	4260123681661

TECHNICAL DRAWING

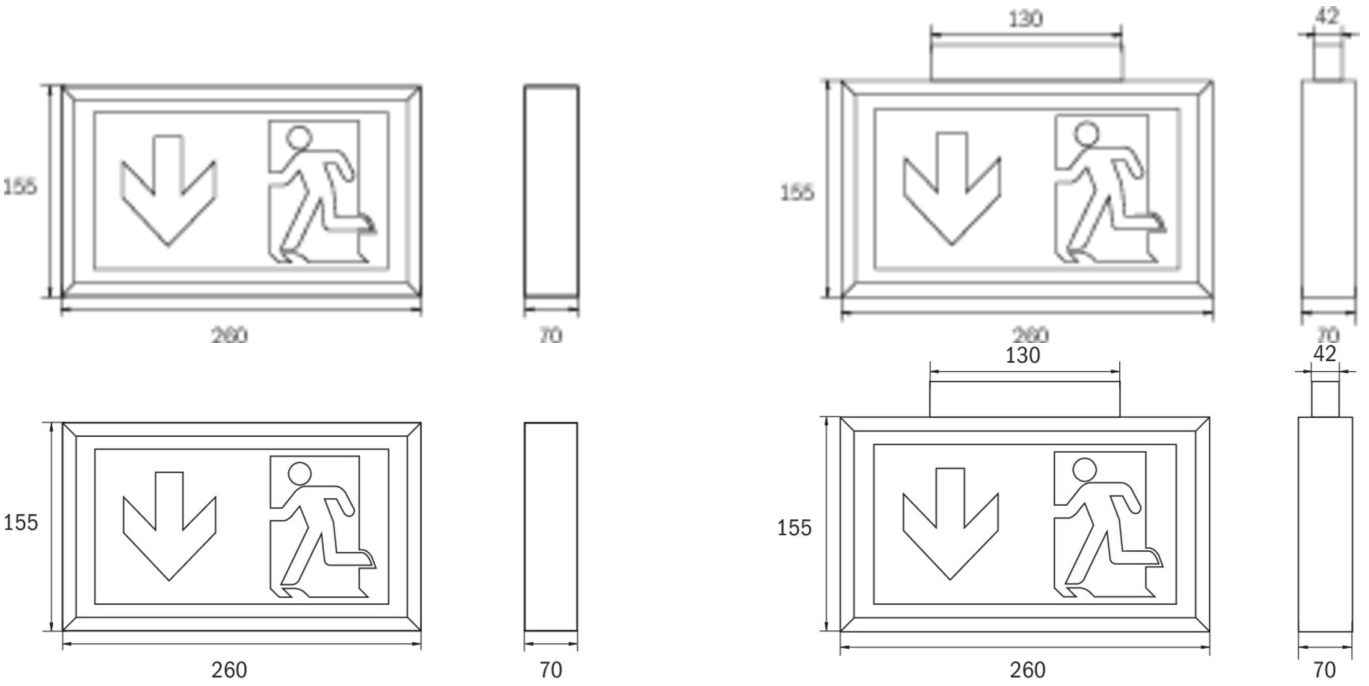

ACCESSORY LIST

DSA - Wire suspension

BALL1 - Wire mesh guard

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

BALLPLX-KD - Ball impact-resistant protective cover (PMMA) transparent for lights - KDU wall mounted

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KDU519CC		CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central

As of: 11.11.2026 - Subject to technical changes and errors.