RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: LSW019
Exit sign Centralised power supply systems Wall mounting, Without monitoring, CPS, 56 m, IP40, Aluminum, Anodised aluminium, Piktogram as reqired



Robust emergency exit sign luminaire made from slim aluminium profile, for wall mounting.

The additional downward light emission helps to illuminate emergency and escape routes.

The requested pictogram (arrow to the right, left, up or down) is supplied as standard.

CE


More information
www.rp-group.com/en/item/LSW019

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminum
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V

Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	62 mm
Width	614 mm
Height	334 mm
Weight	2.81
Weight incl. packaging	2.86
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
GTIN	4260123682767

TECHNICAL DRAWING

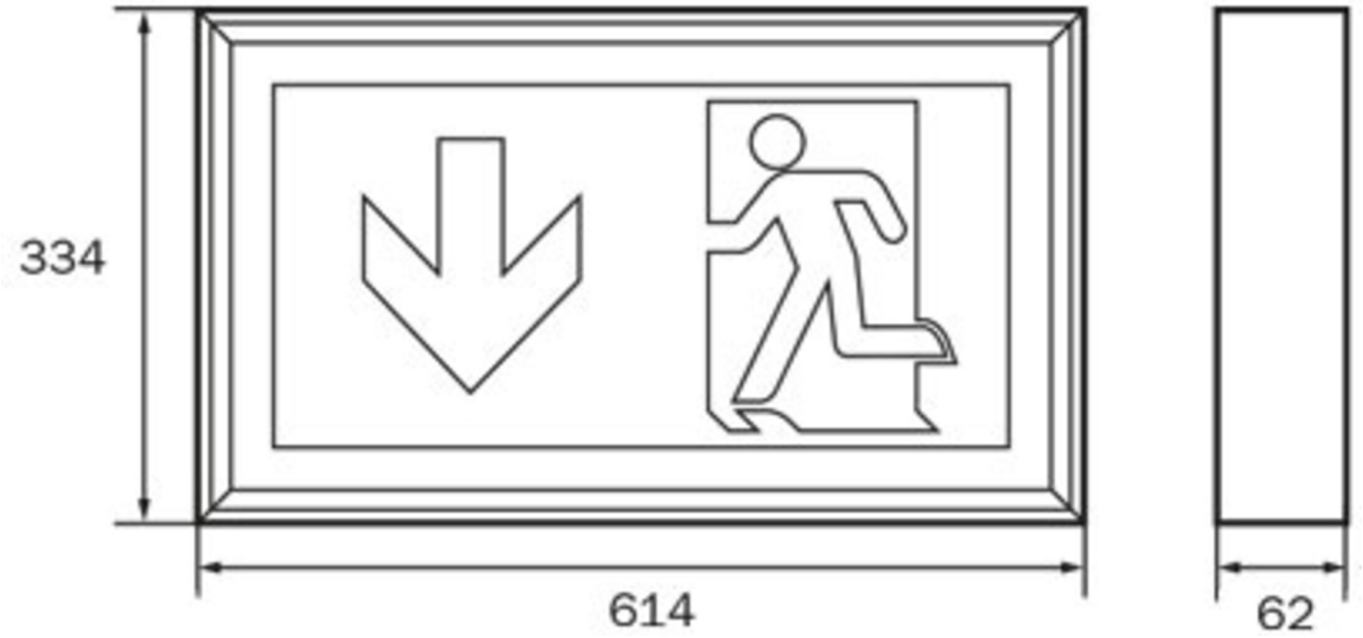

As of: 13.11.2026 - Subject to technical changes and errors.