RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: LSD019
Exit sign Centralised power supply systems Surface mounting, Without monitoring, CPS, 56 m, IP40, Aluminum, Anodised aluminium, Piktogram as reqired



Robust emergency exit sign luminaire made from slim aluminium profile, for ceiling mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

CE

More information
www.rp-group.com/en/item/LSD019

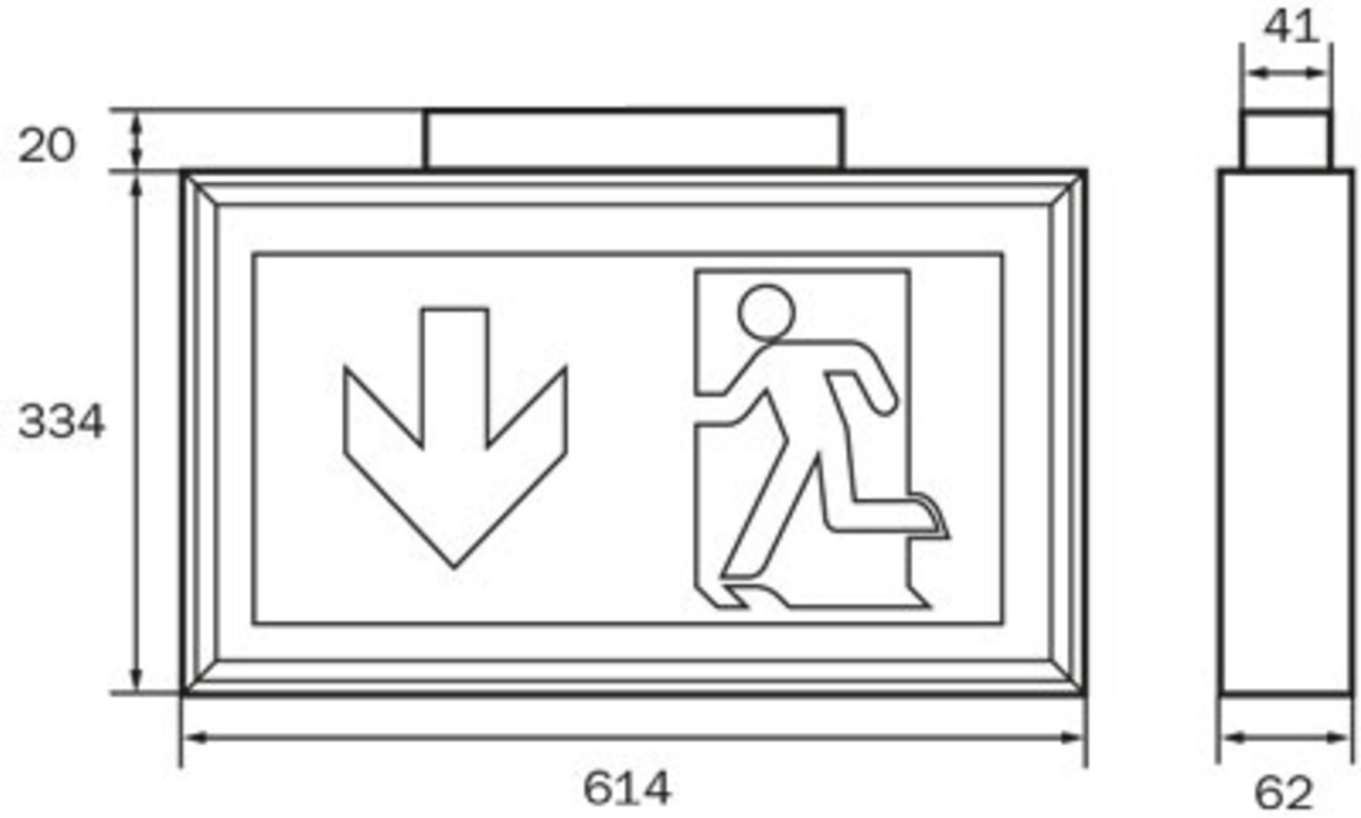
TECHNICAL DATA

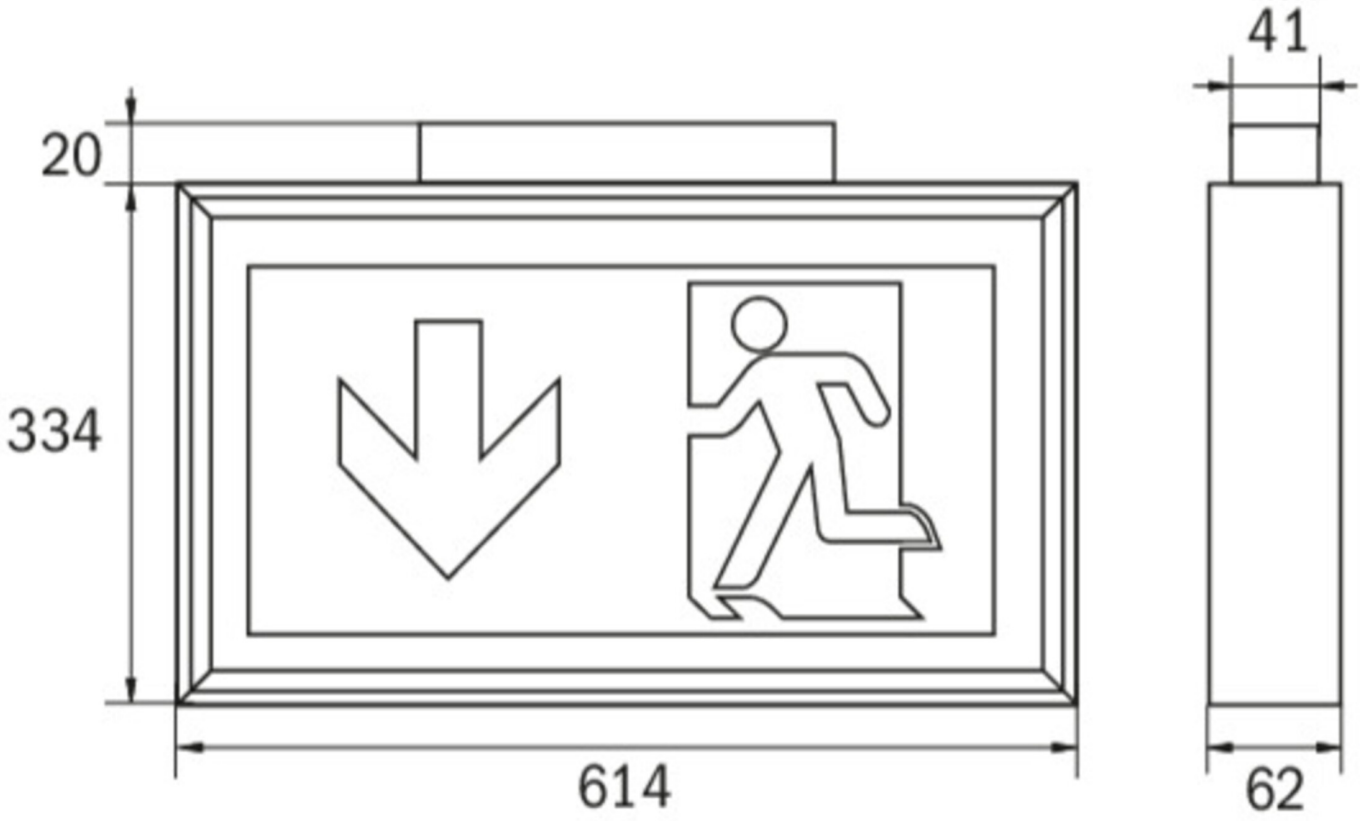
Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminum
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V

Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	62 mm
Width	614 mm
Height	334 mm
Weight	2.16
Weight incl. packaging	2.21
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
GTIN	4260123682866

RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

TECHNICAL DRAWING


41
20
334
614
62


41
20
334
614
62

ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

As of: 13.11.2026 - Subject to technical changes and errors.