



Art.-Nr: PFD019

Exit sign Centralised power supply systems

**Surface mounting, CPS, 24 m, IP65, Polycarbonate, White,
Set of pictograms**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left and down) is supplied as standard.



More information

www.rp-group.com/en/item/PFD019



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, ENEC, D-Sign, TÜV Rheinland Type approved
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,2 W



Power maintained	4,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.89
Weight incl. packaging	1.02
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
GTIN	4260123683788



TECHNICAL DRAWING

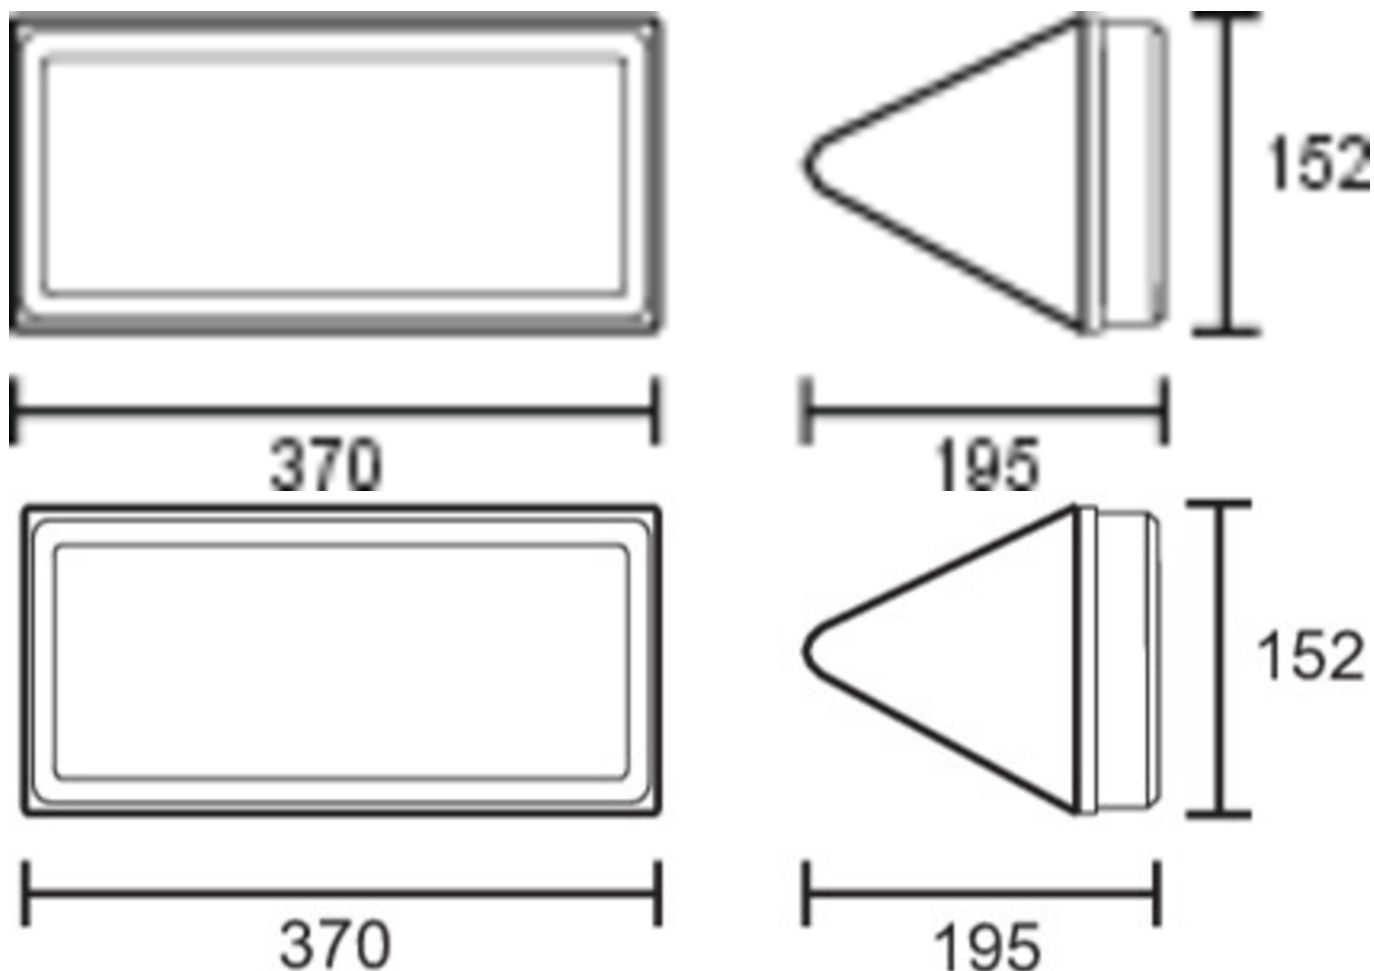

ACCESSORY LIST

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

DSA - Wire suspension

PFER - High-quality metal mounting frame for PF series emergency lights - 410 x 190 mm

As of: 04.08.2026 - Subject to technical changes and errors.