
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: WKD019
# Exit sign Centralised power supply systems Surface mounting, Without monitoring, CPS, 36 m, IP20, Metal, White, printed pictograms

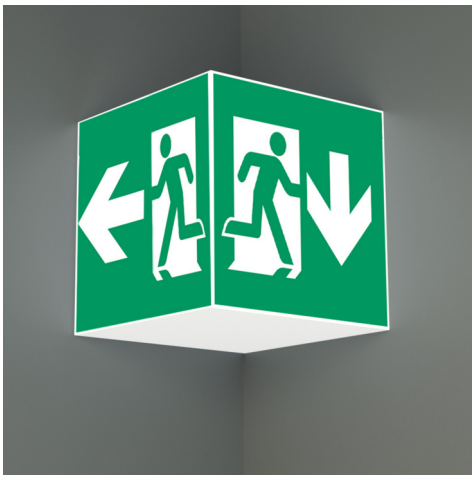

Square emergency exit sign cube luminaire for identifying escape and emergency routes. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

CE

More information
www.rp-group.com/en/item/WKD019


## TECHNICAL DATA


| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Surface mounting |
| Recognition distance | 36 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Metal |
| Housing color | White |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Without monitoring |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |

| | |
|---|---|
| Input voltage DC | 100-254 V |
| Power max. | 4,5 W |
| Power maintained | 4,5 W |
| Power non-maintained | 0 W |
| Ambient temperature maintained mode | -25 °C to 40 °C |
| Ambient temperature non-maintained mode | -25 °C to 40 °C |
| Depth | 195 mm |
| Width | 195 mm |
| Height | 195 mm |
| Weight | 0.77 |
| Weight incl. packaging | 0.91 |
| Connection cross-section | 1.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 250 lm |
| Luminous flux emergency | 250 lm |
| Customs tariff number | 94056120 |
| GTIN | 4260123686871 |


RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## TECHNICAL DRAWING

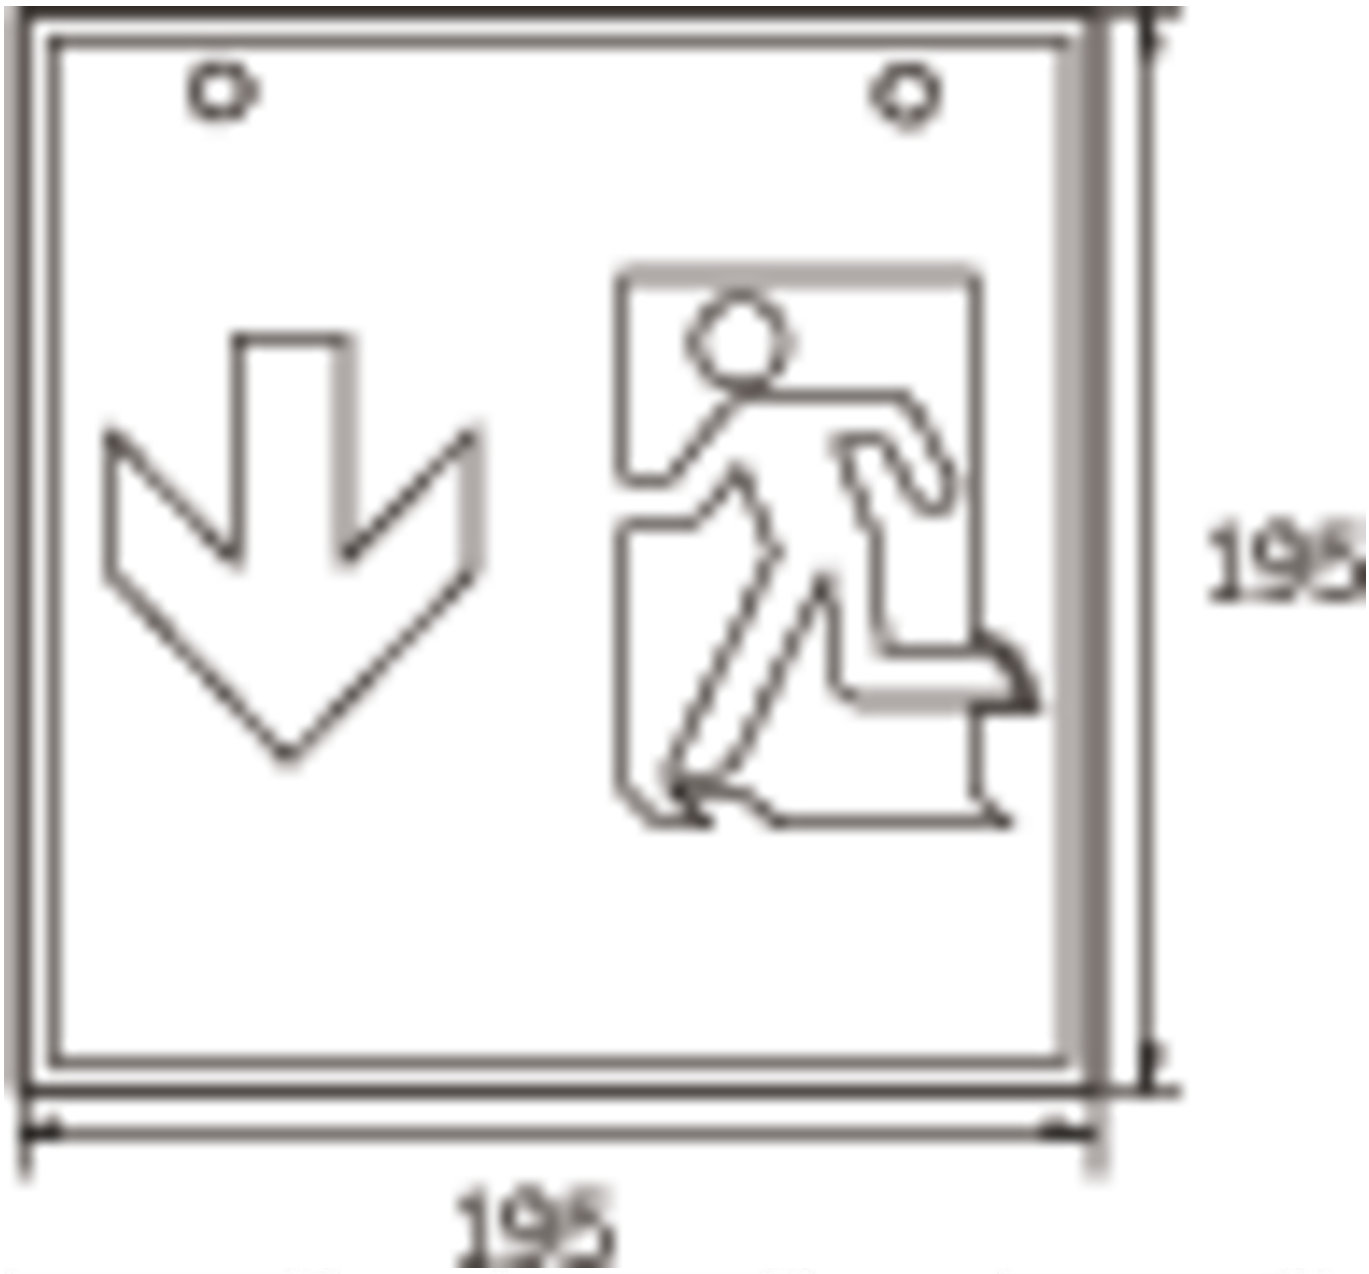


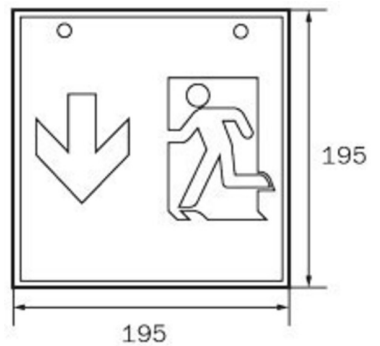

WK

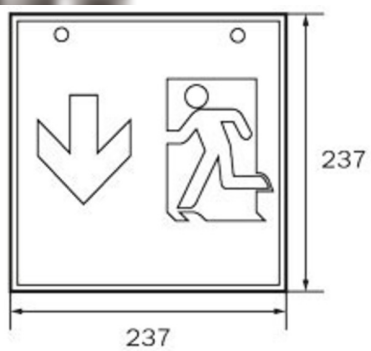



WG

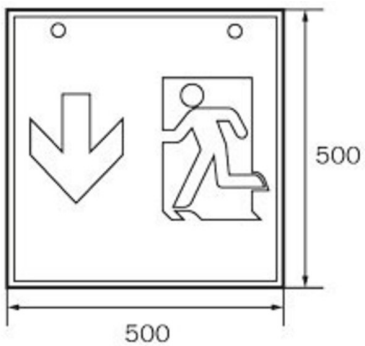


WX

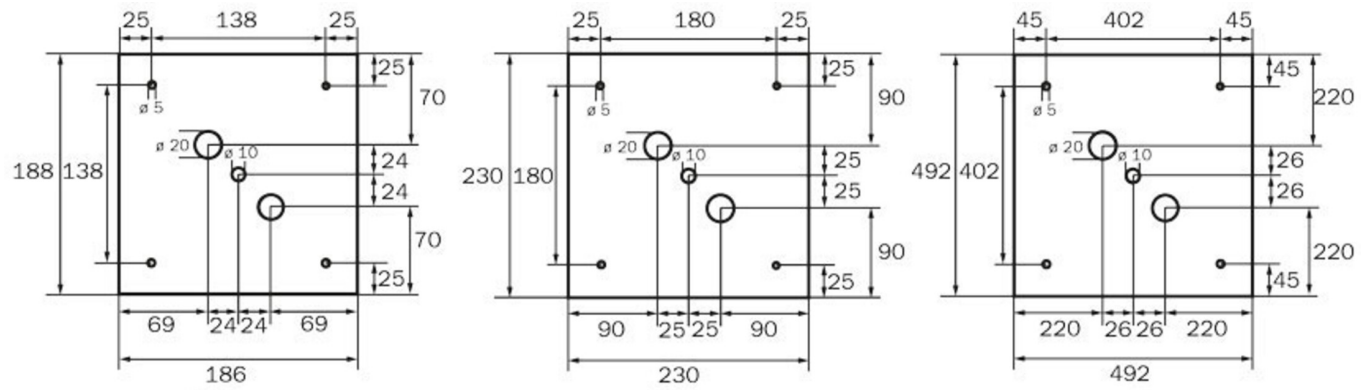
25
138
25
25
70
ø 5
ø 20
ø 10
24
24
70
25
188
138
69
24
24
69
186
WK
25
180
25
25
90
ø 5
ø 20
ø 10
25
25
90
25
230
180
90
25
25
90
230
WG
45
402
45
45
220
ø 5
ø 20
ø 10
26
26
220
45
492
402
220
26
26
220
492
WX

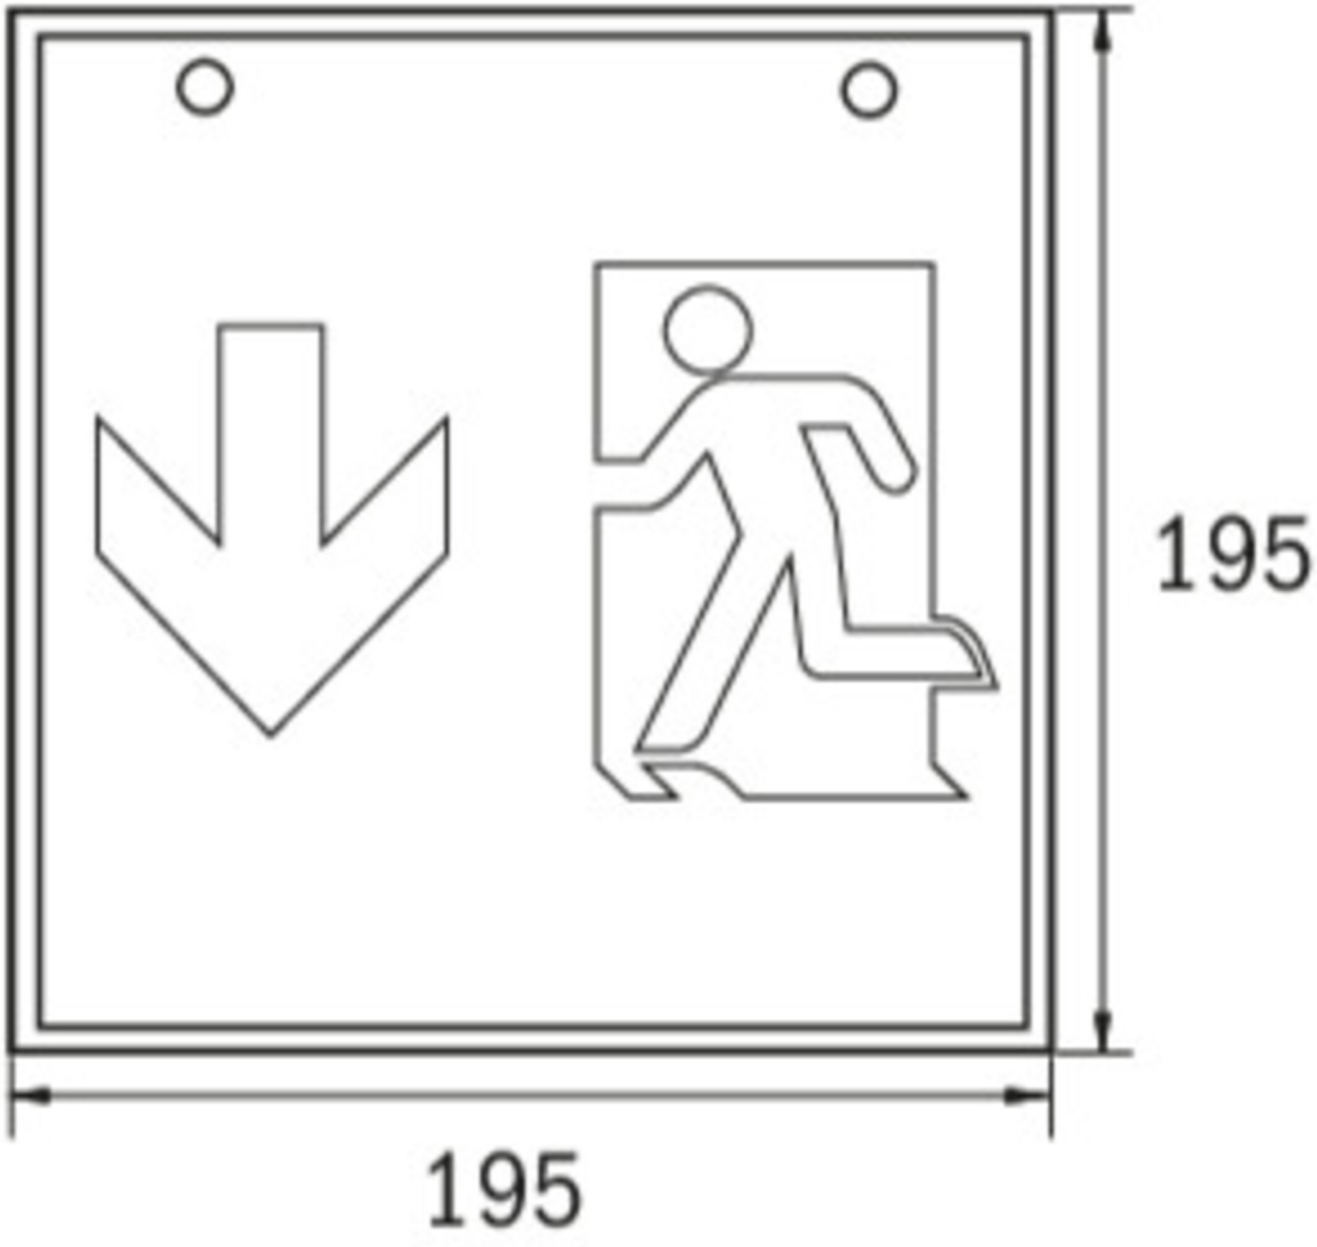
195
195

## ACCESSORY LIST

WKO - Set of chain eyelets for cube mounting (4 pieces)

1PV-EB - Pendulum

DSA-Y4M - Wire suspension

DSA-Y4M-APA - Wire suspension