RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: U6E019ML
Exit sign Centralised power supply systems Recessed wall mounting, Central power supply (ML), CPS, 22 m, IP40, Metal, White, Set of pictograms



Metal emergency exit sign luminaire integrated into the wall.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

More information
www.rp-group.com/en/item/U6E019ML

TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Power maintained	5,2 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	65 mm
Width	280 mm
Height	160 mm
Installation length	239 mm
Installation width	128 mm
Installation height	65 mm
Weight	1.08
Weight incl. packaging	1.35
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056180
GTIN	4260123687847

TECHNICAL DRAWING

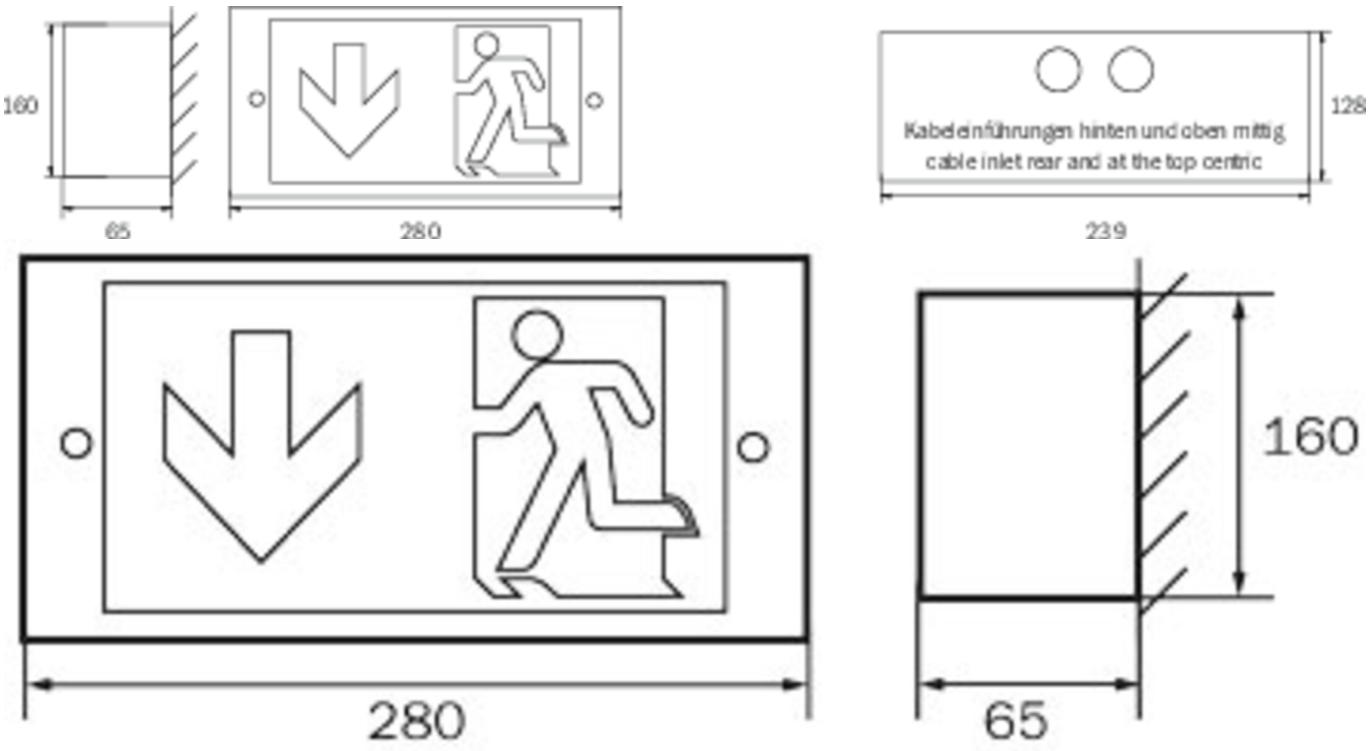

ACCESSORY LIST

U6BE - Robust steel mounting frame for U6 emergency luminaires in concrete installation

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring

As of: 14.11.2026 - Subject to technical changes and errors.