



**Art.-Nr: U8E019**  
**Exit sign Centralised power supply systems**  
**Recessed wall mounting, CPS, 34 m, IP40, Metal, White, Set of pictograms**

Metal emergency exit sign luminaire integrated into the wall.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/U8E019](http://www.rp-group.com/en/item/U8E019)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power maintained	4,5 W



Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	65 mm
Width	375 mm
Height	200 mm
Installation length	336 mm
Installation width	160 mm
Installation height	65 mm
Weight	1.34
Weight incl. packaging	1.52
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056180
GTIN	4260123687885



## TECHNICAL DRAWING

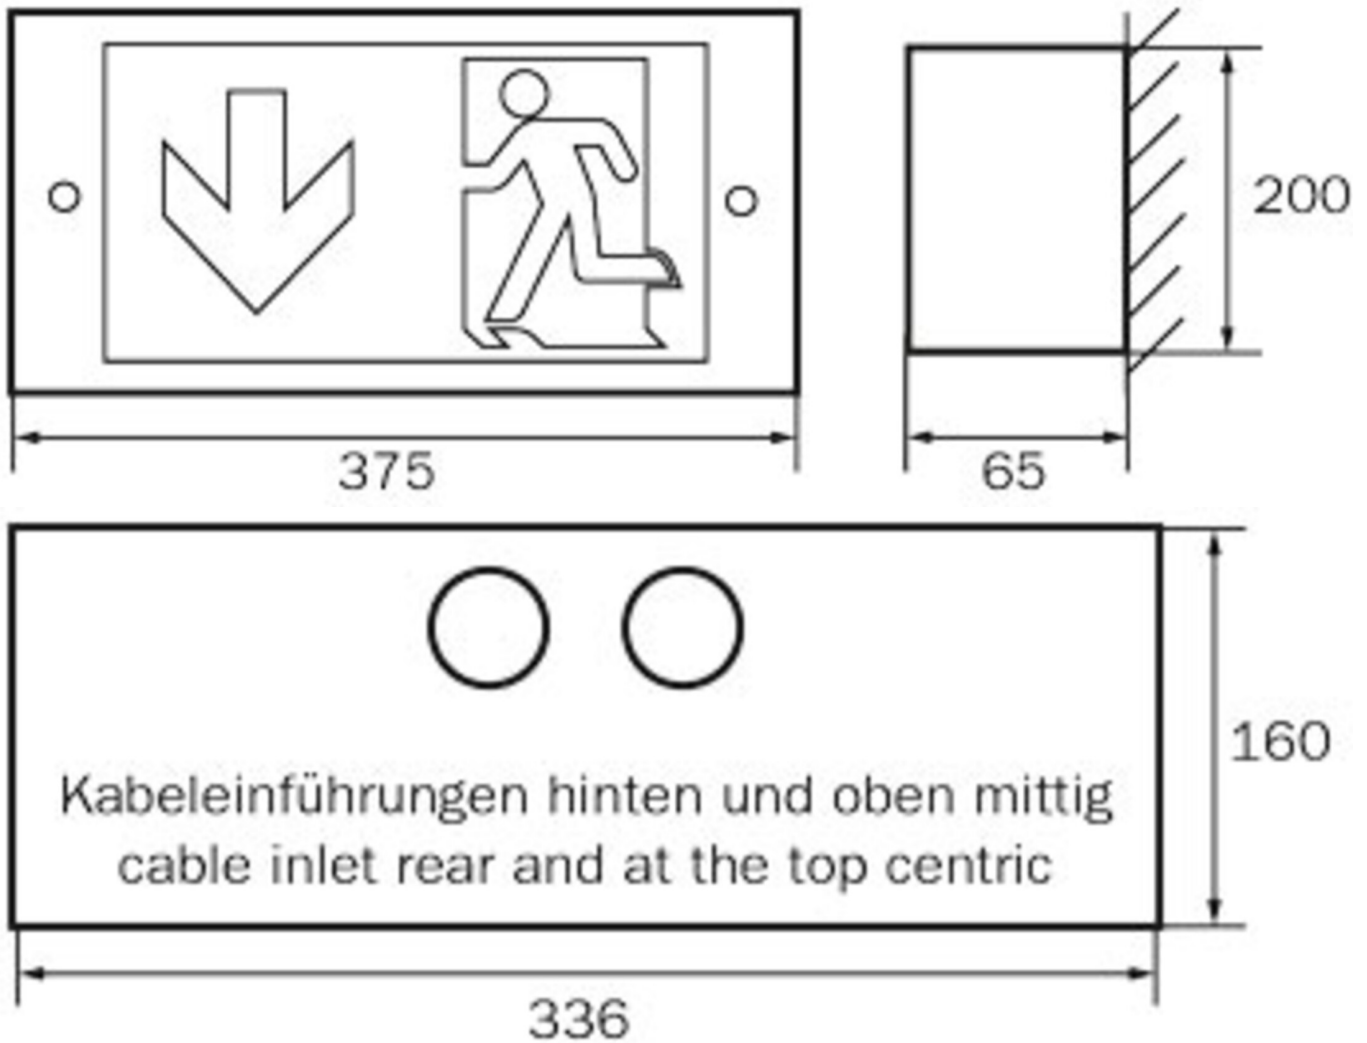

## ACCESSORY LIST

U8BE - Robust steel mounting frame for U8 emergency lighting

As of: 10.07.2026 - Subject to technical changes and errors.