



**Art.-Nr: KEU013WL**  
**Emergency light Self-contained**  
**Universal, 3 h, IP40, Polycarbonate, White, Flexiklick**

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information  
[www.rp-group.com/en/item/KEU013WL](http://www.rp-group.com/en/item/KEU013WL)




## TECHNICAL DATA

|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Emergency light             |
| Mounting               | Universal                   |
| Pictograph             | No                          |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP40                        |
| Impact resistance (IK) | ≥ 3                         |
| Certification          | WEEE, CE                    |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | Wireless Professional (WL)  |
| Bridging time          | 3 h                         |
| Battery                | NIMH 12 V/0,8 Ah            |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |
| Input frequency        | 50 / 60 Hz                  |
| Input voltage DC       | - V                         |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power max.                              | 7,5 W               |
| Power maintained                        | 7,5 W               |
| Power non-maintained                    | 3,6 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 332 mm              |
| Width                                   | 48 mm               |
| Height                                  | 72 mm               |
| Weight                                  | 0.67                |
| Weight incl. packaging                  | 0.71                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Clip                |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 150 lm              |
| Luminous flux emergency                 | 150 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260581719661       |

## TECHNICAL DRAWING

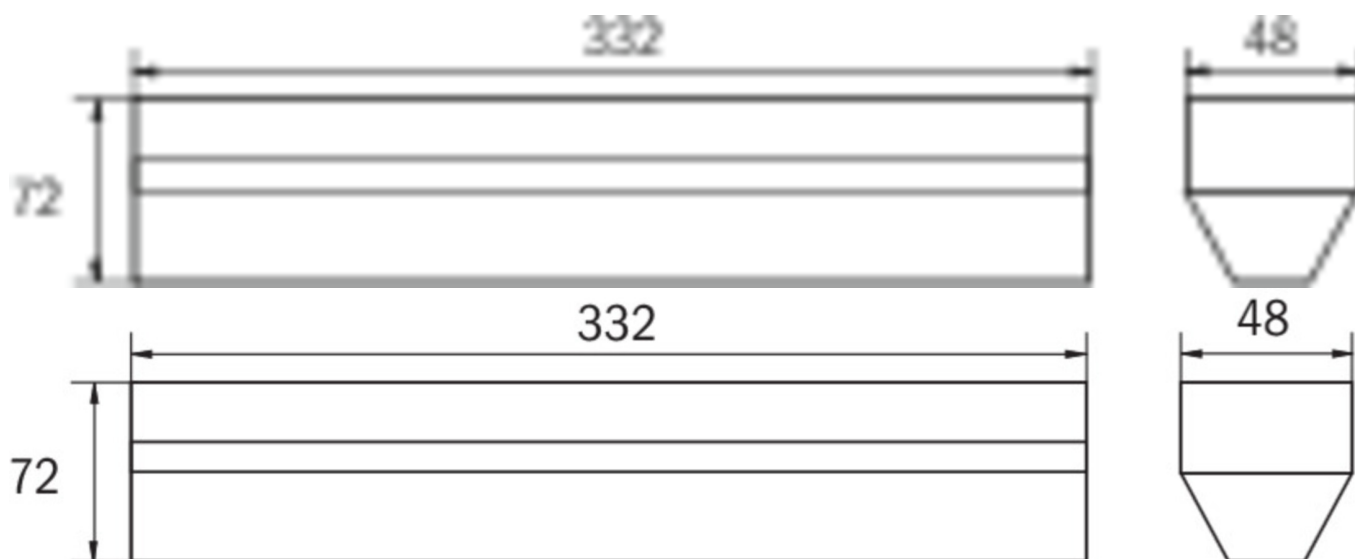



## ACCESSORY LIST

DSA - Wire suspension

KEE-EB - Installation frame for KE emergency lights - For discreet ceiling integration

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting

NIMH1208P - Battery

## RELATED PRODUCTS

| Art.-No. | Image                                                                               | Monitoring       | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|----------|-------------------------------------------------------------------------------------|------------------|----------------|----------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
| KEU013   |    | ECB              |                | RAL 9003 |            |               |                   |                    |                 |                             |
| KEU013BC |  | Bus control      |                | RAL 9003 |            |               |                   |                    |                 |                             |
| KEU013SC |  | SelfControl (SC) | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited       | itself                      |

As of: 26.07.2026 - Subject to technical changes and errors.