



Art.-Nr: QAW013SC-SI

**General light, Emergency light Self-contained
Universal, SelfControl (SC), 3 h, , IP20, Aluminium, Anodised
aluminium**

Round metal luminaire for general-purpose lighting and illuminating escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838. In mains operation, the luminaire is run at 26W / 2300lm LED.

The performance data stated relates to the in-built emergency luminaire.

Automatic monitoring of safety luminaire with SelfControl.



More information

www.rp-group.com/en/item/QAW013SC-SI




TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	6,1 W
Power maintained	4,5 W
Power non-maintained	0,35 W



Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	113 mm
Diameter	395 mm
Weight	0.86
Weight incl. packaging	1.18
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	220 lm
Customs tariff number	94056180
GTIN	4260659563448

TECHNICAL DRAWING

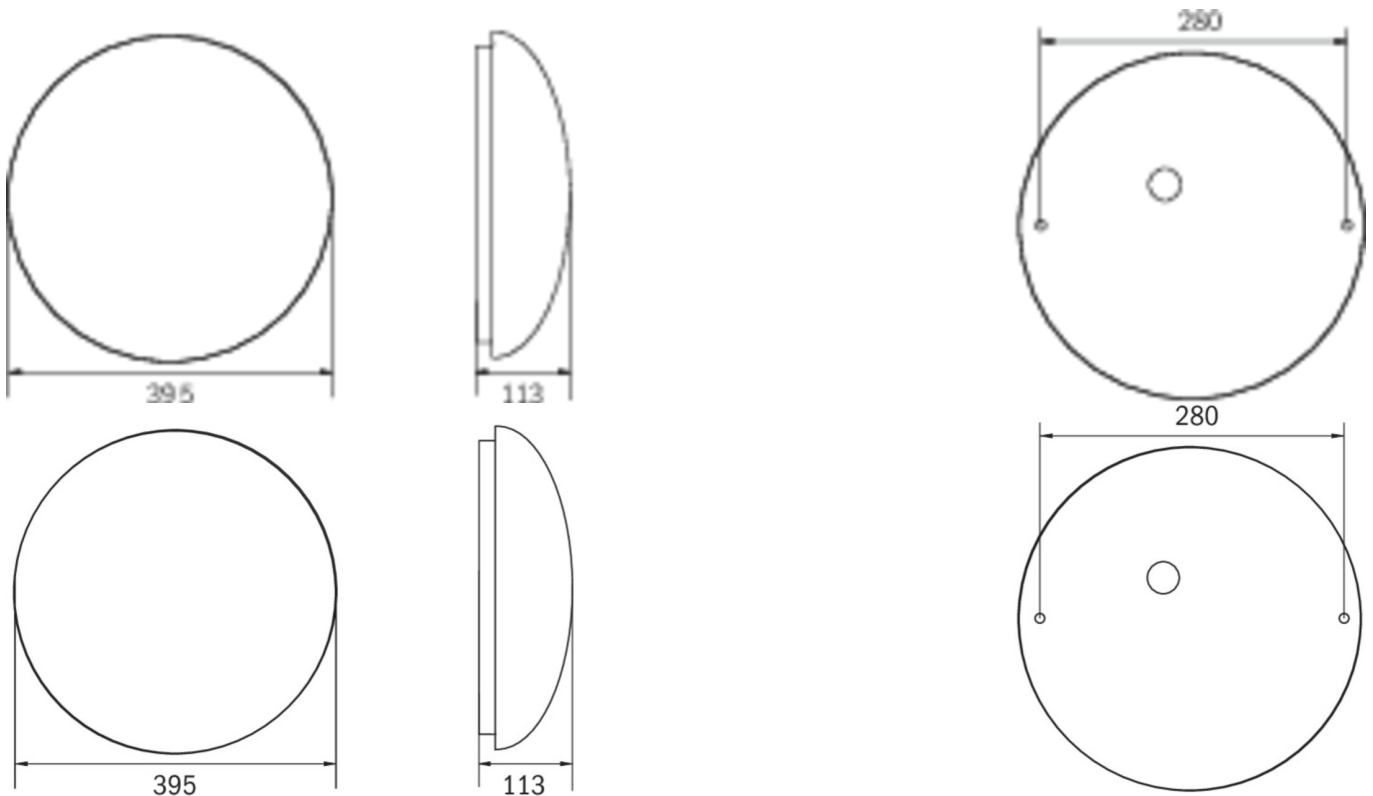

As of: 05.09.2025 - Subject to technical changes and errors.