
Art.-Nr: QAW009-SI-BM
General light, Emergency light Centralised power supply systems
Universal, Without monitoring, CPS, IP20, Aluminum, Anodised aluminium, HF motion detector

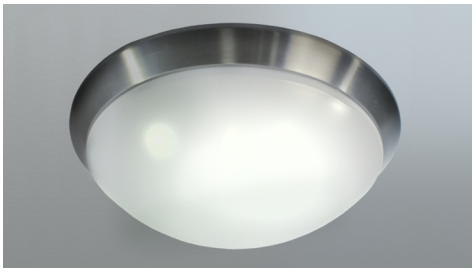

Round metal luminaire for general lighting and the lighting of escape and rescue route according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838.

This luminaire is designed for use with central battery systems. The LED-luminaire is operated with 26W, 1.600lm and light colour 4000 Kelvin. On mains failure the central battery system continues the supply of the emergency luminaire. On mains operation or failure the luminaire, supplied by the central battery system, operates at 100% luminous flux. This luminaire is equipped with a motion sensor.

The integrated motion detector **(BM)** reliably detects movements and automatically turns on the light in mains operation.

CE

More information
www.rp-group.com/en/item/QAW009-SI-BM

TECHNICAL DATA


Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminum
Housing color	Anodised aluminium
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	230 V



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Input frequency	50 Hz
Input voltage DC	216 V
Power max.	26 W
Power maintained	26 W
Power non-maintained	0 W
Ambient temperature maintained mode	-20 °C to 30 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Height	113 mm
Diameter	395 mm
Weight	2.15
Weight incl. packaging	2.47
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	2300 lm
Luminous flux emergency	2300 lm
EOF	1
Customs tariff number	94056180
GTIN	4260659569594

TECHNICAL DRAWING

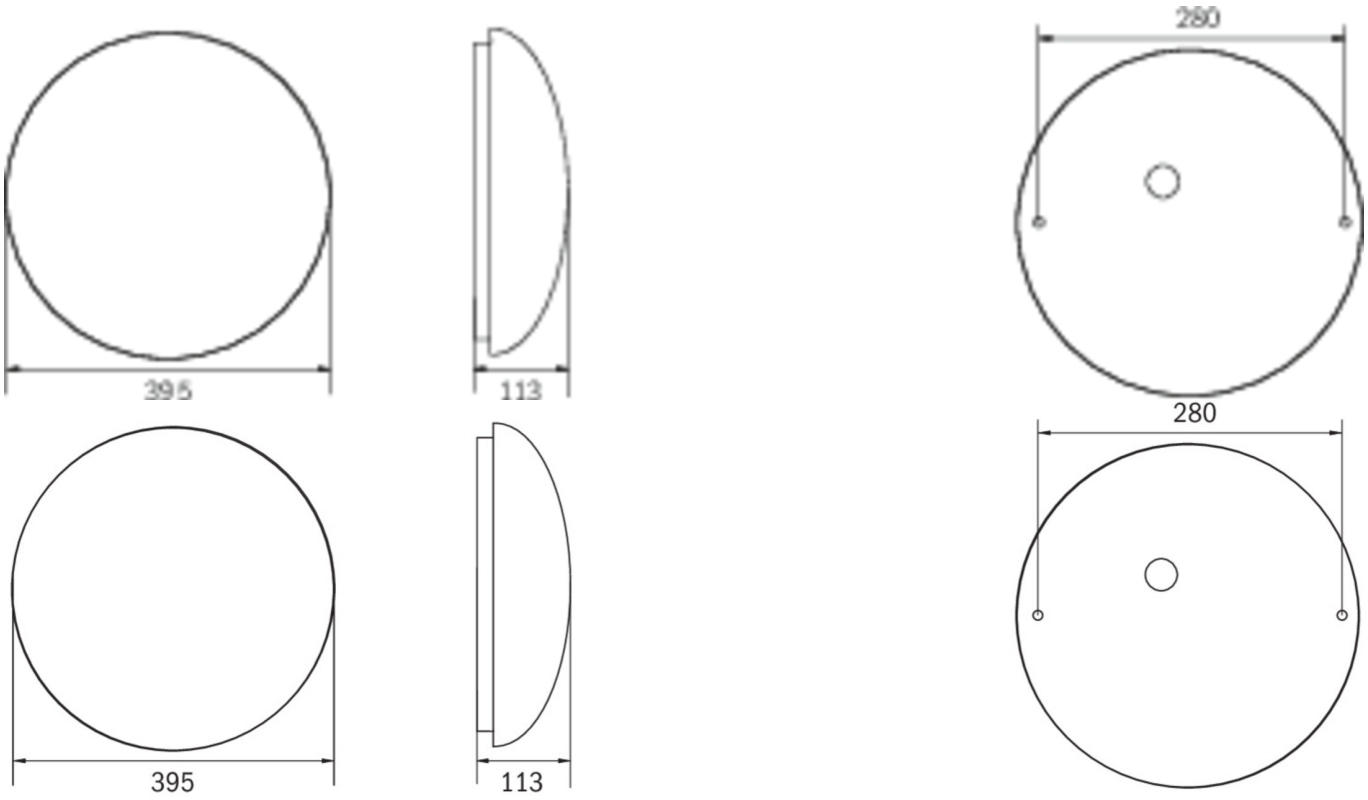

As of: 15.11.2026 - Subject to technical changes and errors.