



**Art.-Nr: AMR009**  
**Exit sign Centralised power supply systems**  
**Recessed wall mounting, CPS, 22 m, IP40, Zinc die-cast,**  
**White, Set of pictograms**

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/AMR009](http://www.rp-group.com/en/item/AMR009)



## TECHNICAL DATA


| Luminaire type         | Exit sign                        |
|------------------------|----------------------------------|
| Mounting               | Recessed wall mounting           |
| Recognition distance   | 22 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | White                            |
| Protection type (IP)   | IP40                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Without monitoring               |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Permanent circuit                |
| Input voltage AC       | 230 V                            |
| Input frequency        | 50 / 60 Hz                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input voltage DC                        | 100-254 V           |
| Power max.                              | 4,5 W               |
| Power maintained                        | 4,5 W               |
| Power non-maintained                    | 0 W                 |
| Ambient temperature maintained mode     | -25 °C to 40 °C     |
| Ambient temperature non-maintained mode | -25 °C to 40 °C     |
| Depth                                   | 79 mm               |
| Width                                   | 236 mm              |
| Height                                  | 151 mm              |
| Installation length                     | 176 mm              |
| Installation width                      | 68 mm               |
| Installation height                     | 40 mm               |
| Weight                                  | 0.99                |
| Weight incl. packaging                  | 1.35                |
| Connection cross-section                | 1.5 mm <sup>2</sup> |
| Switching input                         | No                  |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Dimming function                        | No                  |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260581714567       |



## TECHNICAL DRAWING

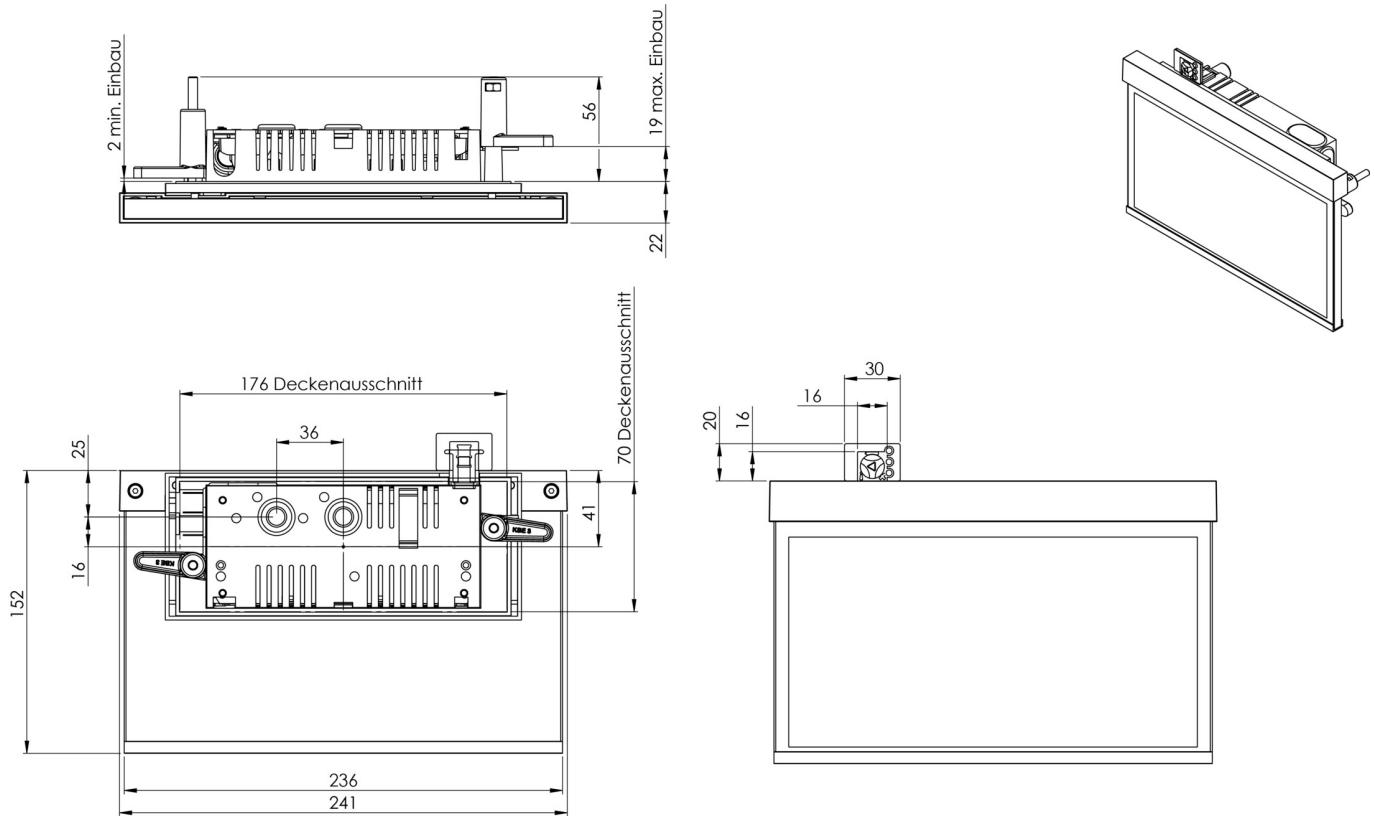

## ACCESSORY LIST

BALLPLX-AM - Ball impact-resistant protective cover (PMMA) for lights - IK10 | Transparent

AM-XBE - Flush-mounted box

As of: 02.09.2026 - Subject to technical changes and errors.