



**Art.-Nr: AMC009ML**

**Exit sign Centralised power supply systems**

**Ceiling mounting, CPS, 22 m, IP20, Zinc die-cast, White, Set of pictograms**

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/AMC009ML](http://www.rp-group.com/en/item/AMC009ML)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign                        |
| Mounting               | Ceiling mounting                 |
| Recognition distance   | 22 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | White                            |
| Protection type (IP)   | IP20                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | single luminaire switching       |
| Input voltage AC       | 230 V                            |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Input voltage DC                        | 216 V               |
| Power max.                              | 3,5 W               |
| Power maintained                        | 3,5 W               |
| Power non-maintained                    | 1,1 W               |
| Ambient temperature maintained mode     | -20 °C to 40 °C     |
| Ambient temperature non-maintained mode | -20 °C to 40 °C     |
| Depth                                   | 80 mm               |
| Width                                   | 236 mm              |
| Height                                  | 214 mm              |
| Installation length                     | 176 mm              |
| Installation width                      | 68 mm               |
| Installation height                     | 40 mm               |
| Weight                                  | 1.1                 |
| Weight incl. packaging                  | 1.46                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Dimming function                        | Yes                 |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260349828314       |



## TECHNICAL DRAWING

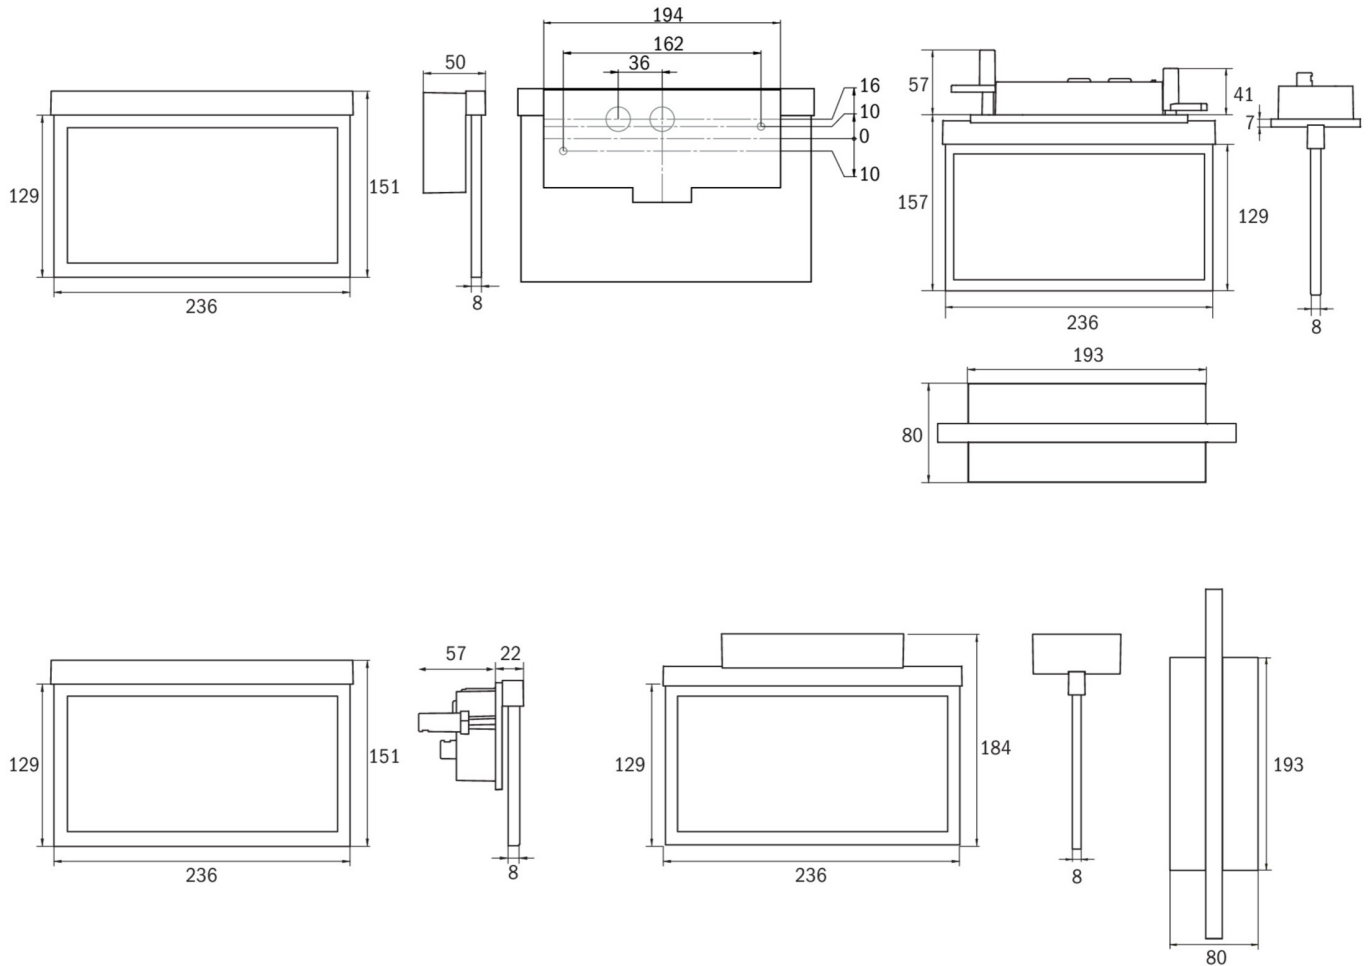

## ACCESSORY LIST

AM-XBE - Flush-mounted box



## RELATED PRODUCTS

| Art.-No.    | Image | Monitoring                | Supply               | Color     | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-------------|-------|---------------------------|----------------------|-----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AMC009ML-AZ |       | Central power supply (ML) | Central power supply | RAL 7016  | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| AMC009ML-E  |       | Central power supply (ML) | Central power supply | Edelstahl | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| AMC509CC    |       | CoreCompact 24 (CC)       | Central power supply | RAL 9003  | €€         | Yes           | low               | Yes                |                  | central                     |
| AMC509CC-AZ |       | CoreCompact 24 (CC)       | Central power supply | RAL 7016  | €€         | Yes           | low               | Yes                |                  | central                     |
| AMC509CC-E  |       | CoreCompact 24 (CC)       | Central power supply | Edelstahl | €€         | Yes           | low               | Yes                |                  | central                     |

As of: 02.09.2026 - Subject to technical changes and errors.