



**Art.-Nr: KCW011WL**  
**Exit sign, Emergency light Self-contained**  
**Wall mounting, 1 h, IP54, Polycarbonate, White, Set of**  
**pictograms**

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/KCW011WL](http://www.rp-group.com/en/item/KCW011WL)



## TECHNICAL DATA


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign, Emergency light  |
| Mounting               | Wall mounting               |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP54                        |
| Impact resistance (IK) | 6                           |
| Certification          | WEEE, CE                    |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | Wireless Professional (WL)  |
| Bridging time          | 1 h                         |
| Battery                | NIMH 12 V/0,8 Ah            |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Input voltage DC                        | - V                 |
| Power max.                              | 7,5 W               |
| Power maintained                        | 7,5 W               |
| Power non-maintained                    | 3,6 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 60 mm               |
| Width                                   | 340 mm              |
| Height                                  | 170 mm              |
| Weight                                  | 1                   |
| Weight incl. packaging                  | 1.09                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Clip                |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 150 lm              |
| Luminous flux emergency                 | 150 lm              |
| EOF                                     | 1                   |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260349824675       |



## TECHNICAL DRAWING

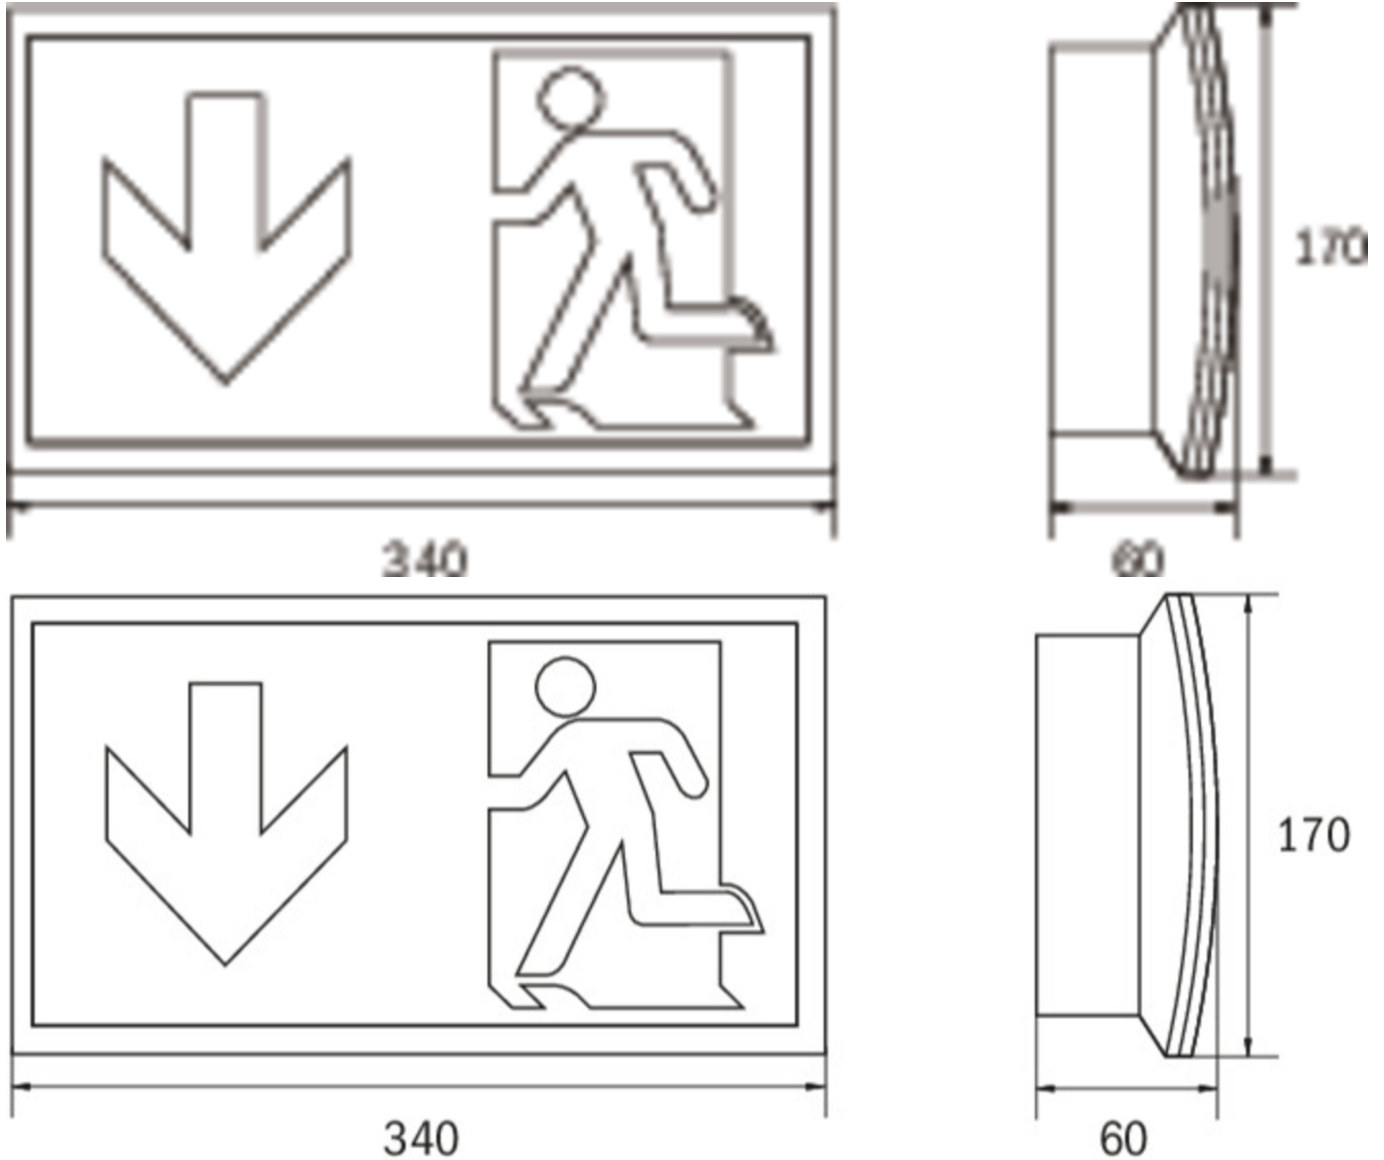

## ACCESSORY LIST

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 - Professional electrical engineering module for critical safety applications

KCER - Mounting frame

KCWFH - Wall holder

NIMH1208P - Battery

As of: 21.07.2026 - Subject to technical changes and errors.