RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: AMWA009-AZ
# Exit sign Centralised power supply systems Wall construction flag, Without monitoring, CPS, 22 m, IP40, Zinc die-cast, Anthracite, Set of pictograms



Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE


More information
www.rp-group.com/en/item/AMWA009-AZ

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Wall construction flag |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Without monitoring |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Permanent circuit |
| Input voltage AC | 230 V |

| | |
|---|---|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 100-254 V |
| Power max. | 4,5 W |
| Power maintained | 4,5 W |
| Power non-maintained | 0 W |
| Ambient temperature maintained mode | -25 °C to 40 °C |
| Ambient temperature non-maintained mode | -25 °C to 40 °C |
| Depth | 80 mm |
| Width | 334 mm |
| Height | 196 mm |
| Weight | 1.45 |
| Weight incl. packaging | 1.81 |
| Connection cross-section | 1.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Customs tariff number | 94056180 |
| GTIN | 4260581714697 |

## TECHNICAL DRAWING

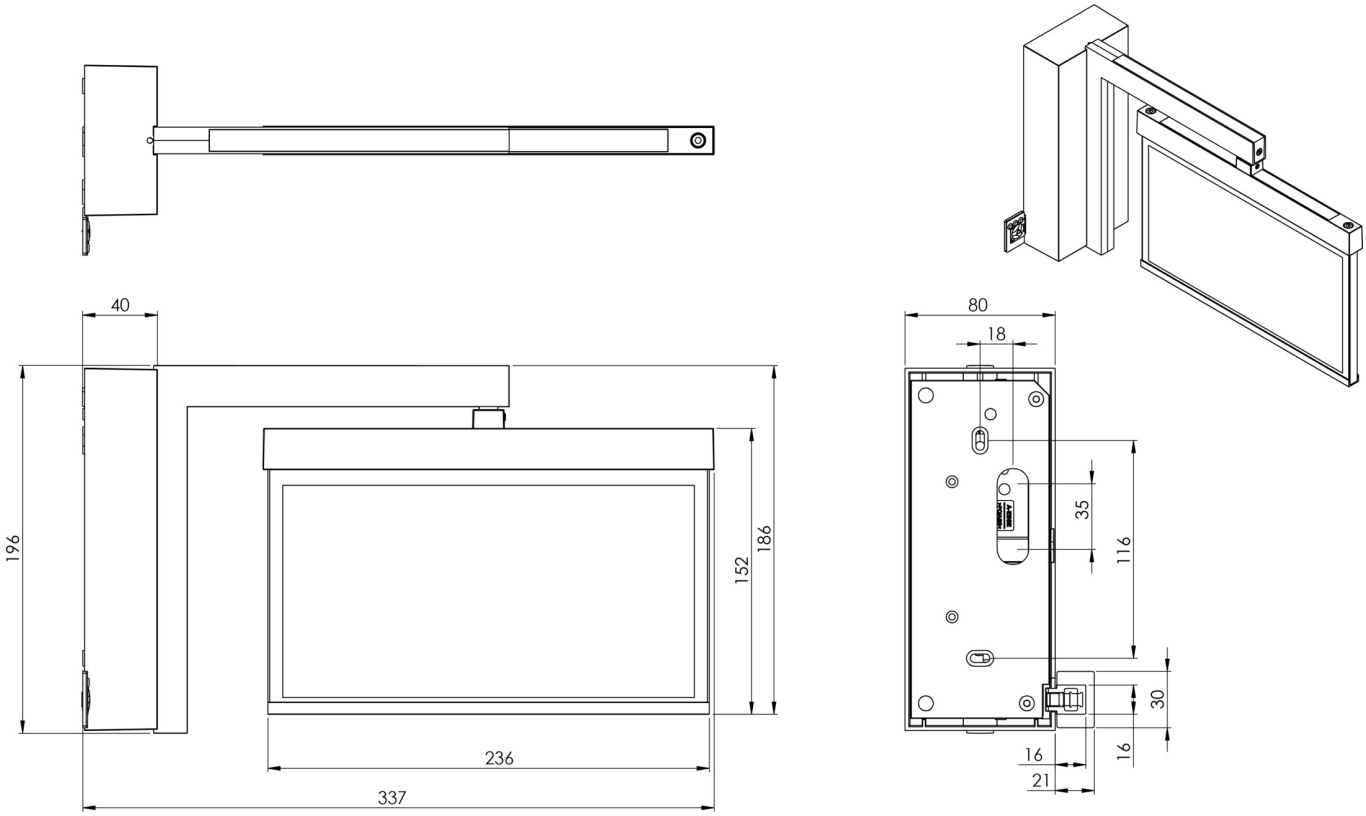


## ACCESSORY LIST

AM-X-APA - Surface-mounted/intermediate housing

As of: 02.11.2026 - Subject to technical changes and errors.