Art.-Nr: AMWT009ML-AZ
Exit sign, Emergency light Centralised power supply systems Wall mounting, Central power supply (ML), CPS, 22 m, IP40, Zinc die-cast, Anthracite, Set of pictograms



Modern zinc die-cast emergency exit sign/safety luminaire for wall mounting and for identifying emergency and escape routes. In the event of power failure, duo technology means that the escape and emergency routes are illuminated by an additional LED.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE


More information
www.rp-group.com/en/item/AMWT009ML-AZ

TECHNICAL DATA

Luminaire type	Exit sign, Emergency light
Mounting	Wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching

Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	4,2 W
Power maintained	3,1 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	51 mm
Width	241 mm
Height	167 mm
Weight	1.25
Weight incl. packaging	1.61
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux emergency	100 lm
EOF	N/A
Customs tariff number	94056180
GTIN	4260581714758

TECHNICAL DRAWING

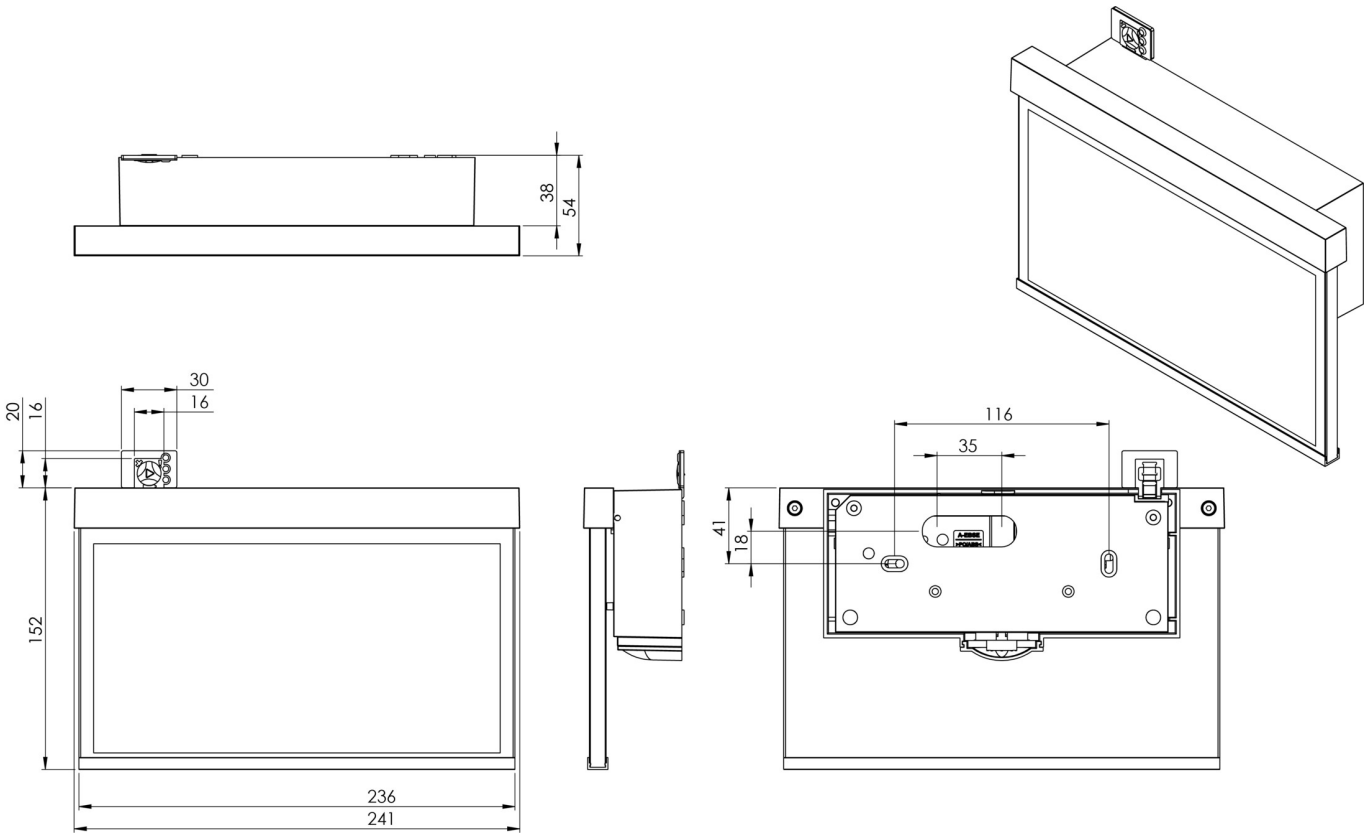

ACCESSORY LIST

BALLPLX-AM - Ball impact-resistant protective cover (PMMA) transparent for lights - AMW

AM-X-APA - Surface-mounted/intermediate housing

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
AMWT009ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
AMWT009ML-E		Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central

As of: 02.11.2026 - Subject to technical changes and errors.