RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: AXR009-AZ
Exit sign Centralised power supply systems Recessed wall mounting, Without monitoring, CPS, 30 m, IP40, Zinc die-cast, Anthracite, Set of pictograms



Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

More information
www.rp-group.com/en/item/AXR009-AZ

TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Input voltage DC	100-254 V
Power max.	3,3 W
Power maintained	3,3 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	80 mm
Width	312 mm
Height	238 mm
Installation length	176 mm
Installation width	68 mm
Installation height	40 mm
Weight	1.35
Weight incl. packaging	1.84
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
GTIN	4260581716165

TECHNICAL DRAWING

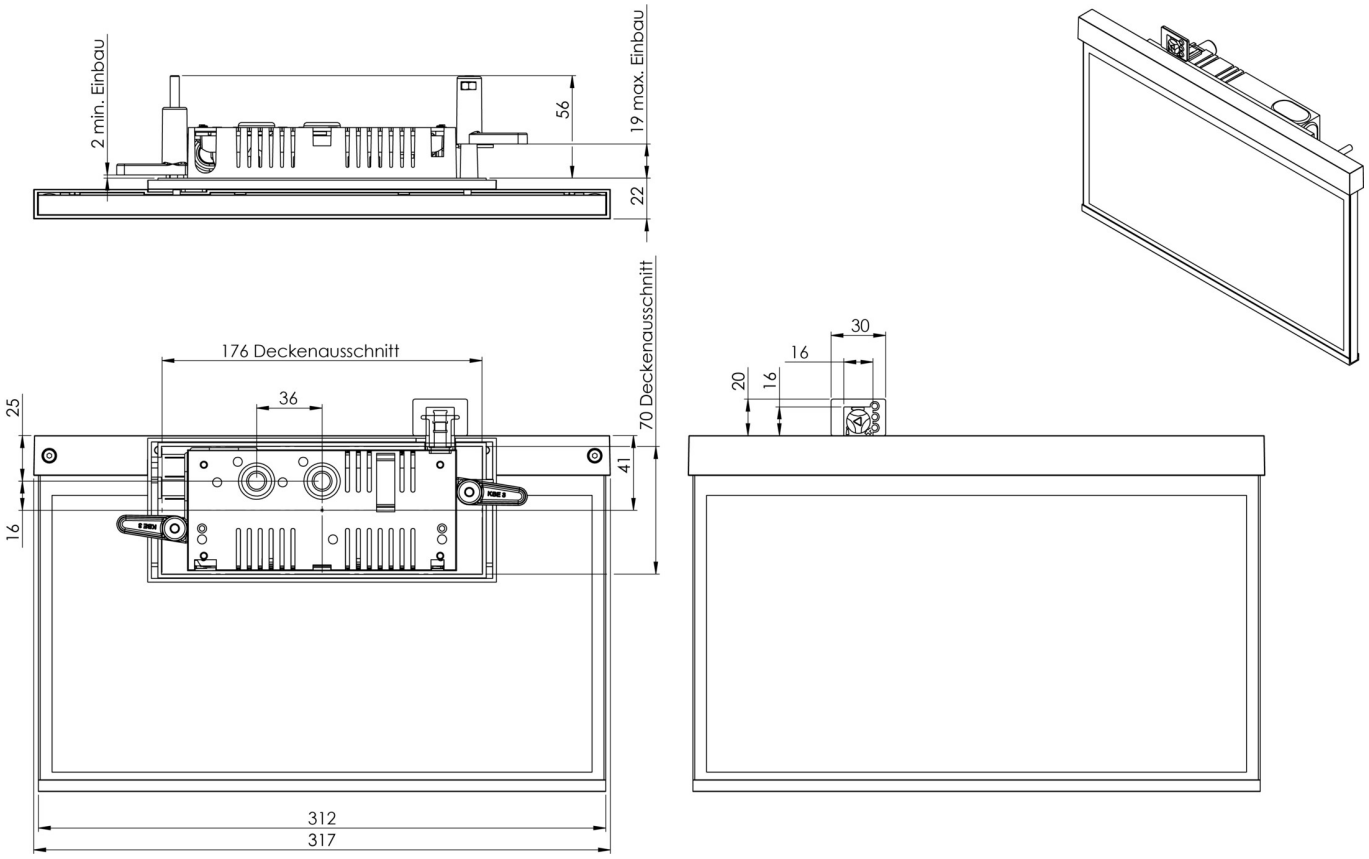

ACCESSORY LIST

BALLPLX-AX - Ball impact-resistant protective cover (PMMA) transparent for lights - AXW

AM-XBE - Flush-mounted box

As of: 02.11.2026 - Subject to technical changes and errors.