



**Art.-Nr: AXCT009ML-E**

**Exit sign, Emergency light Centralised power supply systems  
Ceiling mounting, CPS, 30 m, IP20, Zinc die-cast, Stainless  
steel, Set of pictograms**

Modern zinc die-cast emergency exit sign/safety luminaire with wire suspension for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides. In the event of power failure, duo technology means that the escape and emergency routes are illuminated by an additional LED.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/AXCT009ML-E](http://www.rp-group.com/en/item/AXCT009ML-E)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign, Emergency light       |
| Mounting               | Ceiling mounting                 |
| Recognition distance   | 30 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Stainless steel                  |
| Protection type (IP)   | IP20                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |



|                                         |                            |
|-----------------------------------------|----------------------------|
| Operating mode                          | single luminaire switching |
| Input voltage AC                        | 230 V                      |
| Input frequency                         | 50 / 60 Hz                 |
| Input voltage DC                        | 216 V                      |
| Power max.                              | 4,9 W                      |
| Power maintained                        | 3,4 W                      |
| Power non-maintained                    | 1,1 W                      |
| Ambient temperature maintained mode     | -20 °C to 40 °C            |
| Ambient temperature non-maintained mode | -20 °C to 40 °C            |
| Depth                                   | 80 mm                      |
| Width                                   | 312 mm                     |
| Height                                  | 181 mm                     |
| Installation length                     | 176 mm                     |
| Installation width                      | 68 mm                      |
| Installation height                     | 40 mm                      |
| Weight                                  | 1.9                        |
| Weight incl. packaging                  | 2.39                       |
| Connection cross-section                | 2.5 mm <sup>2</sup>        |
| Switching input                         | Yes                        |
| Emergency light blocking                | No                         |
| Battery connection                      | No                         |
| Dimming function                        | Yes                        |
| Luminous flux emergency                 | 100 lm                     |
| EOF                                     | N/A                        |
| Customs tariff number                   | 94056180                   |
| GTIN                                    | 4260581715298              |



## TECHNICAL DRAWING

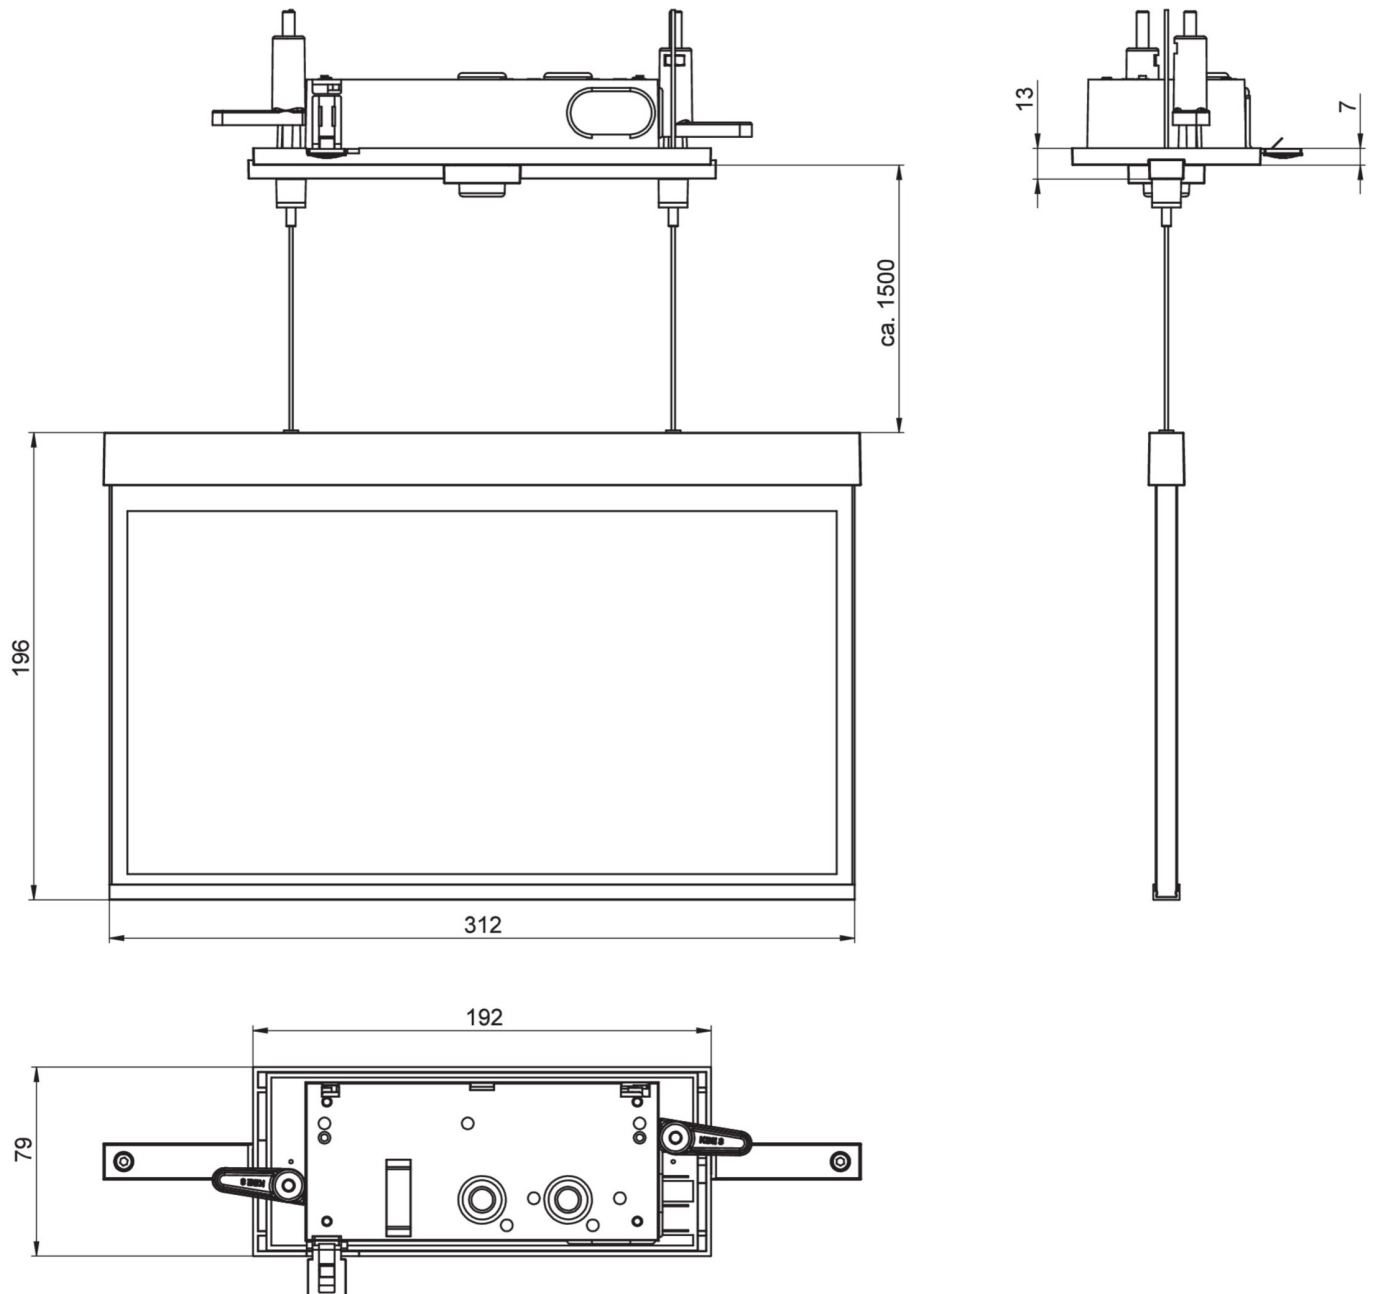

## ACCESSORY LIST

AM-XBE - Flush-mounted box



## RELATED PRODUCTS

| Art.-No.     | Image                                                                             | Monitoring                | Supply               | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|--------------|-----------------------------------------------------------------------------------|---------------------------|----------------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AXCT009ML    |  | Central power supply (ML) | Central power supply | RAL 9003 | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| AXCT009ML-AZ |  | Central power supply (ML) | Central power supply | RAL 7016 | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |

As of: 02.09.2026 - Subject to technical changes and errors.