



**Art.-Nr: AXDC009ML-E**  
**Exit sign Centralised power supply systems**  
**Rope ceiling structure, CPS, 30 m, IP40, Zinc die-cast,**  
**Stainless steel, Set of pictograms**

Modern zinc die-cast emergency exit sign luminaire with wire suspension for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/AXDC009ML-E](http://www.rp-group.com/en/item/AXDC009ML-E)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign                        |
| Mounting               | Rope ceiling structure           |
| Recognition distance   | 30 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Stainless steel                  |
| Protection type (IP)   | IP40                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | single luminaire switching       |
| Input voltage AC       | 230 V                            |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Input voltage DC                        | 216 V               |
| Power max.                              | 4,5 W               |
| Power maintained                        | 4,5 W               |
| Power non-maintained                    | 1,1 W               |
| Ambient temperature maintained mode     | -20 °C to 40 °C     |
| Ambient temperature non-maintained mode | -20 °C to 40 °C     |
| Depth                                   | 80 mm               |
| Width                                   | 312 mm              |
| Height                                  | 228 mm              |
| Weight                                  | 2.09                |
| Weight incl. packaging                  | 2.58                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Dimming function                        | Yes                 |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260581715489       |



## TECHNICAL DRAWING

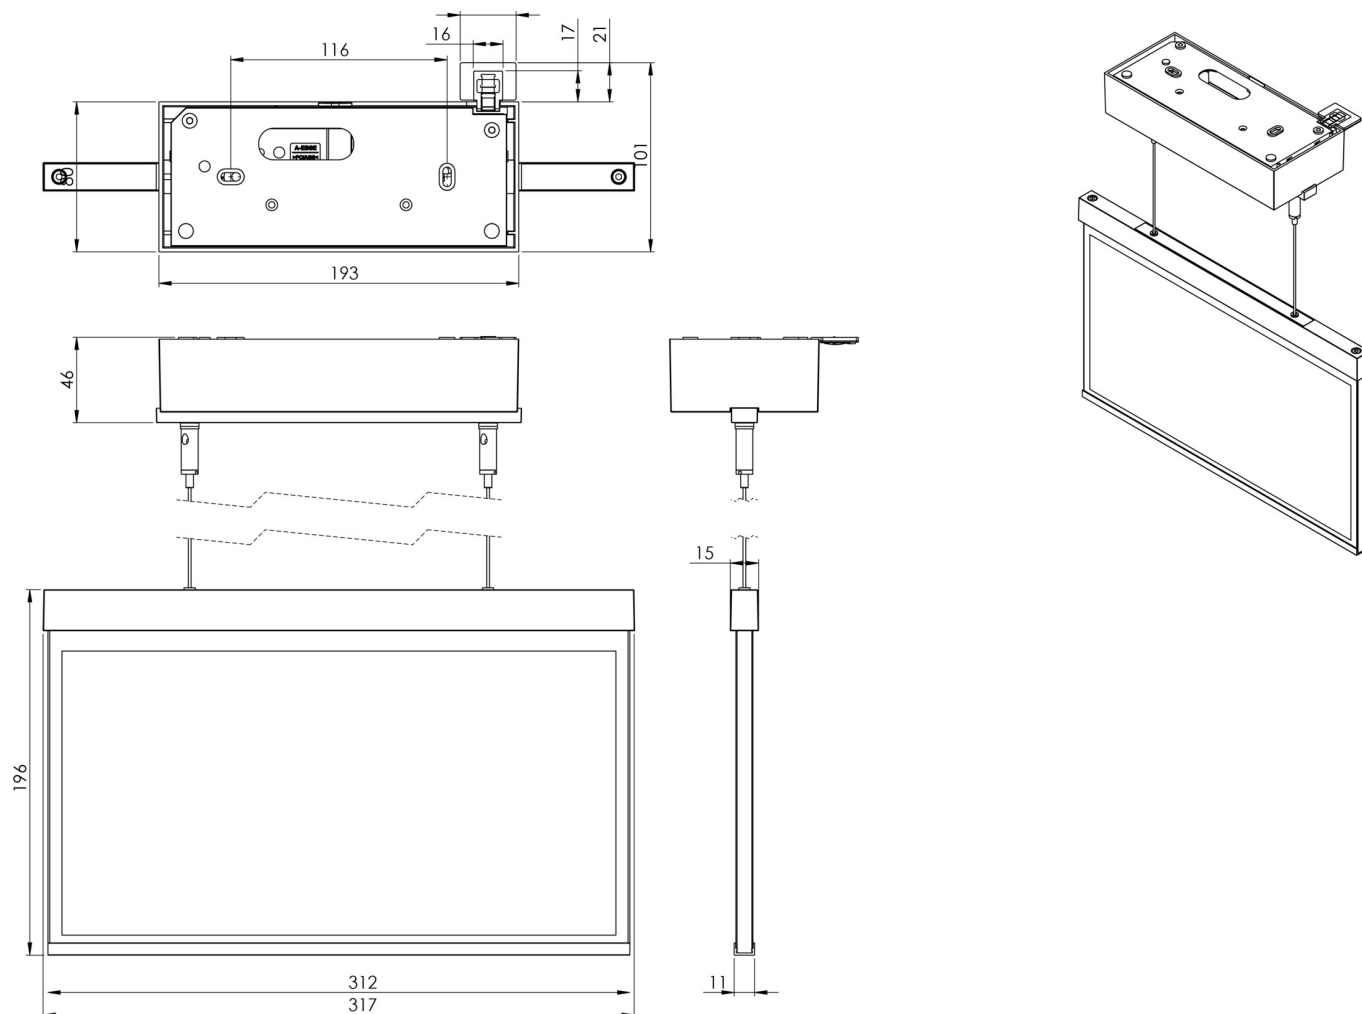

## ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX



## RELATED PRODUCTS

| Art.-No.     | Image                                                                              | Monitoring                | Supply               | Color     | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|--------------|------------------------------------------------------------------------------------|---------------------------|----------------------|-----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AXDC009ML    |   | Central power supply (ML) | Central power supply | RAL 9003  | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| AXDC009ML-AZ |   | Central power supply (ML) | Central power supply | RAL 7016  | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| AXDC509CC    |   | CoreCompact 24 (CC)       | Central power supply | RAL 9003  | €€         | Yes           | low               | Yes                |                  | central                     |
| AXDC509CC-AZ |   | CoreCompact 24 (CC)       | Central power supply | RAL 7016  | €€         | Yes           | low               | Yes                |                  | central                     |
| AXDC509CC-E  |  | CoreCompact 24 (CC)       | Central power supply | Edelstahl | €€         | Yes           | low               | Yes                |                  | central                     |

As of: 02.09.2026 - Subject to technical changes and errors.