




Art.-Nr: NVGS653SC
Individual battery supply
NVG+SelfControl (SC) / 130 W/1h, 65 W/3h, 30 W/8h, 230 V
(SIN)

Self-contained battery supply with output voltage 230V/AC sine voltage, 2 wire system up to 500m distance. for supply of 1 or 2 luminaires with fluorescent lamps, light bulbs or LED illuminants at 100% luminous flux.

Technical specifications according to DIN - VDA 0108-100 and DIN EN 60598 - 2 - 22. With deep discharge protection and integrated switch - on lock, threshold switch. The supply is handled by a maintenance-free, long life and gas-proof Pb rechargeable battery. The fully electronic and time controlled charging ensures an extended battery life. The LED function and monitoring display shows operating states and faults. A manual activation of a function test is possible through the built-in test button.

Automatic monitoring of safety luminaire with SelfControl.

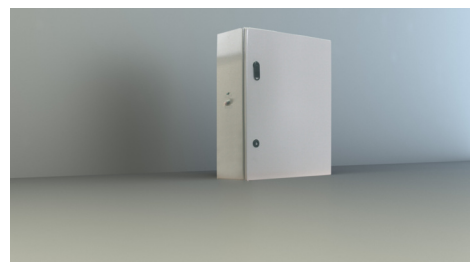

More information

www.rp-group.com/en/item/NVGS653SC




TECHNICAL DATA

Certification	CE, WEEE
Charger	Yes
Battery compartment	Yes
Supply power 1 h	130 W
Supply power 3 h	65 W
Supply power 8 h	30 W
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Output voltage AC	230 V (SIN)
Material	Steel sheet
Housing color	Light grey
Insulation class	IP54
Depth	210 mm
Width	400 mm
Height	500 mm
Weight	15 kg



Weight incl. packaging	15 kg
Customs tariff number	85389091
GTIN	4260766557040

TRANS.MASSZEICHNUNG

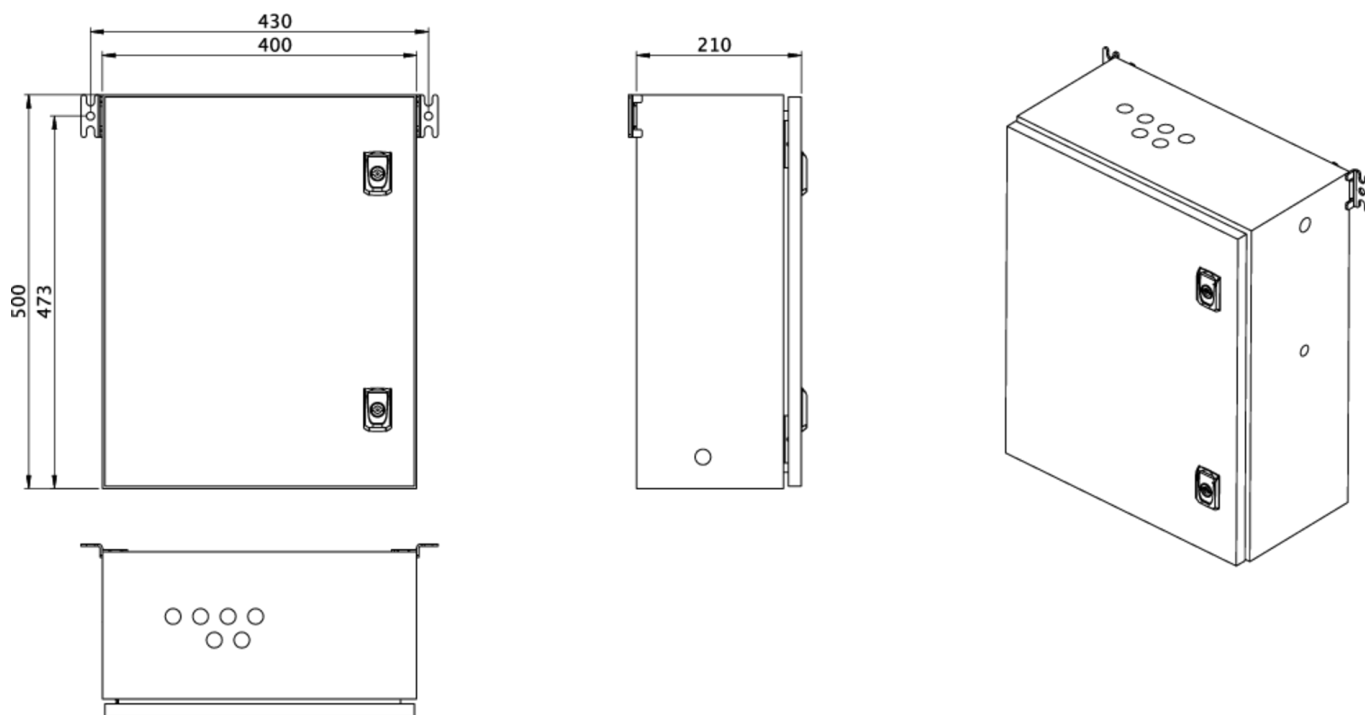

As of: 12.05.2026 - Subject to technical changes and errors.