



**Art.-Nr: FMW008SC**  
**Exit sign Self-contained**  
**Wall mounting, 8 h, 20 m, IP65, Zinc die-cast, White, Set of pictograms**

Robust zinc die-cast emergency exit sign luminaire for mounting on the wall and for identifying emergency and escape routes.

The pictogram is fitted on the inside where it is protected by a transparent pane.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/FMW008SC](http://www.rp-group.com/en/item/FMW008SC)




## TECHNICAL DATA

|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Wall mounting               |
| Recognition distance   | 20 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Zinc die-cast               |
| Housing color          | White                       |
| Protection type (IP)   | IP65                        |
| Impact resistance (IK) | 8                           |
| Certification          | WEEE, CE, D-Sign, HACCP     |
| Insulation class       | 1                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 8 h                         |
| Battery                | NIMH 4,8 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |
| Input frequency        | 50 / 60 Hz                  |
| Power max.             | 4,2 W                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power maintained                        | 4,2 W               |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 58 mm               |
| Width                                   | 262 mm              |
| Height                                  | 188 mm              |
| Weight                                  | 2.08                |
| Weight incl. packaging                  | 2.18                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260581710903       |

## TECHNICAL DRAWING

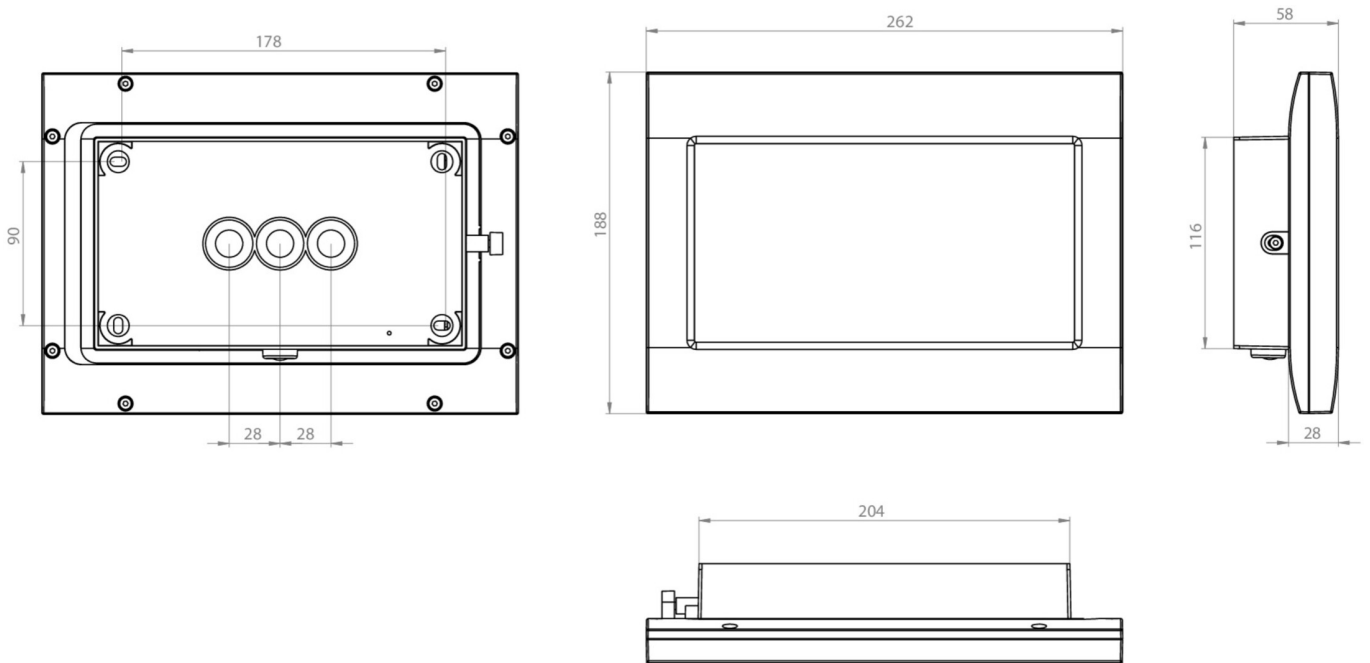



## ACCESSORY LIST

FMWA001 -

FMDA001 - Ceiling bracket, one-sided, white - Professional bracket for FM emergency lights

FMDA002-AZ - Double-sided ceiling bracket for emergency lighting - anthracite, FM-compatible

FMFH -

FMDA001-AZ - High-quality ceiling bracket for FM luminaires, one-sided, anthracite

FMDA002 - Professional ceiling bracket (double-sided) for FM emergency lights, white

NIMHHT4820Q - Battery

## RELATED PRODUCTS

| Art.-No.    | Image                                                                              | Monitoring       | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-------------|------------------------------------------------------------------------------------|------------------|----------------|----------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
| FMW008SC-AZ |  | SelfControl (SC) | Single battery | RAL 7016 | €          | no            | high              | no                 | unlimited       | itself                      |

As of: 23.07.2026 - Subject to technical changes and errors.