## Art.-Nr: AIR009ML
## Exit sign Centralised power supply systems Recessed wall mounting, Central power supply (ML), CPS, 15 m, IP40, Zinc die-cast, White, Set of pictograms



Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE


More information
www.rp-group.com/en/item/AIR009ML


## TECHNICAL DATA


| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Recessed wall mounting |
| Recognition distance | 15 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |


| | |
|---|---|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 2,25 W |
| Power maintained | 2,25 W |
| Power non-maintained | 0,7 W |
| Ambient temperature maintained mode | -35 °C to 40 °C |
| Ambient temperature non-maintained mode | -35 °C to 40 °C |
| Depth | 58 mm |
| Width | 167 mm |
| Height | 118 mm |
| Installation dimensions Diameter | 68 mm |
| Weight | 0.54 |
| Weight incl. packaging | 0.79 |
| Connection cross-section | 2.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Customs tariff number | 94056180 |
| GTIN | 4260581713430 |

## TECHNICAL DRAWING

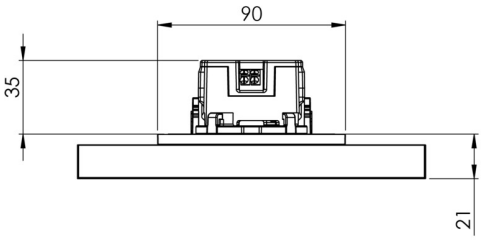

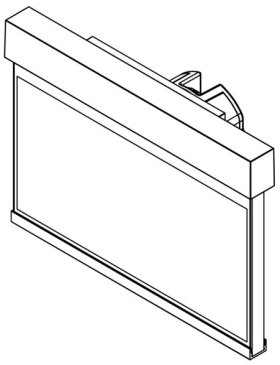
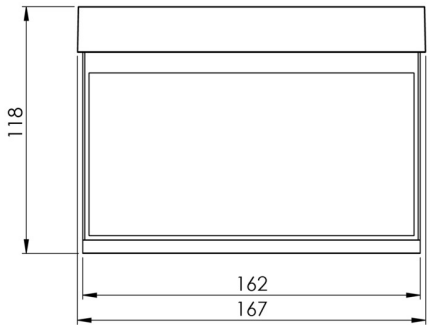
## RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|---|---|---|---|---|---|---|---|---|---|---|
| AIR009ML-AZ |  | Central power supply (ML) | Central power supply | RAL 7016 | €€€ | Yes | low | Yes | 1,920 per system | central |
| AIR009ML-E |  | Central power supply (ML) | Central power supply | Edelstahl | €€€ | Yes | low | Yes | 1,920 per system | central |
| AIR509CC |  | CoreCompact 24 (CC) | Central power supply | RAL 9003 | €€ | Yes | low | Yes | | central |
| AIR509CC-AZ |  | CoreCompact 24 (CC) | Central power supply | RAL 7016 | €€ | Yes | low | Yes | | central |
| AIR509CC-E |  | CoreCompact 24 (CC) | Central power supply | Edelstahl | €€ | Yes | low | Yes | | central |

As of: 22.11.2026 - Subject to technical changes and errors.