



**Art.-Nr: ASMU013WB**  
**Exit sign Self-contained**  
**Universal, 3 h, 22 m, IP40, Aluminium, Anodised aluminium,**  
**Set of pictograms**

Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information  
[www.rp-group.com/en/item/ASMU013WB](http://www.rp-group.com/en/item/ASMU013WB)




## TECHNICAL DATA

|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Universal                   |
| Recognition distance   | 22 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Aluminium                   |
| Housing color          | Anodised aluminium          |
| Protection type (IP)   | IP40                        |
| Impact resistance (IK) | 3                           |
| Certification          | WEEE, CE                    |
| Insulation class       | 1                           |
| Supply                 | Self-contained              |
| Monitoring             | Wireless Basic (WB)         |
| Bridging time          | 3 h                         |
| Battery                | LiFePO4 3,2 V/3,3 Ah        |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Input voltage DC                        | - V                 |
| Power max.                              | 5,3 W               |
| Power maintained                        | 3,9 W               |
| Power non-maintained                    | 1,5 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 54 mm               |
| Width                                   | 277 mm              |
| Height                                  | 184 mm              |
| Weight                                  | 0.89                |
| Weight incl. packaging                  | 1.06                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Connector           |
| Dimming function                        | No                  |
| Luminous flux mains                     | 190 lm              |
| Luminous flux emergency                 | 190 lm              |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260659561062       |

## TECHNICAL DRAWING

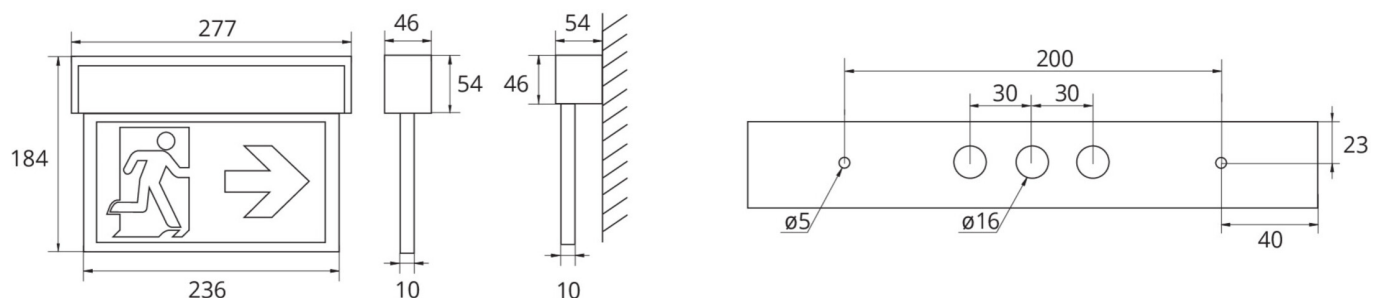



## ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

BALLPLX-KMU.01 -

## RELATED PRODUCTS

| Art.-No.         | Image | Monitoring                 | Supply         | Color        | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|------------------|-------|----------------------------|----------------|--------------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| ASMU013SC        |       | SelfControl (SC)           | Single battery | Alu eloxiert | €          | no            | high              | no                 | unlimited        | itself                      |
| ASMU013SC-G10    |       | SelfControl (SC)           | Single battery | Alu eloxiert | €          | no            | high              | no                 | unlimited        | itself                      |
| ASMU013WL        |       | Wireless Professional (WL) | self contained | Alu eloxiert | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| ASMU013WL-G10    |       | Wireless Professional (WL) | self contained | Alu eloxiert | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| ASMU013SC-WS     |       | SelfControl (SC)           | Single battery | RAL 9003     | €          | no            | high              | no                 | unlimited        | itself                      |
| ASMU013SC-WS-G10 |       | SelfControl (SC)           | Single battery | RAL 9003     | €          | no            | high              | no                 | unlimited        | itself                      |
| ASMU013WB-WS     |       | Wireless Basic (WB)        | self contained | RAL 9003     | €€         | yes           | low               | yes                | 50               | central                     |
| ASMU013WL-WS     |       | Wireless Professional (WL) | self contained | RAL 9003     | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| ASMU013WL-WS-G10 |       | Wireless Professional (WL) | self contained | RAL 9003     | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 21.07.2026 - Subject to technical changes and errors.