



**Art.-Nr: KCW013-IP64**  
**Exit sign Self-contained**  
**Wall mounting, Without monitoring, 3 h, 30 m, IP64,**  
**Polycarbonate, White**

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/KCW013-IP64](http://www.rp-group.com/en/item/KCW013-IP64)



## TECHNICAL DATA


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Wall mounting               |
| Recognition distance   | 30 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP64                        |
| Impact resistance (IK) | 6                           |
| Certification          | WEEE, CE                    |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | Without monitoring          |
| Bridging time          | 3 h                         |
| Battery                | NIMH 4,8 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Power max.                              | 6,1 W               |
| Power maintained                        | 4,5 W               |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 60 mm               |
| Width                                   | 340 mm              |
| Height                                  | 170 mm              |
| Weight                                  | 0.82                |
| Weight incl. packaging                  | 0.91                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 220 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260581712426       |



## TECHNICAL DRAWING

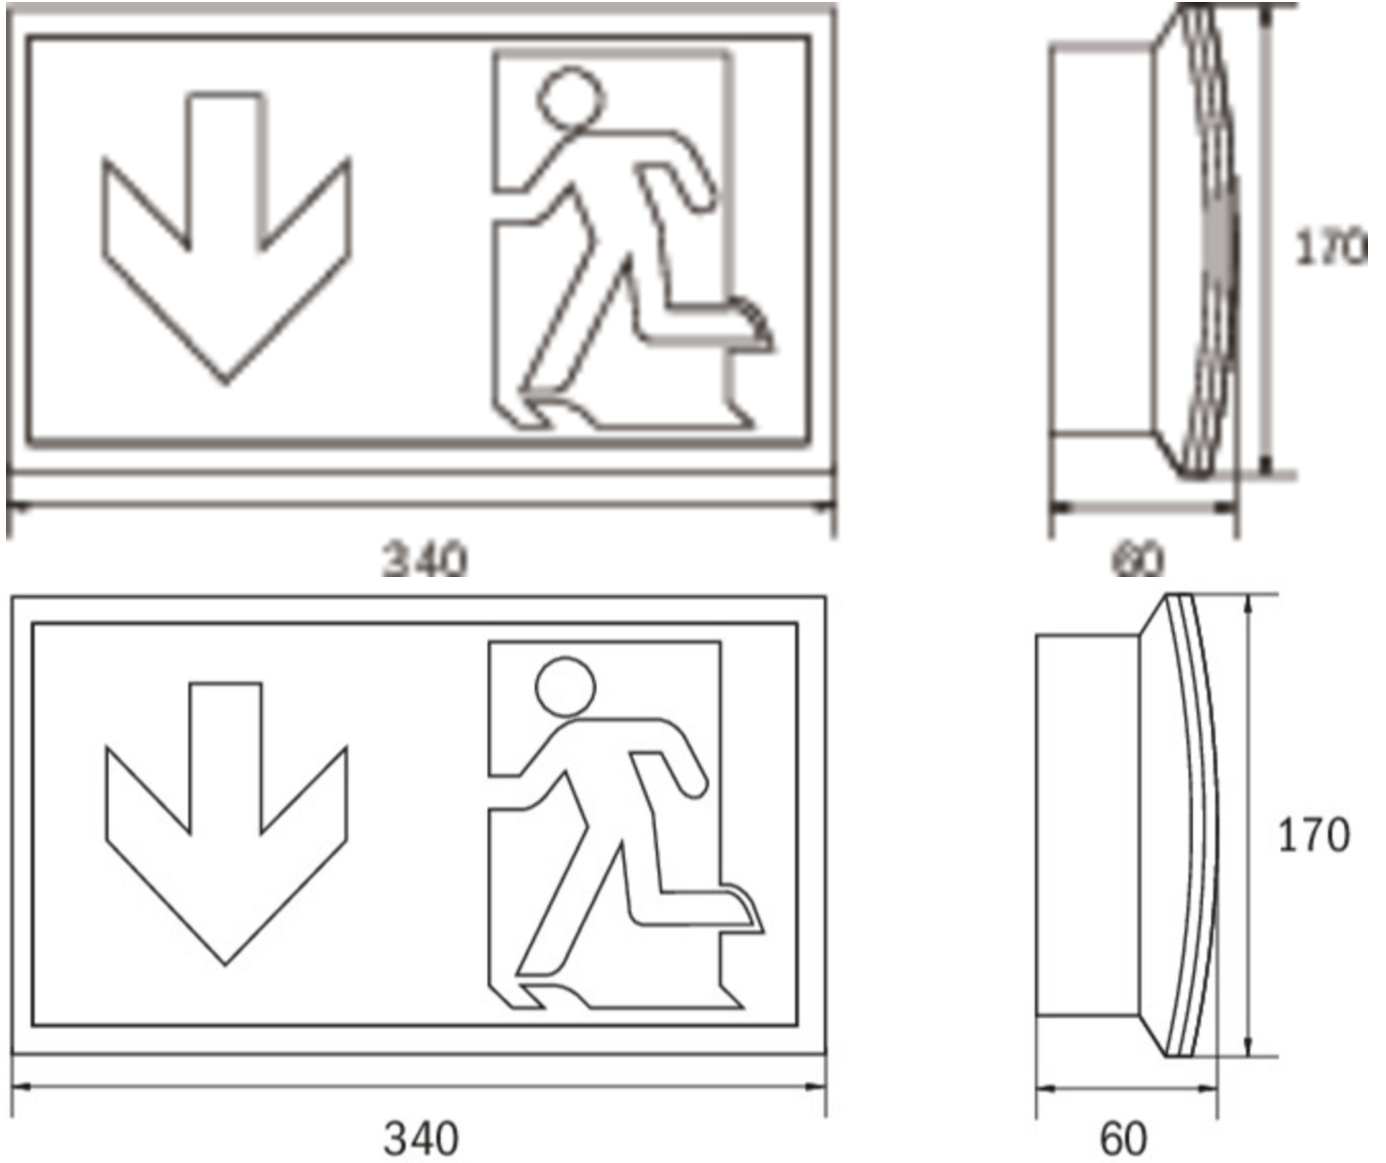

## ACCESSORY LIST

- BALL2 - Wire mesh guard
- DWKCW -
- KC-IP65 -
- KCER - Mounting frame
- KCWFH - Wall holder



## RELATED PRODUCTS

| Art.-No.          | Image | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-------------------|-------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KCW013-P-IP64     |       | Without monitoring         |                | RAL 9003 |            |               |                   |                    |                  |                             |
| KCW013SC-IP64     |       | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KCW013SC-IP64-LEX |       | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KCW013SC-P-IP64   |       | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KCW013WL-IP64     |       | Wireless Professional (WL) | Single battery | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 05.09.2025 - Subject to technical changes and errors.