



**Art.-Nr: KCW018-IP64**  
**Exit sign, Emergency light Self-contained**  
**Wall mounting, Without monitoring, 8 h, 30 m, IP64,**  
**Polycarbonate, White**

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/KCW018-IP64](http://www.rp-group.com/en/item/KCW018-IP64)



## TECHNICAL DATA


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign, Emergency light  |
| Mounting               | Wall mounting               |
| Recognition distance   | 30 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP64                        |
| Impact resistance (IK) | 6                           |
| Certification          | WEEE, CE                    |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | Without monitoring          |
| Bridging time          | 8 h                         |
| Battery                | NIMH 9,6 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Power max.                              | 6,7 W               |
| Power maintained                        | 4,5 W               |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 60 mm               |
| Width                                   | 340 mm              |
| Height                                  | 170 mm              |
| Weight                                  | 0.94                |
| Weight incl. packaging                  | 1.03                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 220 lm              |
| Luminous flux emergency                 | 160 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260581712525       |



## TECHNICAL DRAWING

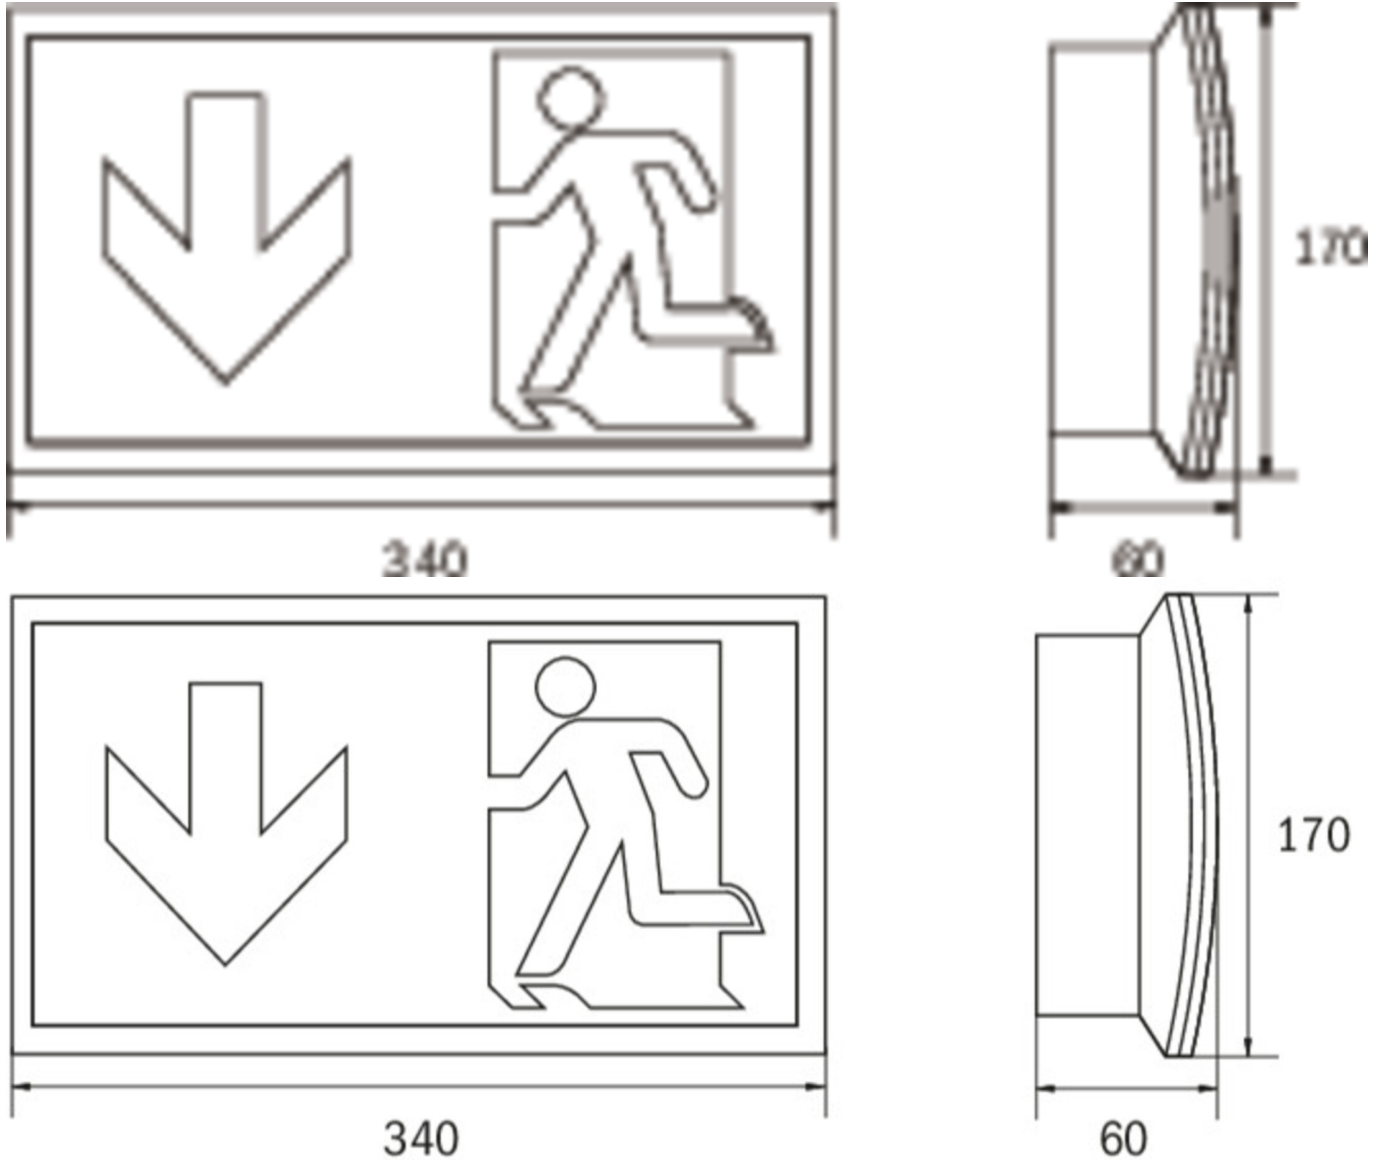

## ACCESSORY LIST

- BALL2 - Wire mesh guard
- DWKCW -
- KC-IP65 -
- KCER - Mounting frame
- KCWFH - Wall holder

As of: 20.09.2025 - Subject to technical changes and errors.