



Art.-Nr: HO-2708MW-WW

LED outdoor luminaire "TONDO", wall / ceiling surface mounting, round, 280x80mm, 13W, 1000lm, 3000K, CRI >80, IP54, white, switchable

Robust, round surface-mounted luminaire (IP54) made of high-quality die-cast aluminium for flexible wall and ceiling mounting in outdoor areas. High light quality with CRI >80.



LED exterior façade luminaire, Tondo series. Housing made from die-cast aluminium, dark grey or white, powder-coated, IP54. Diffuser made from plastic (PC), opal, UV-stabilised. Operating unit installed (can be switched). Version with CASAMBI® Bluetooth control available.



More information
www.rp-group.com/en/item/HO-2708MW-WW



TECHNICAL DATA


Dimensions	
Diameter	280 mm
Product dimensions Height	80 mm
Product weight	1.84 kg
Packaging dimensions	
Packaging dimensions Length	330 mm
Packaging dimensions Width	330 mm
Packaging dimensions Height	100 mm
Weight incl. packaging	1.95 kg
Housing material	
Housing material	Aluminium
Certification	
Certification	CE
Protection type (IP)	IP54
Electrical connection	
System performance	13 W
Input voltage AC	220-240V / 50-60Hz V
Power factor	0.95 PF
power supply	



Electrical design	with internal control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	985 lm
Colour rendering index	> 80 Ra
Beam angle	119 °
Color temperature	3000 K
Light color	830
UGR	24.2
Service life	50000 h, L80
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	40 °C
Mounting	
Mounting	Universal
Color	
Color	White



TEXT.LICHTVERTEILUNG

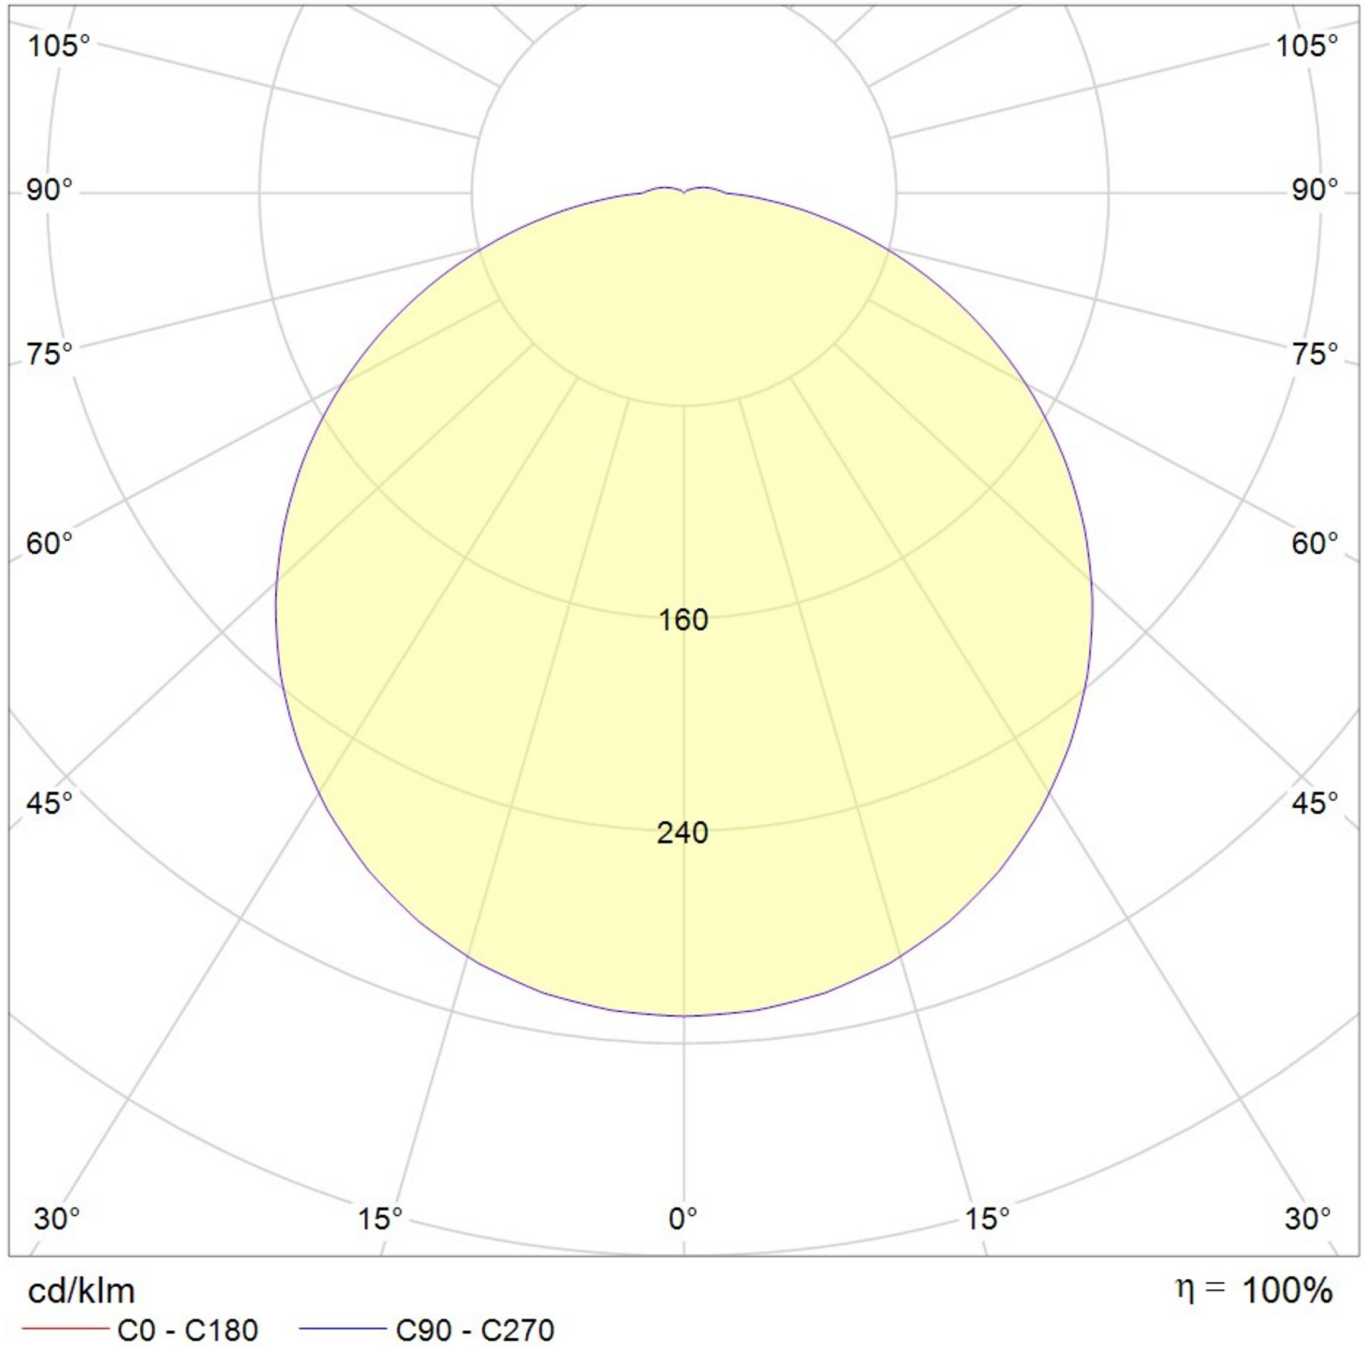

As of: 12.05.2026 - Subject to technical changes and errors.