



Art.-Nr: KCW021SC-IP64COOLIP54
Emergency light Self-contained
Universal, 1 h, IP65/54, Polycarbonate, White, Flexiklick

Slim convex plastic safety luminaire for wall mounting. Emergency exit sign luminaire with plug-in set of pictograms fitted on the inside without the use of solvents. Without the use of pictograms, use at the same time as a safety luminaire with the crystal-clear cover included.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

www.rp-group.com/en/item/KCW021SC-IP64COOLIP54



TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65/54
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	6 W
Power maintained	4,5 W



Power non-maintained	0,35 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	170 mm
Width	340 mm
Height	60 mm
Weight	0.84
Weight incl. packaging	0.93
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	430 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4260682144096



TECHNICAL DRAWING

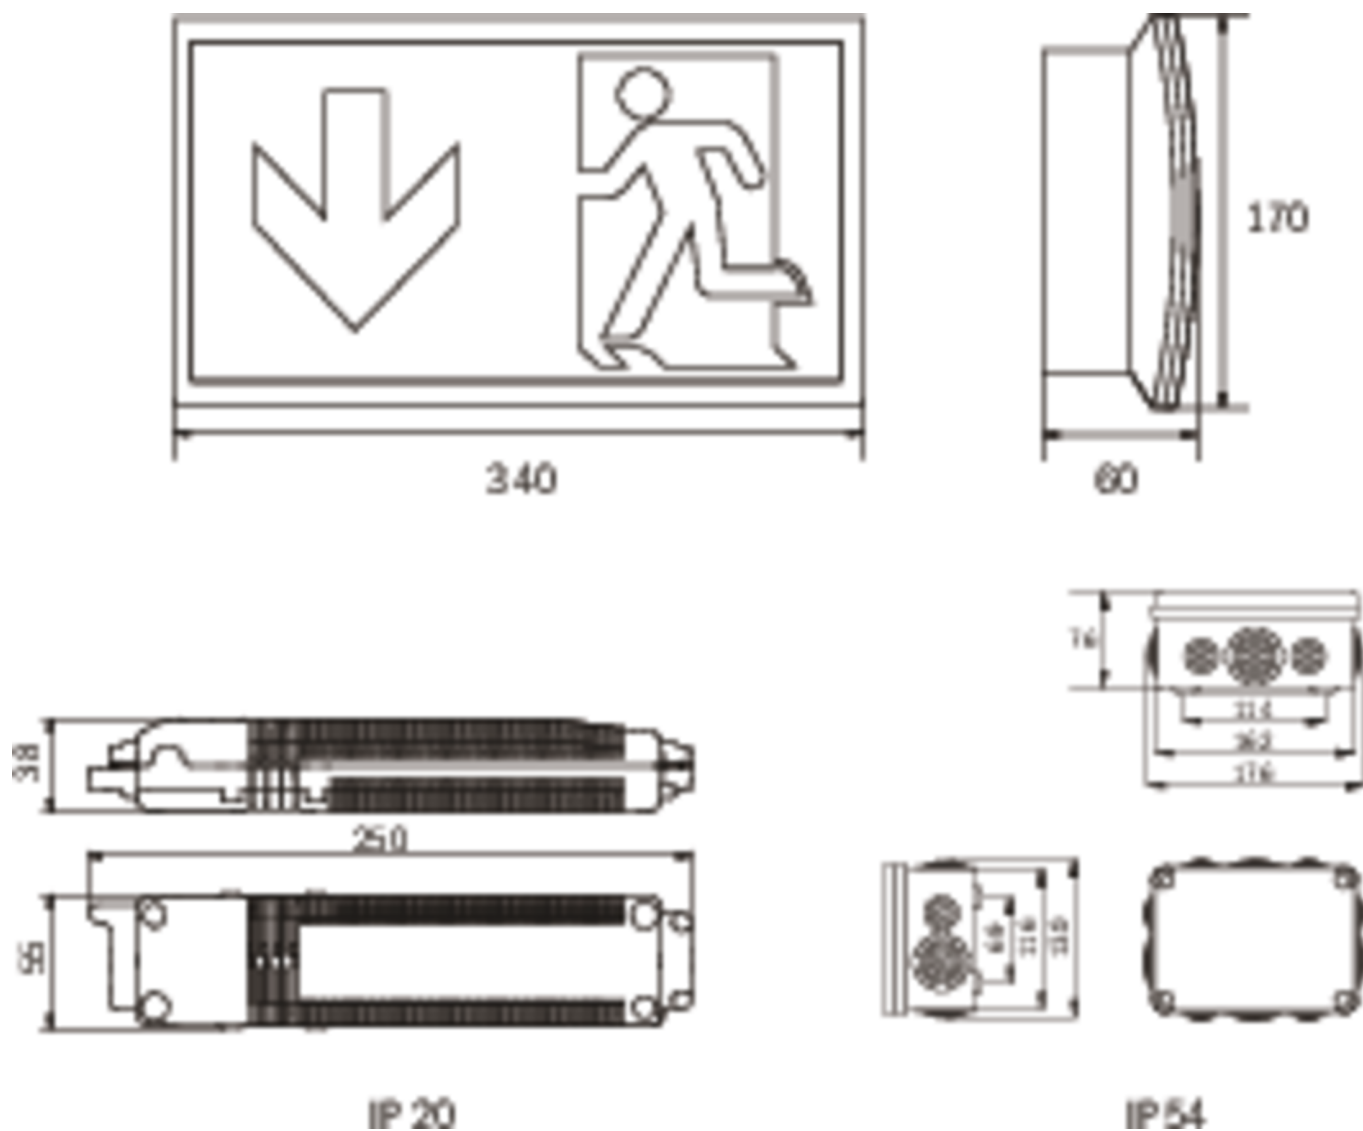

ACCESSORY LIST

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 - Professional electrical engineering module for critical safety applications

KCER - Mounting frame

KCWFH - Wall holder

As of: 21.07.2026 - Subject to technical changes and errors.