RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: QCW009
General light, Emergency light Centralised power supply systems
Universal, Without monitoring, CPS, IP54, Zinc die-cast, White



Round zinc die-cast luminaire for general lighting and illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In robust construction and timeless design, suitable for indoor and outdoor use.

More information
www.rp-group.com/en/item/QCW009


TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	Waste disposal, CE, D-sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 Hz
Input voltage DC	216 V
Power max.	17 W
Power maintained	17 W


Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.59
Weight incl. packaging	2.92
Connection cross-section	2,5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	1600 lm
Luminous flux emergency	1600 lm
EOF	1
Customs tariff number	94056180
GTIN	4260682141675

TECHNICAL DRAWING

QCW

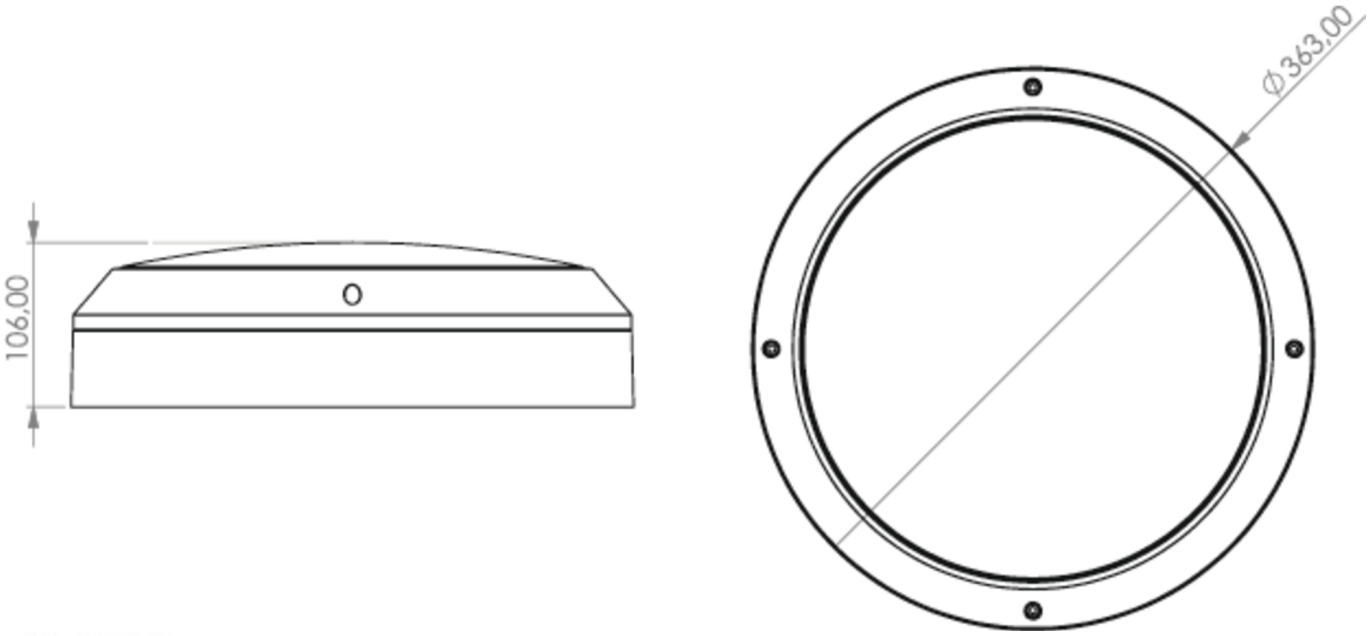

QCW

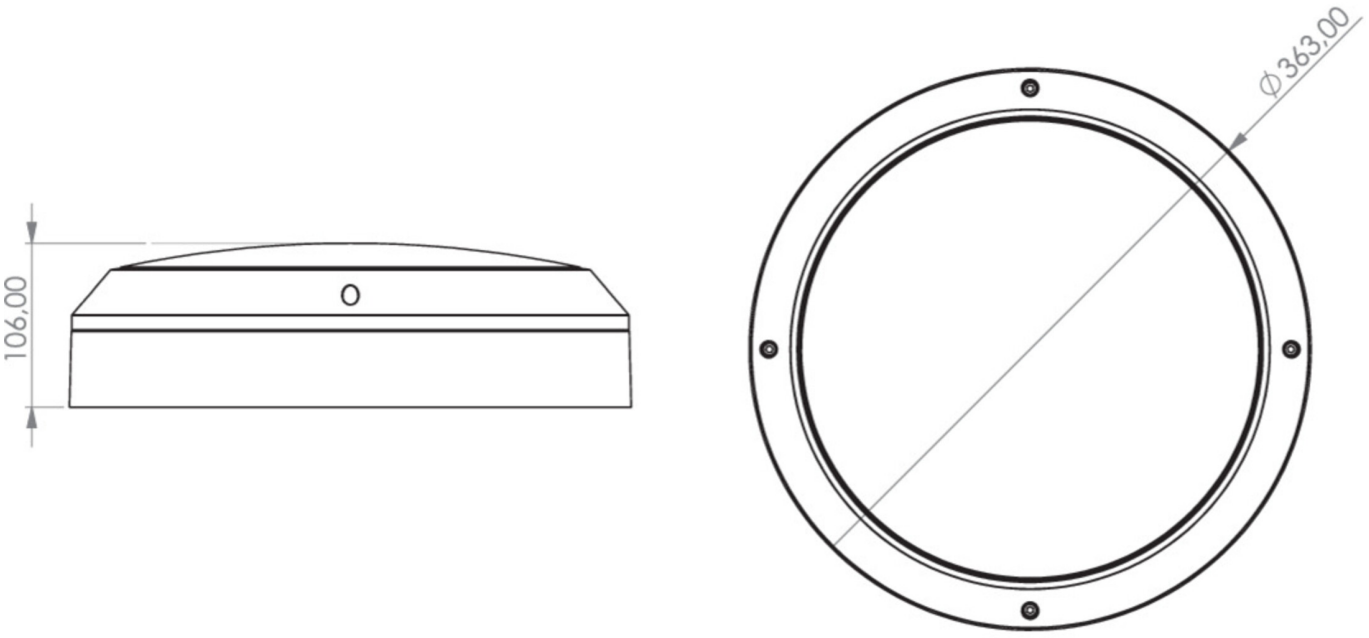

As of: 31.10.2026 - Subject to technical changes and errors.