




Art.-Nr: LFD15001SC-NW
General light, Emergency light
Universal, 1 h, IP65, Polycarbonate, Light grey

The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.

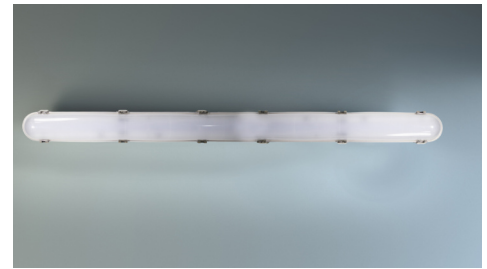

More information

www.rp-group.com/en/item/LFD15001SC-NW




TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2 V/3,0 Ah
Power max.	58 W
Power maintained	55 W
Power non-maintained	0,7 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1560 mm
Width	82 mm
Height	97 mm
Weight	2.2



Weight incl. packaging	2.55
Luminous flux mains	6500 lm
Luminous flux emergency	500 lm
EOF	0.08
Customs tariff number	94051140
GTIN	4260659566487

TECHNICAL DRAWING

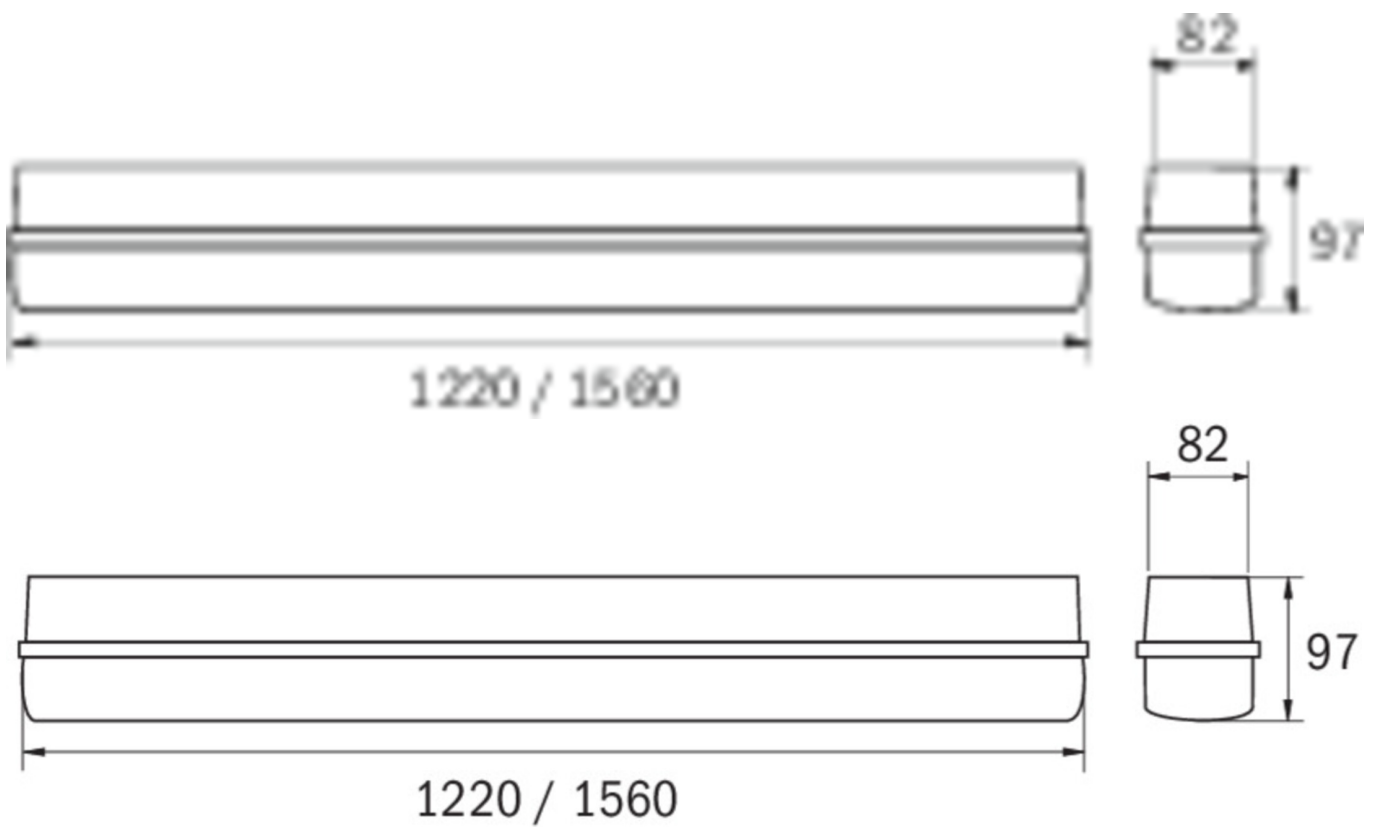

As of: 24.07.2026 - Subject to technical changes and errors.