## Art.-Nr: LFD15001SC-NW
## General light, Emergency light
## Universal, SelfControl (SC), 1 h, IP65, Polycarbonate, Light grey



The robust LED wall- and ceiling-mounted luminaire made from fibreglass-reinforced polyester for damp room applications. The external support brackets simplify mounting.

Automatic monitoring of safety luminaire with SelfControl.


More information
www.rp-group.com/en/item/LFD15001SC-NW

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | General light, Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | Light grey |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 8 |
| Certification | CE, Waste disposal |
| Insulation class | 1 |
| Monitoring | SelfControl (SC) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/3,0 Ah |
| Power max. | 58 W |
| Power maintained | 55 W |
| Power non-maintained | 0,7 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 1560 mm |
| Width | 82 mm |
| Height | 97 mm |

| | |
|---|---|
| Weight | 2.2 |
| Weight incl. packaging | 2.55 |
| Luminous flux mains | 6500 lm |
| Luminous flux emergency | 500 lm |
| EOF | 0.08 |
| Customs tariff number | 94051140 |
| GTIN | 4260659566487 |

## TECHNICAL DRAWING

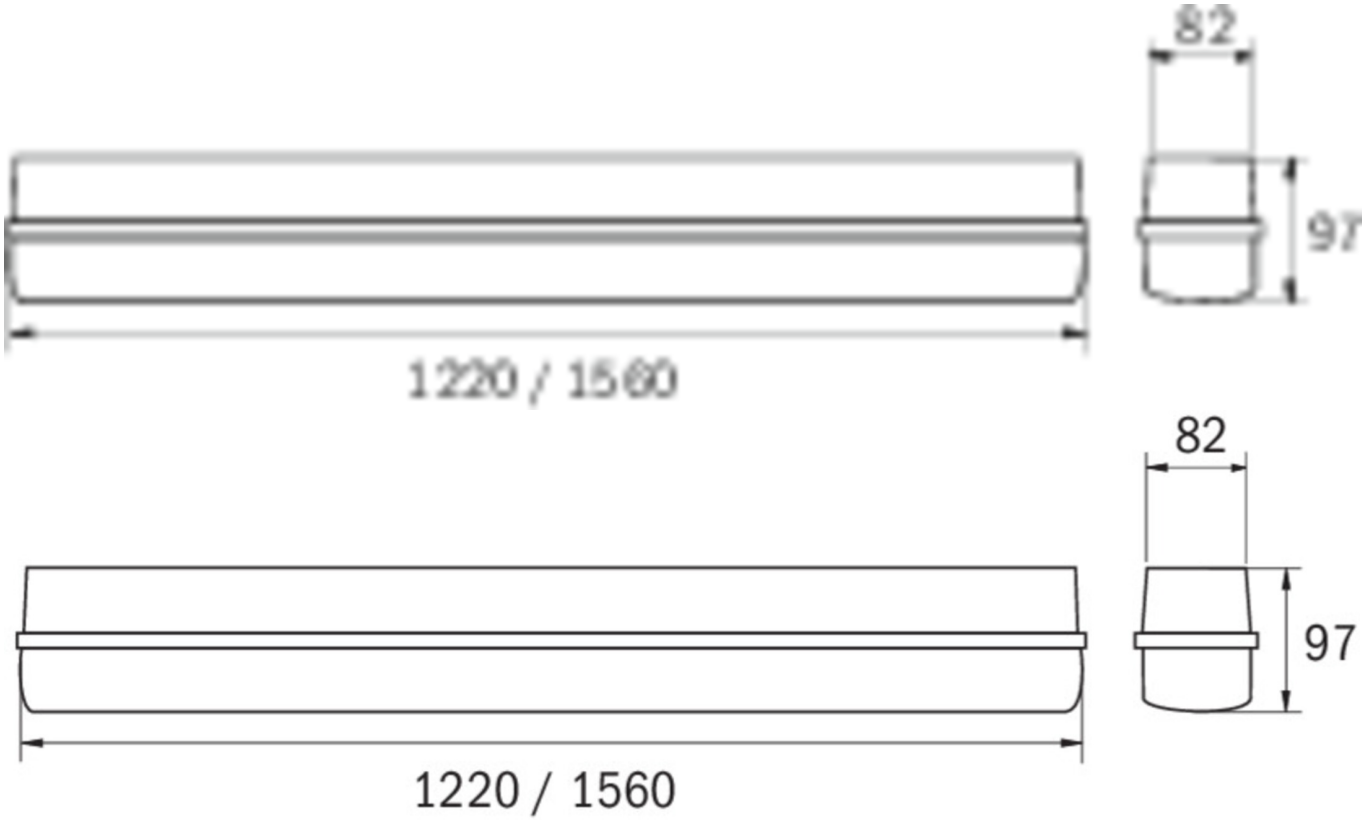


As of: 09.11.2026 - Subject to technical changes and errors.