



Art.-Nr: YEDTA-REND-2401-U

LED recessed downlight "TAURE", round, 226x110mm, 24W, 2800lm, 4000K, CRI >80, IP54, UGR <19, white, Dali dimmable
High-quality, round recessed downlight made of powder-coated aluminium (226x110mm) for demanding applications with glare limitation (UGR <19) and protection class IP54.

LED recessed downlight, TAURE series. IP54. Housing made from aluminium, white, powder-coated. Smooth aluminium reflector. Operating unit can be switched or dimmed (DALI dimmer), external. UGR < 19 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available. DC compatibility on request. Ra > 90 on request.



More information

www.rp-group.com/en/item/YEDTA-REND-2401-U



TECHNICAL DATA


Dimensions	
Diameter	226 mm
Product dimensions Height	110 mm
Product weight	1 kg
Packaging dimensions	
Packaging dimensions Length	230 mm
Packaging dimensions Width	230 mm
Packaging dimensions Height	120 mm
Weight incl. packaging	1.1 kg
Cutout Dimensions	
Diameter	210 mm
Color	
Color	White
Housing material	
Housing material	Aluminium
Certification	
Insulation class	2
Protection type (IP)	IP54
Glow wire test	650 °C





Electrical connection	
Connection cross-section	1.5 mm ²
Type of dimming	DALI
System performance	24 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	5 A
Power factor	0.95 PF
Starting time	50 µs
Light data	
Light source	LED
Rated luminous flux	2800 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	62,4 °
Color temperature	4000 K
Light color	840
UGR	18.2
Service life	50000 h, L80
Light yield	117 lm/w
Temperatures	
Ambient temperature (Min)	0 °C
Ambient temperature (Max)	+25 °C
Mounting	
Mounting	Ceiling mounting
power supply	
Number of power supply units on LS B10A	30 pcs.
Number of power supply units on LS B16A	50 pcs.
Number of power supply units at LS C10A	50 pcs.
Number of power supply units at LS C16A	83 pcs.
Electrical design	with internal control gear, Dimmable



TEXT.LICHTVERTEILUNG

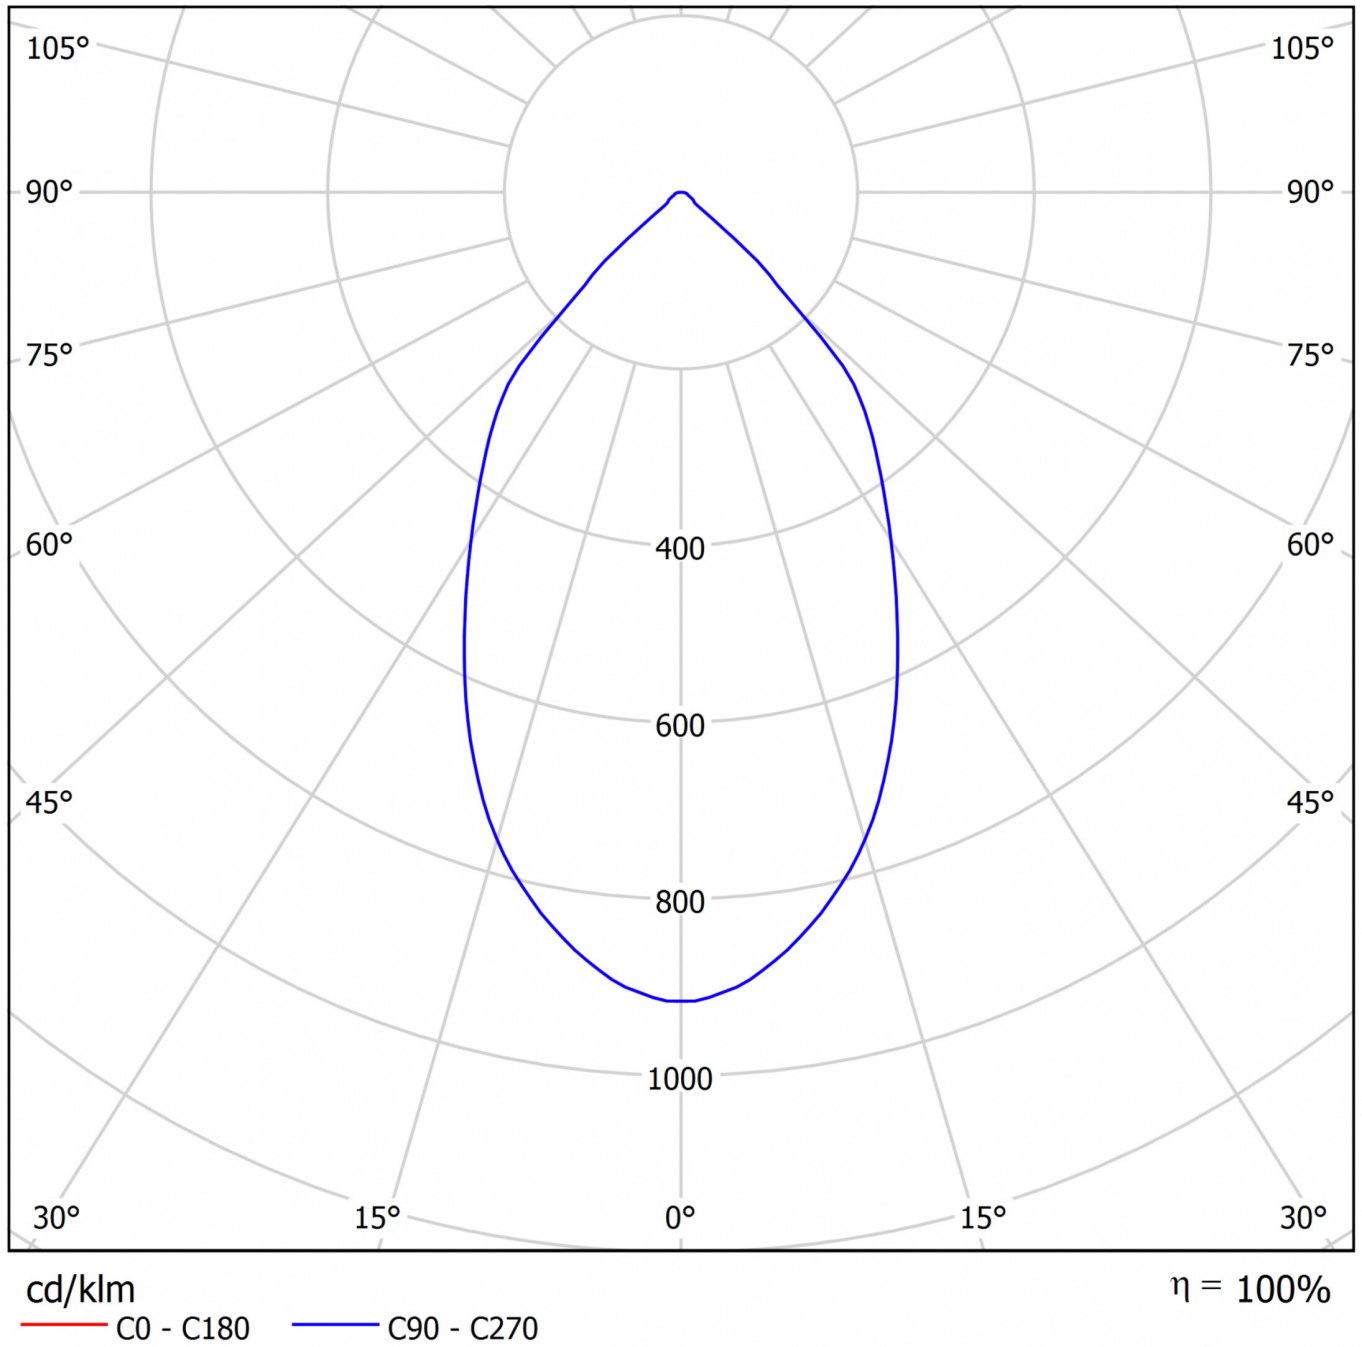

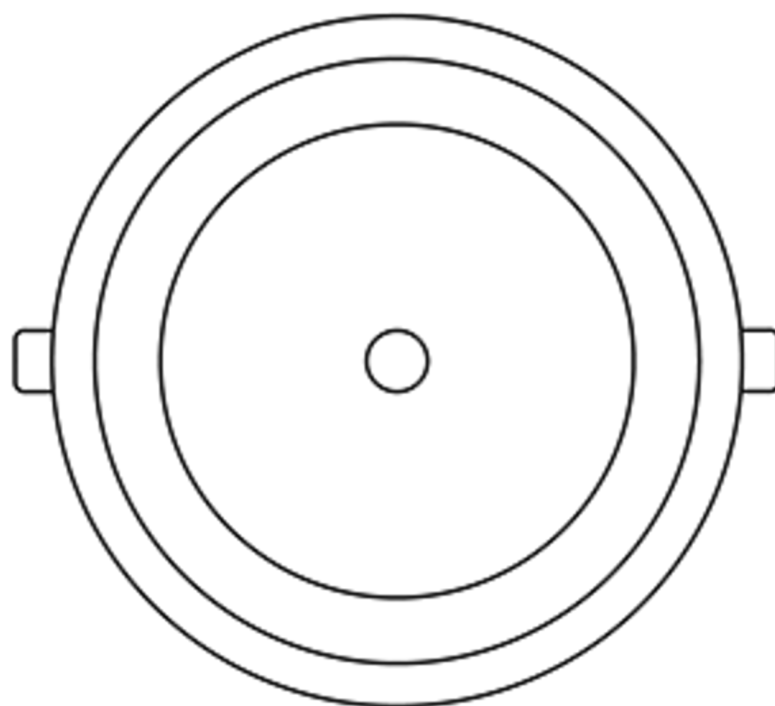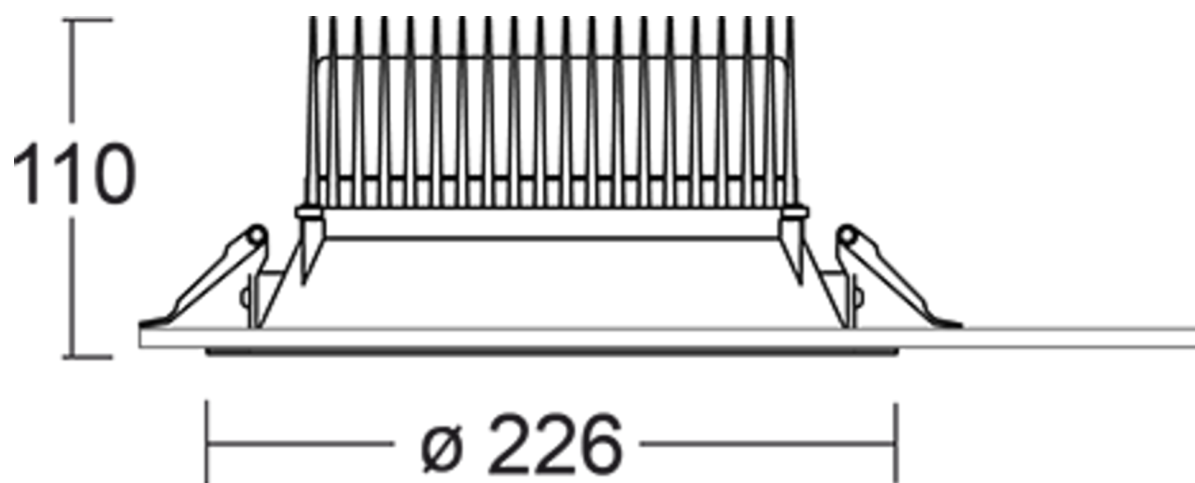

As of: 17.03.2026 - Subject to technical changes and errors.