



Art.-Nr: YWDPO-REND-3301-D

LED luminaire "PORIO", wall / ceiling recessed mounting, round, 464x125mm, 33W, 3000lm, 4000K, CRI >80, IP20, white, Dali dimmable

Professional, round LED recessed luminaire for walls or ceilings, ideal for modern commercial and residential spaces, equipped with efficient 4000K lighting and flexible DALI control.



LED ceiling- and wall-mounted luminaire, PORIO series, recessed design, as the basic lighting for commercial and residential rooms. Housing made from steel plate, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI Bluetooth control available. DC compatible.



More information

www.rp-group.com/en/item/YWDPO-REND-3301-D



TECHNICAL DATA


Dimensions	
Diameter	464 mm
Product dimensions Height	90 mm
Product weight	4 kg
Packaging dimensions	
Packaging dimensions Length	480 mm
Packaging dimensions Width	480 mm
Packaging dimensions Height	140 mm
Weight incl. packaging	4.2 kg
Color	
Color	White
Housing material	
Housing material	Aluminium
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP20





Glow wire test	650 °C
Electrical connection	
Connection cross-section	1.5 mm ²
Type of dimming	DALI
System performance	33 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	13.6 A
Power factor	0.97 PF
Starting time	304 µs
power supply	
Number of power supply units on LS B10A	18 pcs.
Number of power supply units on LS B16A	28 pcs.
Number of power supply units at LS C10A	30 pcs.
Number of power supply units at LS C16A	46 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Dimmable
Light data	
Light source	LED
Rated luminous flux	3000 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	87,6 °
Color temperature	4000 K
Light color	840
UGR	20.6
Service life	50000 h, L80
Light yield	91 lm/w
Temperatures	
Ambient temperature (Min)	0 °C
Ambient temperature (Max)	+25 °C
Mounting	
Mounting	Ceiling mounting



TEXT.LICHTVERTEILUNG

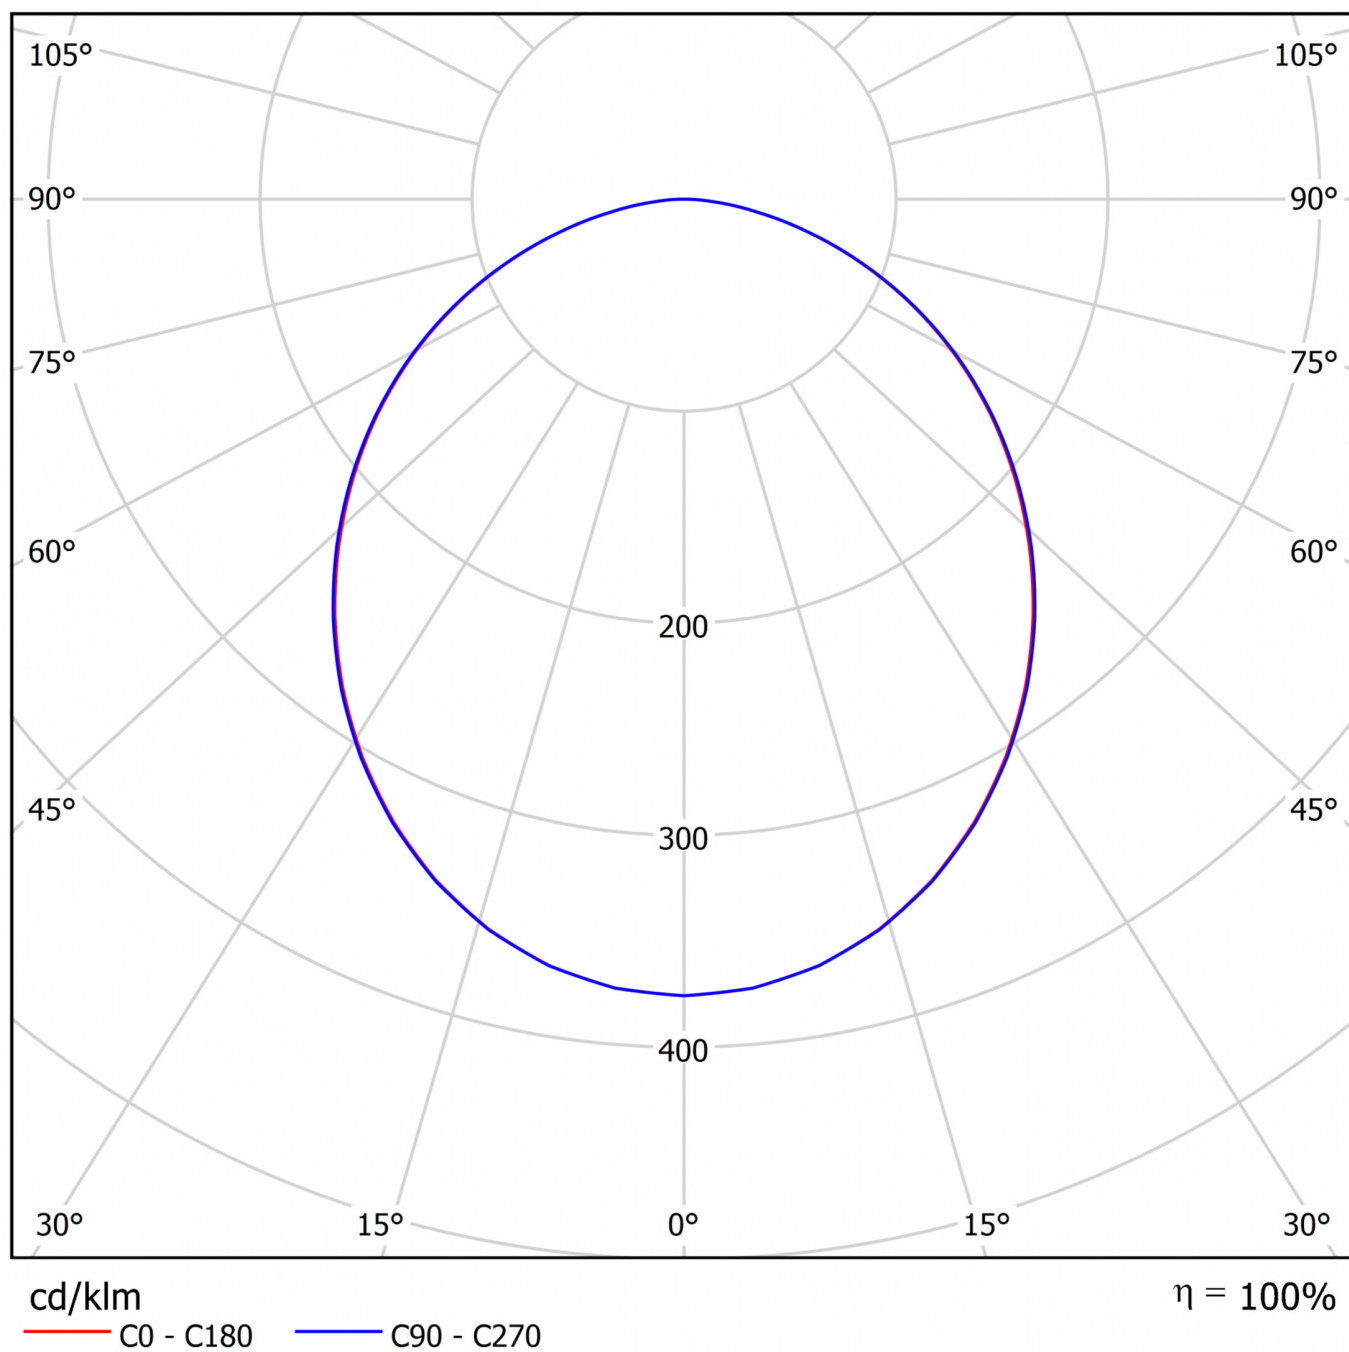

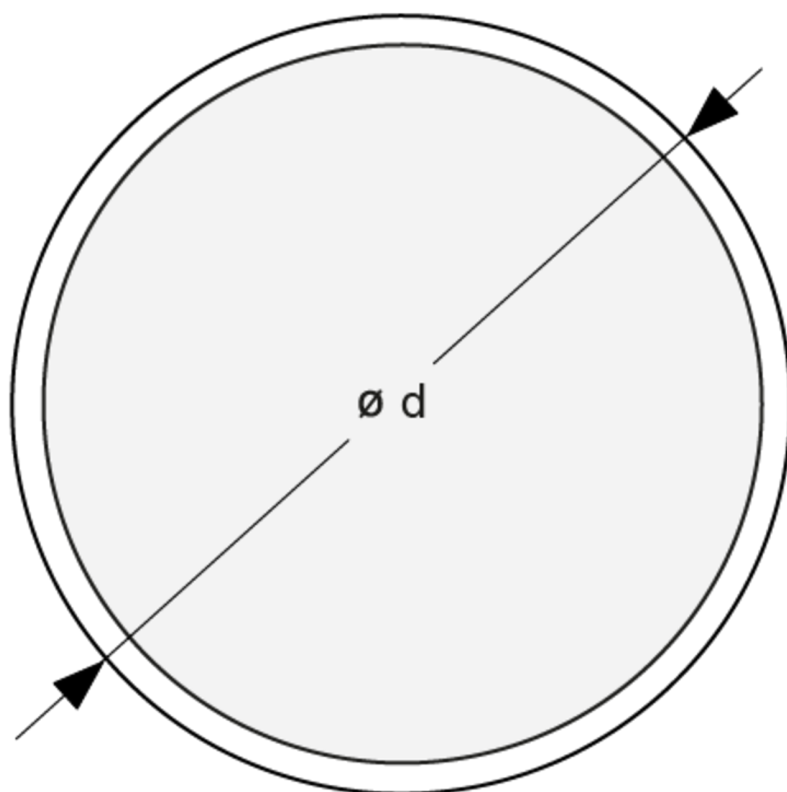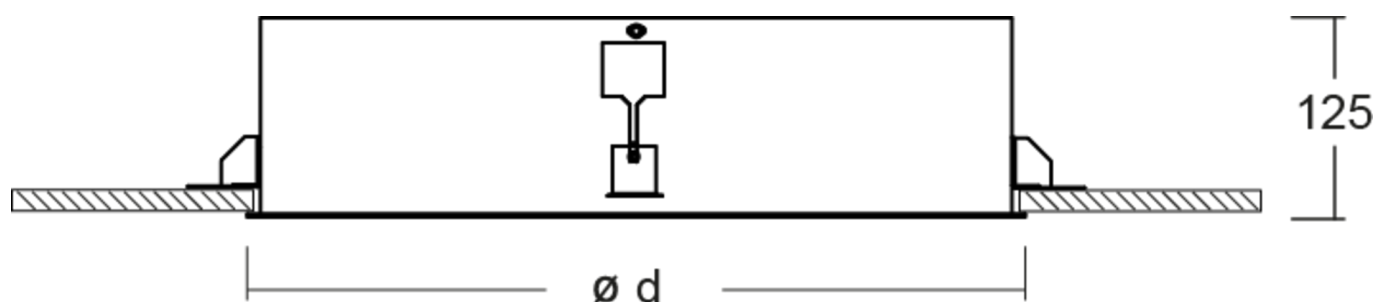

As of: 17.03.2026 - Subject to technical changes and errors.