



Art.-Nr: YWDZO-LANS-1901-D

**LED lamp "ZORRO", wall / ceiling surface mounting,
600x165x63mm, 19W, 2200lm 4000K, CRI >80, IP40,
switchable**

**Robust, switchable LED surface-mounted luminaire (IP40) for
versatile wall or ceiling mounting, made of powder-coated
sheet steel.**



LED ceiling- and wall-mounted luminaire, ZORRO. Housing made from steel plate, white, powder-coated. Diffuser made from plastic (PC), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible. NANO protection on request.



More information

www.rp-group.com/en/item/YWDZO-LANS-1901-D



TECHNICAL DATA


Dimensions	
Product dimensions Length	600 mm
Product dimensions Width	165 mm
Product dimensions Height	63 mm
Product weight	1.4 kg
Packaging dimensions	
Packaging dimensions Length	704 mm
Packaging dimensions Width	166 mm
Packaging dimensions Height	57 mm
Weight incl. packaging	1.7 kg
Color	
Color	White
Housing material	
Housing material	Steel sheet
Certification	
Certification	CE
Insulation class	1
Protection type (IP)	IP40




Electrical connection	
Connection cross-section	2.5 mm ²
System performance	19 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	20 A
Power factor	0.9 PF
Starting time	200 µs
power supply	
Number of power supply units at LS C16A	60 pcs.
Electrical design	with internal control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	2200 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	90 °
Color temperature	4000 K
Light color	840
UGR	26
Service life	75000 h, L80
Light yield	116 lm/w
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+25 °C
Mounting	
Mounting	Surface mounting



TEXT.LICHTVERTEILUNG

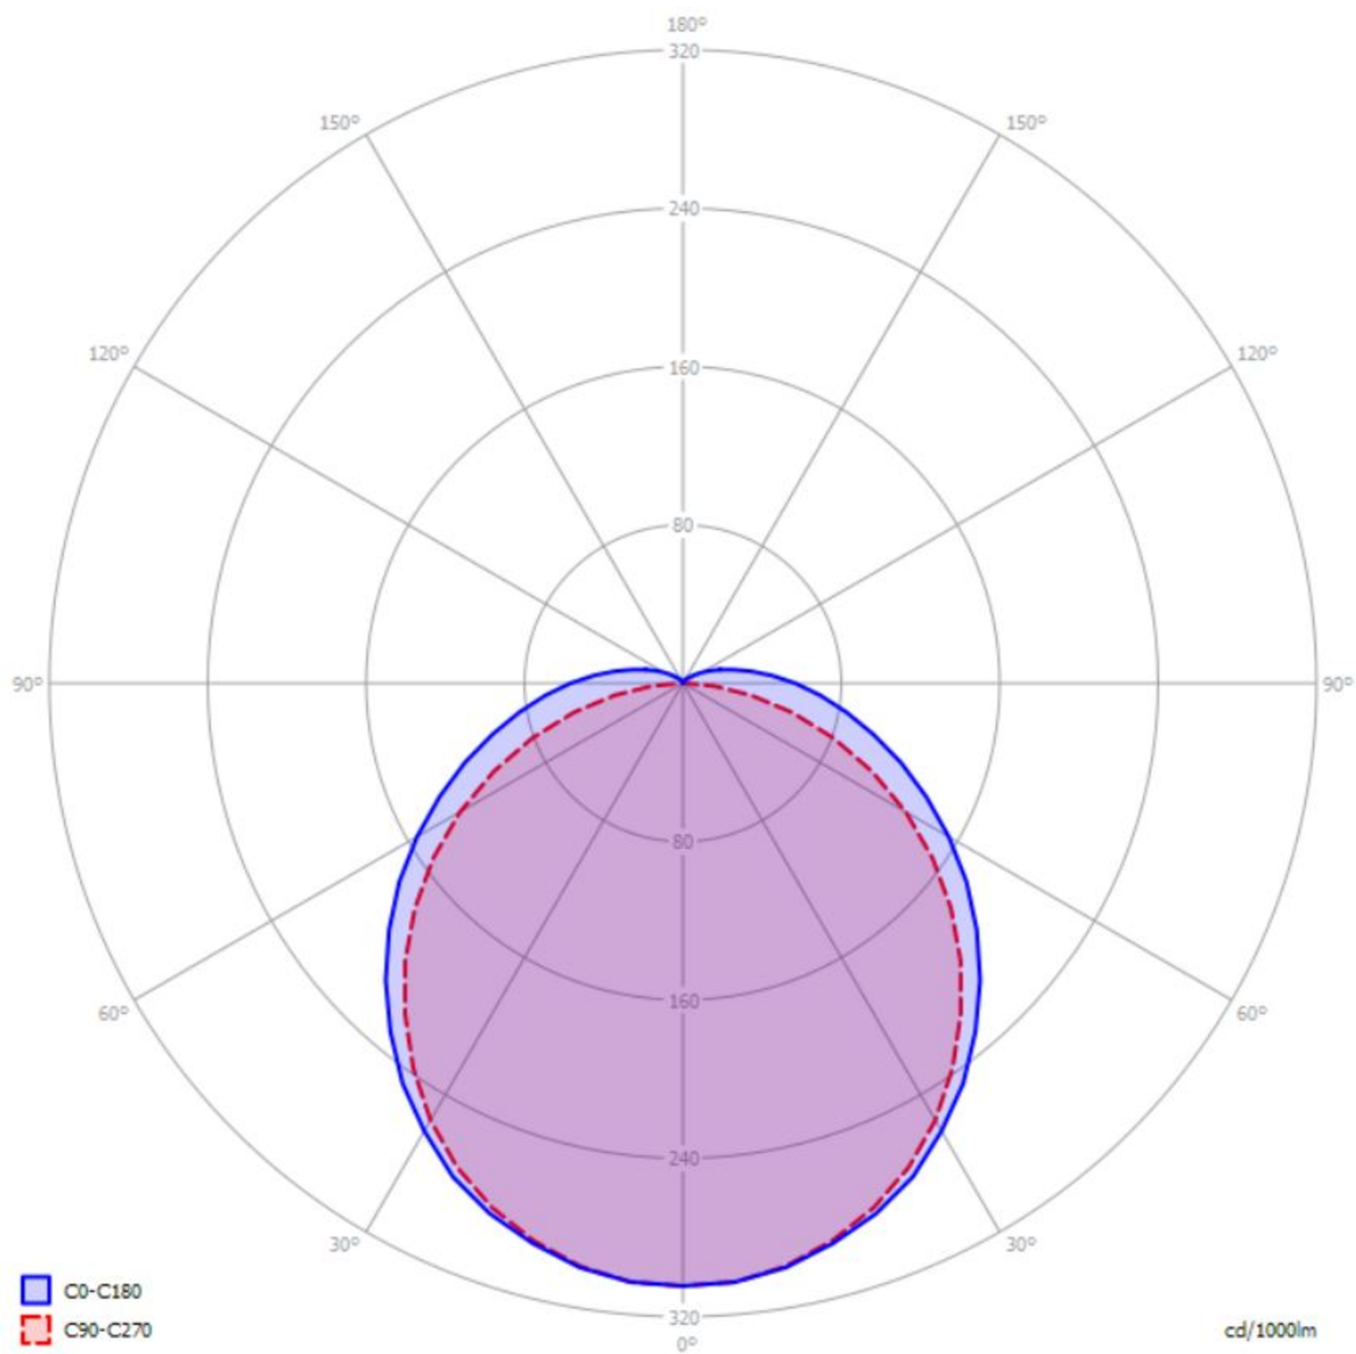

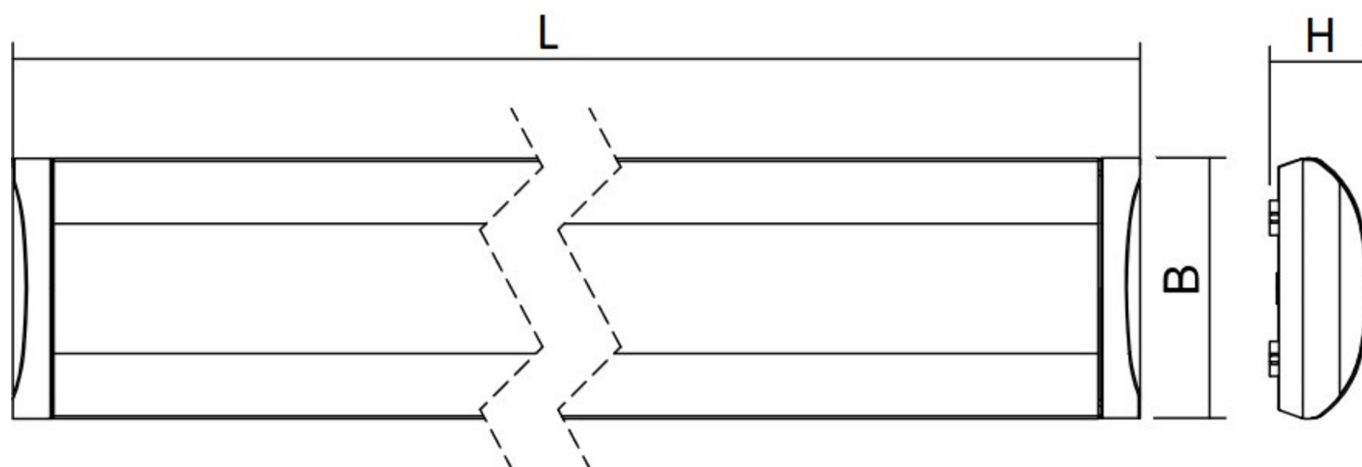

As of: 17.03.2026 - Subject to technical changes and errors.