




Art.-Nr: YWDMA-LANS-6101-D

LED luminaire "MAVS", ceiling surface mounting, rectangular, 1975x59x79mm, 61W, 6450lm, 4000K, CRI >80, IP40, white, switchable

Extremely slim LED lighting solution (1975 x 59 x 79 mm) with high-quality aluminium housing and UV-stabilised PMMA diffuser. Ideal for long corridors and commercial applications.

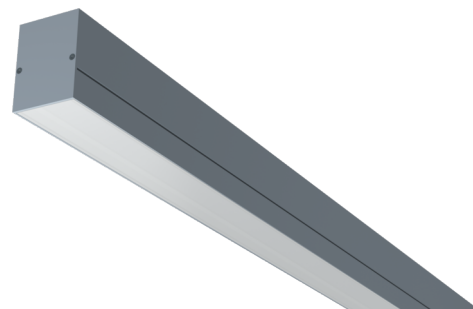

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with

CASAMBI® Bluetooth control available. DC compatible.



More information

www.rp-group.com/en/item/YWDMA-LANS-6101-D



TECHNICAL DATA


Dimensions	
Product dimensions Length	1975 mm
Product dimensions Width	59 mm
Product dimensions Height	79 mm
Product weight	4.8 kg
Packaging dimensions	
Packaging dimensions Length	2010 mm
Packaging dimensions Width	123 mm
Packaging dimensions Height	101 mm
Weight incl. packaging	5.7 kg
Color	
Color	Anodised aluminium
Housing material	
Housing material	Aluminium
Certification	
Certification	CE
Insulation class	1



Protection type (IP)	IP40
Electrical connection	
Connection cross-section	2.5 mm ²
System performance	61 W
Input voltage AC	220-240V / 50-60Hz V
Starting current	29 A
Power factor	0.9 PF
Starting time	143 µs
power supply	
Number of power supply units at LS C16A	42 pcs.
DC suitability	Yes
Electrical design	with internal control gear, Switchable
Light data	
Light source	LED
Rated luminous flux	6450 lm
Colour rendering index	> 80 Ra
Colour tolerance	3
Beam angle	60 °
Color temperature	4000 K
Light color	840
UGR	26.2
Service life	75000 h, L80
Light yield	106 lm/w
Temperatures	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+30 °C
Mounting	
Mounting	Surface mounting



TEXT.LICHTVERTEILUNG

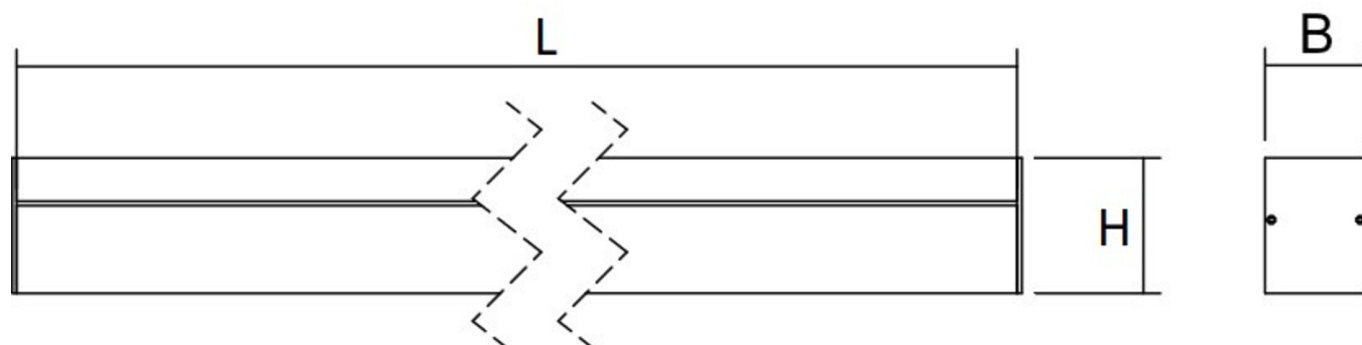



ACCESSORY LIST

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm²

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.