



**Art.-Nr: ZAW013WB-AZ-COOLIP54**  
**Emergency light Self-contained**  
**Wall mounting, 3 h, IP65, Zinc die-cast, Anthracite**

Robust, zinc die-cast wall surface-mounted luminaire for illuminating escape and emergency routes.

Particularly suited to illuminating escape and emergency routes at the exit and outside the building up to a safe zone. The radiating characteristics distribute the light parallel to the wall.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic.



More information

[www.rp-group.com/en/item/ZAW013WB-AZ-COOLIP54](http://www.rp-group.com/en/item/ZAW013WB-AZ-COOLIP54)




## TECHNICAL DATA

|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Emergency light             |
| Mounting               | Wall mounting               |
| Pictograph             | No                          |
| Illuminant             | LED                         |
| Housing material       | Zinc die-cast               |
| Housing color          | Anthracite                  |
| Protection type (IP)   | IP65                        |
| Impact resistance (IK) | 8                           |
| Certification          | WEEE, CE                    |
| Insulation class       | 1                           |
| Supply                 | Self-contained              |
| Monitoring             | Wireless Basic (WB)         |
| Bridging time          | 3 h                         |
| Battery                | LiFePO4 3,2 V/3,3 Ah        |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |
| Input frequency        | 50 / 60 Hz                  |
| Input voltage DC       | - V                         |
| Power max.             | 5,3 W                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power maintained                        | 3,9 W               |
| Power non-maintained                    | 1,5 W               |
| Ambient temperature maintained mode     | -25 °C to 35 °C     |
| Ambient temperature non-maintained mode | -25 °C to 40 °C     |
| Depth                                   | 315 mm              |
| Width                                   | 65 mm               |
| Height                                  | 140 mm              |
| Weight                                  | 2.1                 |
| Weight incl. packaging                  | 2.22                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Connector           |
| Dimming function                        | No                  |
| Luminous flux mains                     | 190 lm              |
| Luminous flux emergency                 | 190 lm              |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260659560997       |

## TECHNICAL DRAWING

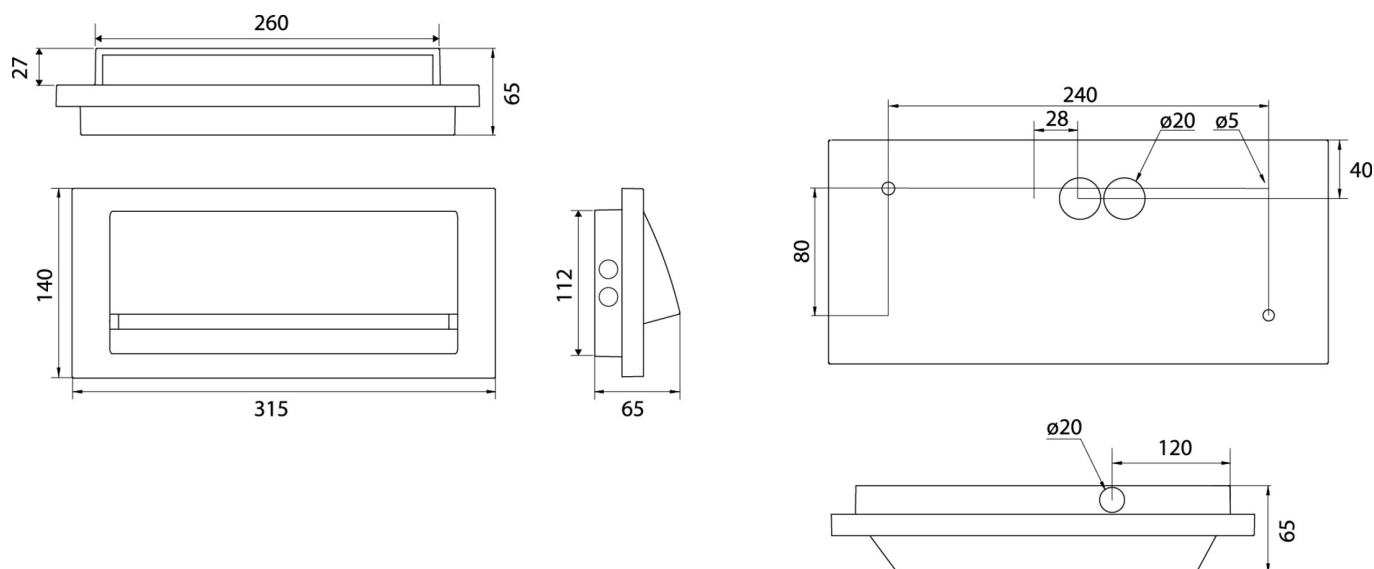

As of: 12.09.2026 - Subject to technical changes and errors.