RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## Art.-Nr: XPIU009ML
## Emergency light Centralised power supply systems Universal, Central power supply (ML), CPS, IP66, Aluminum die-cast, Polycarbonate, RAL 5010



Polycarbonate cylinder safety luminaire with explosion protection for gas and dust Ex zones.

Prepared for two cable entries for feed-through wiring. By attaching a pictogram, can also be used as an emergency exit sign luminaire.

By means of mounting adapter for wall/ceiling mounting or suspension by means of eye bolt.

Labelling according to 2014/34/EC (ATEX)

Zone 1 / zone 21 gas and dust

- Ex d IIB T6 Gb / Ex d IIB T6 Gb
- Ex t IIIC T85ºC Db

Manufactured in accordance with
-EN 60079-0:2018, EN 60079-1:2014, EN 60079-31:2014

-Certified by INERIS 20ATEX0005X

Control and monitoring via central power supply system.


More information
www.rp-group.com/en/item/XPIU009ML

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Aluminum die-cast, Polycarbonate |
| Housing color | RAL 5010 |
| Protection type (IP) | IP66 |
| Impact resistance (IK) | 5 |
| Certification | Waste disposal, CE, Explosion-proof |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |

| | |
|---|---|
| Bridging time | CPS |
| Battery | / |
| Operating mode | Permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Power max. | 11 W |
| Power maintained | 11 W |
| Power non-maintained | 1,5 W |
| Ambient temperature maintained mode | -20 °C to 55 °C |
| Ambient temperature non-maintained mode | -20 °C to 55 °C |
| Depth | 485 mm |
| Width | 157 mm |
| Height | 197 mm |
| Weight | 4.28 |
| Weight incl. packaging | 4.78 |
| Connection cross-section | 2.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 1200 lm |
| Luminous flux emergency | 1200 lm |
| Customs tariff number | 94051190 |
| GTIN | 4260682145444 |

## TECHNICAL DRAWING

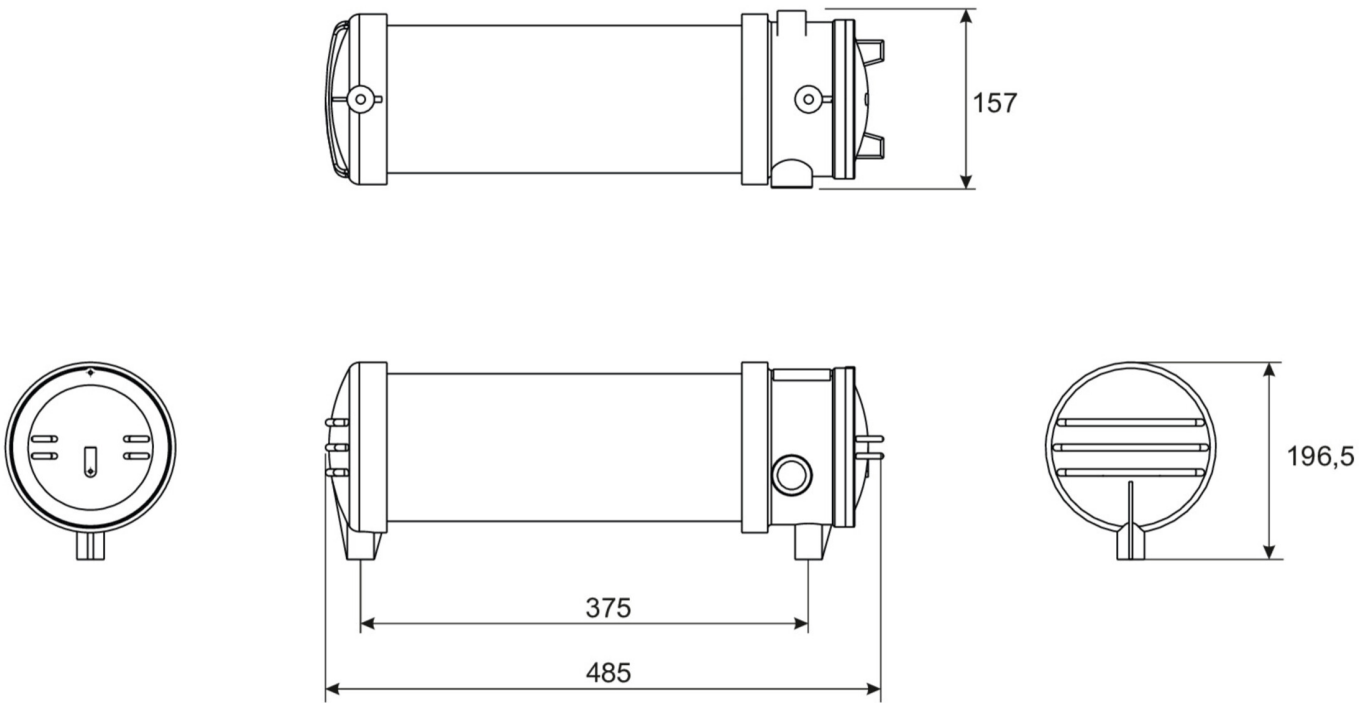


## ACCESSORY LIST

X-KE001 - Professional installation components for emergency lighting systems

X-MB001 - High-quality mounting element for emergency lighting modules (105 x 20 mm)

X4N - Pictogram set with metal bracket for emergency lights XI, XM and XG

X-KO002 - Eye bolts

As of: 14.11.2026 - Subject to technical changes and errors.