RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## Art.-Nr: AGD009ML-E
## Exit sign Centralised power supply systems Surface mounting, Central power supply (ML), CPS, 50m, IP40, Zinc die-cast, Stainless steel, Piktogram as reqired



Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

CE


More information
www.rp-group.com/en/item/AGD009ML-E

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Surface mounting |
| Recognition distance | 50m |
| Pictograph | acc. to Specification |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |

| | |
|---|---|
| Input voltage DC | 216 V |
| Power max. | 6,1 W |
| Power maintained | 6,1 W |
| Power non-maintained | 1,1 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 80 mm |
| Width | 517 mm |
| Height | 330 mm |
| Weight | 2.67 |
| Weight incl. packaging | 3.32 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| GTIN | 4260659565282 |

## TECHNICAL DRAWING

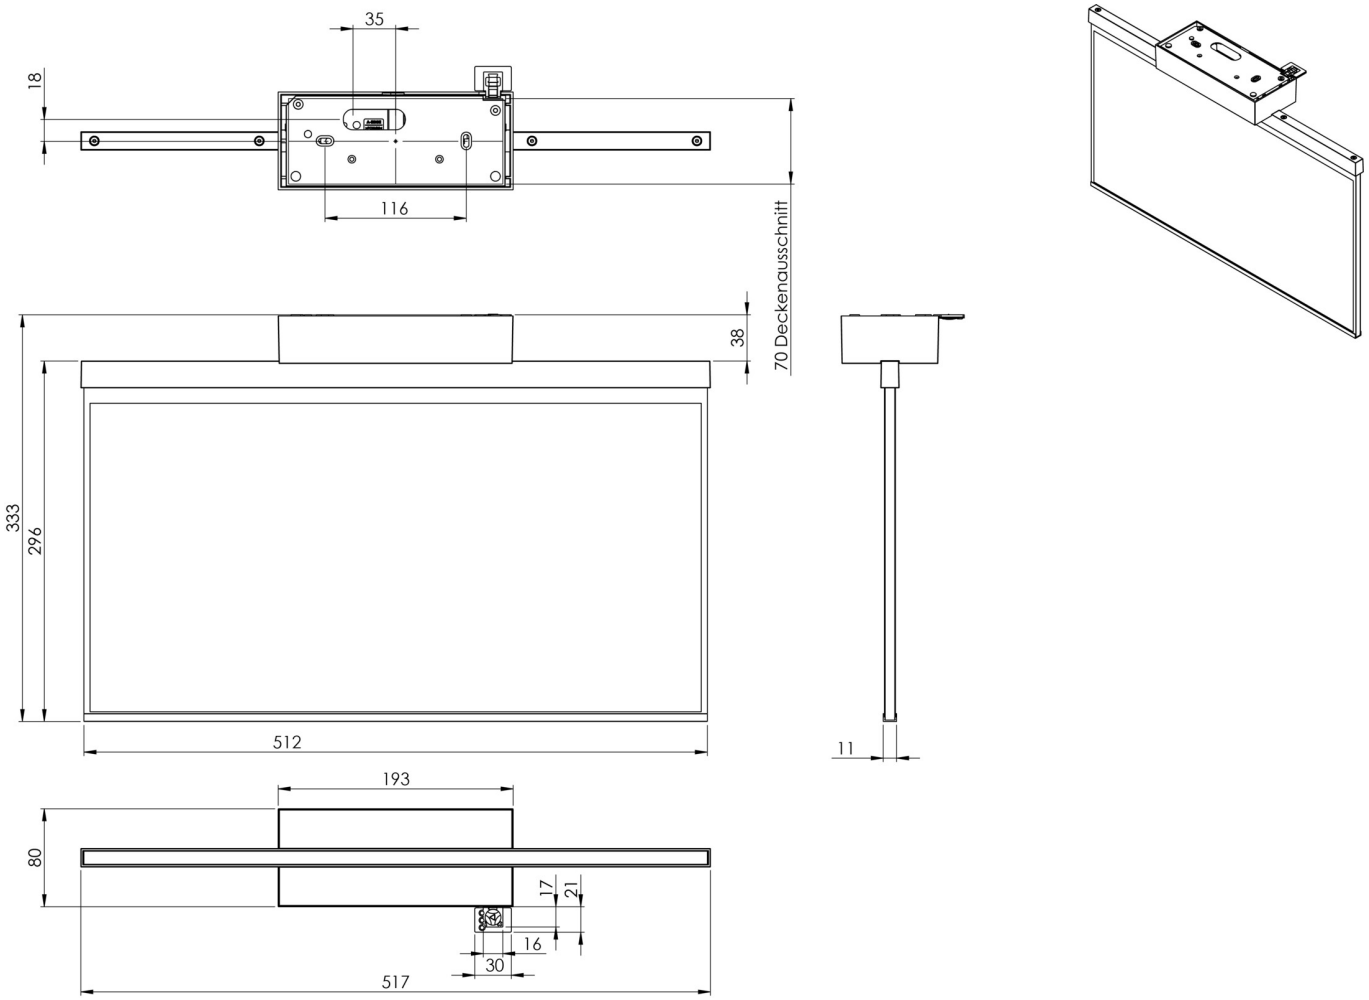


## ACCESSORY LIST

AM-X-APA-E - Flexible surface-mounted adapter for easy installation in stainless steel look

## RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|---|---|---|---|---|---|---|---|---|---|---|
| AGD009ML |  | Central power supply (ML) | Central power supply | RAL 9003 | €€€ | Yes | low | Yes | 1,920 per system | central |
| AGD009ML-AZ |  | Central power supply (ML) | Central power supply | RAL 7016 | €€€ | Yes | low | Yes | 1,920 per system | central |