RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: AGDC009-AZ
Exit sign Centralised power supply systems Rope ceiling structure, Without monitoring, CPS, 50m, IP40, Zinc die-cast, Anthracite, Piktogram as reqired



Modern zinc die-cast emergency exit sign luminaire with wire suspension for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

CE

More information
www.rp-group.com/en/item/AGDC009-AZ

TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Rope ceiling structure
Recognition distance	50m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Input voltage DC	100-254 V
Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	80 mm
Width	512 mm
Height	338 mm
Weight	2.64
Weight incl. packaging	3.29
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
GTIN	4260659565398

TECHNICAL DRAWING

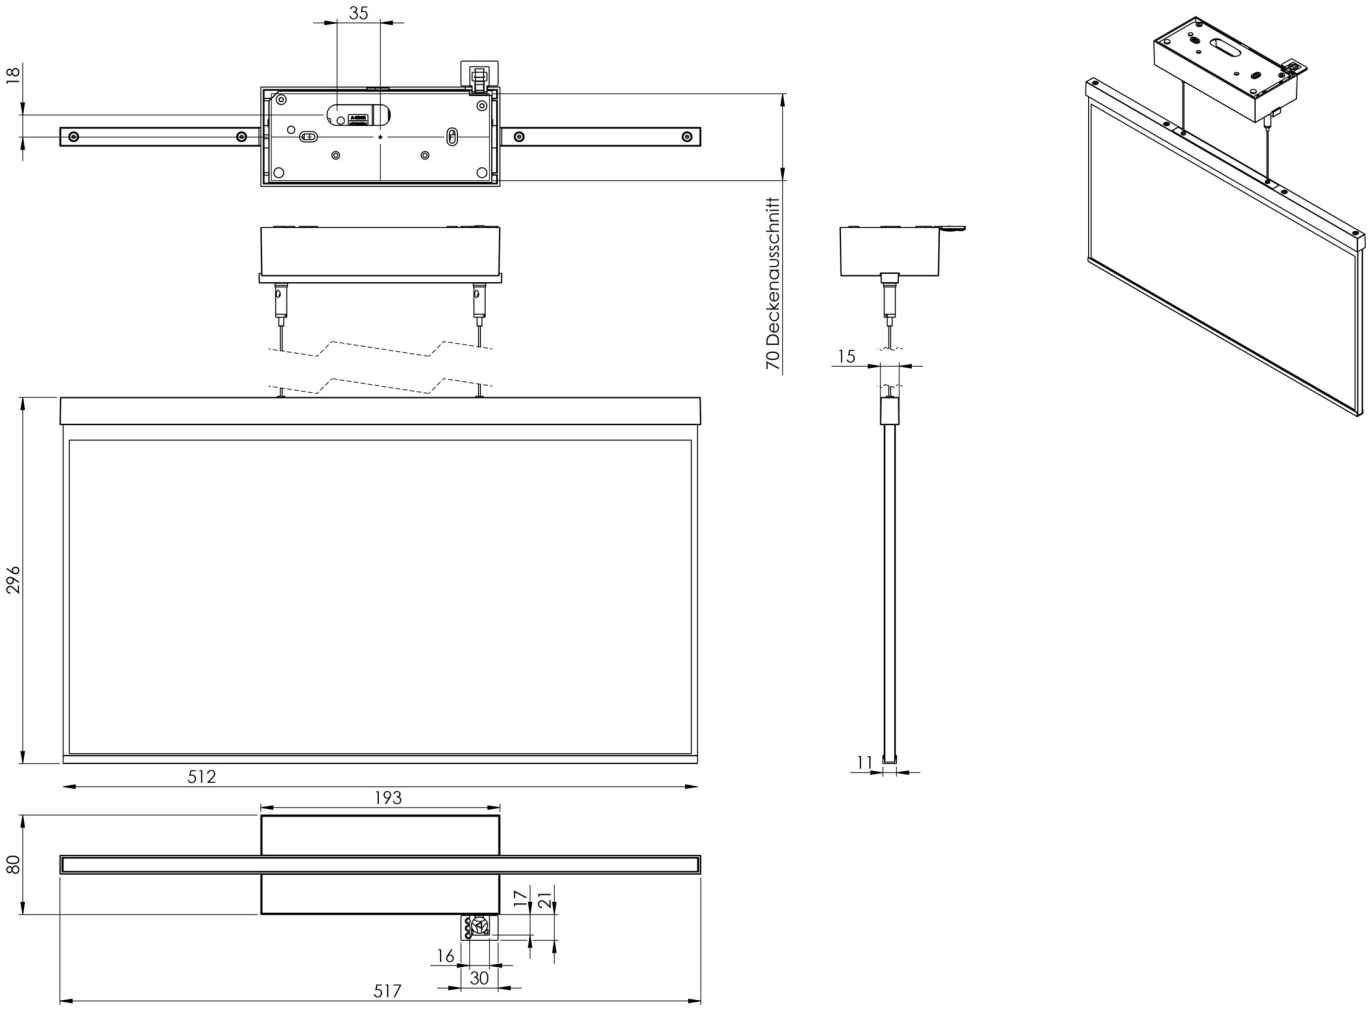

As of: 02.11.2026 - Subject to technical changes and errors.