Art.-Nr: AGD009-E
Exit sign Centralised power supply systems Surface mounting, Without monitoring, CPS, 50m, IP40, Zinc die-cast, Stainless steel, Piktogram as reqired



Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

CE


More information
www.rp-group.com/en/item/AGD009-E

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	50m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Stainless steel
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz

Input voltage DC	100-254 V
Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	0 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	80 mm
Width	517 mm
Height	330 mm
Weight	2.64
Weight incl. packaging	3.29
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
GTIN	4260659565251

TECHNICAL DRAWING

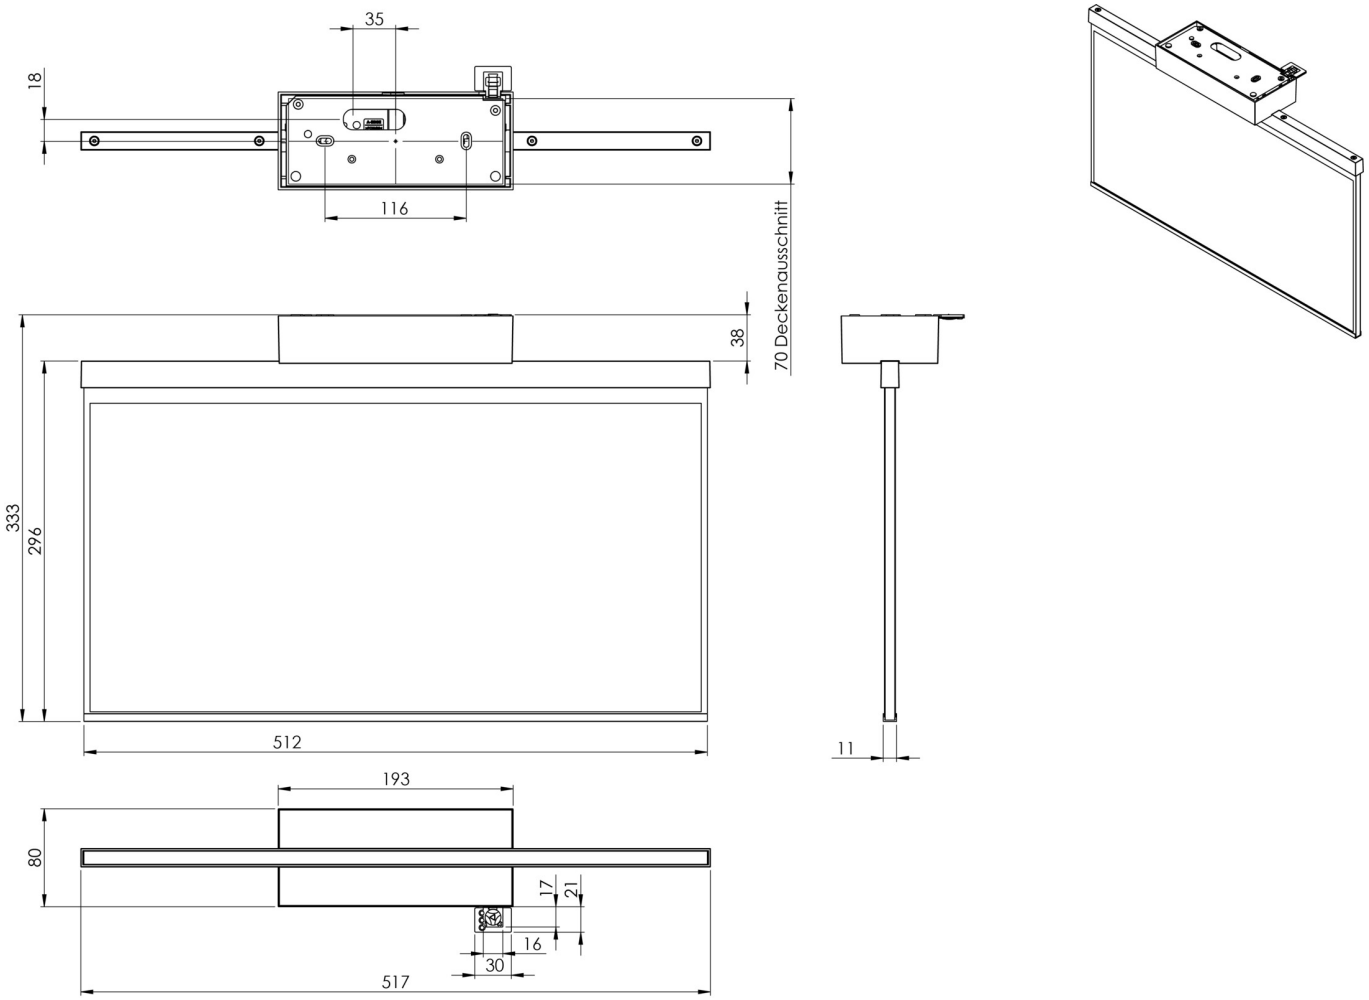

ACCESSORY LIST

AM-X-APA-E - Flexible surface-mounted adapter for easy installation in stainless steel look

As of: 02.11.2026 - Subject to technical changes and errors.